


745 - Oblò J 2.0 - DALI 2

Code: 112600-3941

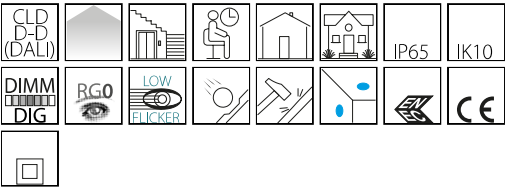

Oblò J 2.0 is Disano's new easy-to-install wall/ceiling light fixture featuring an extremely resistant self-extinguishing polycarbonate housing (IK10) with a greater degree of protection (IP65) and double insulation. It comprises high-efficiency LED sources that ensure notable energy savings.

Its minimalist and compact design makes it suitable for any outdoor application, especially balconies, porches, and terraces, as well as for indoor use, such as condominium staircases, landings, and common areas. This ceiling fixture has colour temperatures of 3000K and 4000K and a high colour rendering index (CRI>80), guaranteeing effective, pleasant, and safe lighting.



GENERAL INFORMATION

|         |                           |
|---------|---------------------------|
| Article | 745 - Oblò J 2.0 - DALI 2 |
| Code    | 112600-3941               |

DIMENSIONS AND WEIGHT

|                   |        |
|-------------------|--------|
| Height (mm)       | 63 mm  |
| Diameter (Ø) (mm) | 280 mm |
| Weight (Kg)       | 1 kg   |


ELECTRICAL CHARACTERISTICS AND CONTROLS

|                    |                        |
|--------------------|------------------------|
| Voltage type       | AC                     |
| Min Voltage (V)    | 220 V                  |
| Max Voltage (V)    | 240 V                  |
| Min Frequency (Hz) | 50 Hz                  |
| Max Frequency (Hz) | 60 Hz                  |
| Frequency (Hz)     | 50 Hz                  |
| Wiring name        | CLD-D-D                |
| Control interface  | DALI 2                 |
| Power factor       | >0.9                   |
| Insulation class   | Class II               |
| Controllability    | Yes (External control) |

745 - Oblò J 2.0 - DALI 2

Code: 112600-3941

PHOTOMETRIC DATA

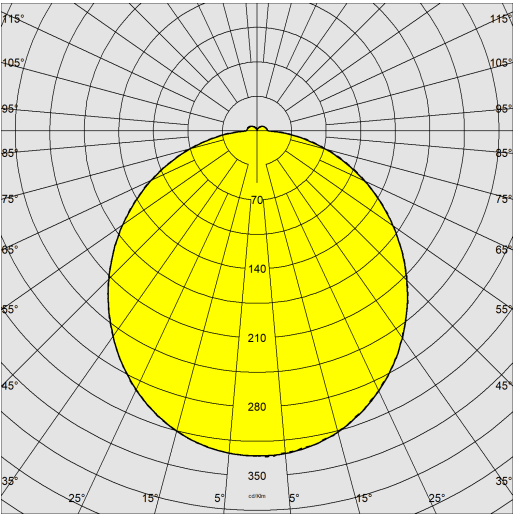

|                              |                      |
|------------------------------|----------------------|
| Distribution type            | Plafone              |
| Lighting source              | LED                  |
| CRI                          | >80                  |
| Luminous flux (output) (lm)  | 1863 lm              |
| Power absorption (total) (W) | 16 W                 |
| CCT                          | 3000 K               |
| Luminous efficacy (lm/W)     | 116 lm/W             |
| LED flux maintenance         | 50000 hr, L 90, B 10 |

MECHANICAL CHARACTERISTICS

|                               |      |
|-------------------------------|------|
| Impact resistance rating (IK) | IK10 |
| IP                            | 65   |



745 - Oblò J 2.0 - DALI 2

Code: 112600-3941

MATERIALS AND COLOURS

|           |                                                       |
|-----------|-------------------------------------------------------|
| Housing   | vandal-resistant, self-extinguishing polycarbonate.   |
| Diffuser  | In clear polycarbonate, anti-dazzle, vandal resistant |
| Colour    | White                                                 |
| Equipment | supplied with bracket for ceiling/wall installation.  |

EMERGENCY LIGHTING


|                             |             |
|-----------------------------|-------------|
| Emergency power supply type | Not present |
|-----------------------------|-------------|

STANDARDS AND COMPLIANCE

|                              |                                                                                |
|------------------------------|--------------------------------------------------------------------------------|
| Photobiological safety class | RG0                                                                            |
| Markings and tests           | CE, ENEC                                                                       |
| Reference standards          | EN60598-1. They have a degree of protection according to the EN60529 standard. |
| Energy Label                 | C                                                                              |

WARRANTY

|                      |      |
|----------------------|------|
| After sales warranty | 5 yr |
|----------------------|------|



Ø 280



63

DOWNLOAD

MOUNTS

AssemblyInstructions 745 10-22.pdf

DESIGNS

BIM 745 - Oblo j 2 0 - DALI2 12-24.zip

TechnicalDrawing obloj.dxf

