


745 - Oblò J 2.0 - EM EC

Code: 112601-0050

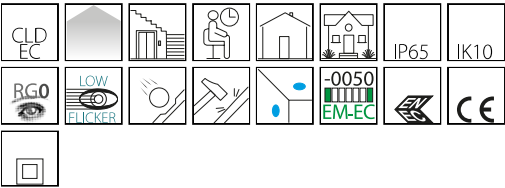

Oblò J 2.0 is Disano's new easy-to-install wall/ceiling light fixture featuring an extremely resistant self-extinguishing polycarbonate housing (IK10) with a greater degree of protection (IP65) and double insulation. It comprises high-efficiency LED sources that ensure notable energy savings.

Its minimalist and compact design makes it suitable for any outdoor application, especially balconies, porches, and terraces, as well as for indoor use, such as condominium staircases, landings, and common areas. This ceiling fixture has colour temperatures of 3000K and 4000K and a high colour rendering index (CRI>80), guaranteeing effective, pleasant, and safe lighting.



GENERAL INFORMATION

Article	745 - Oblò J 2.0 - EM EC
Code	112601-0050

DIMENSIONS AND WEIGHT

Height (mm)	63 mm
Diameter (Ø) (mm)	280 mm
Weight (Kg)	1 kg


ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Min Frequency (Hz)	50 Hz
Max Frequency (Hz)	60 Hz
Frequency (Hz)	50 Hz
Wiring name	CLD-EC
Power factor	>0.9
Insulation class	Class II
Controllability	None

745 - Oblò J 2.0 - EM EC

Code: 112601-0050

PHOTOMETRIC DATA

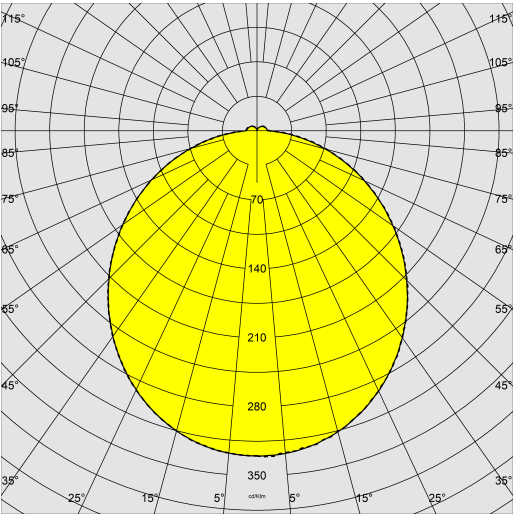

Distribution type	Plafone
Lighting source	LED
CRI	>80
Luminous flux (output) (lm)	2898 lm
Power absorption (total) (W)	21 W
CCT	4000 K
Luminous efficacy (lm/W)	138 lm/W
LED flux maintenance	50000 hr, L 90, B 10

MECHANICAL CHARACTERISTICS


Impact resistance rating (IK)	IK10
IP	65



745 - Oblò J 2.0 - EM EC

Code: 112601-0050

MATERIALS AND COLOURS



Ø 280



63

DOWNLOAD

MOUNTS

AssemblyInstructions 745 10-22.pdf

DESIGNS

TechnicalDrawing obloj.dxf



Housing	vandal-resistant, self-extinguishing polycarbonate.
Diffuser	In clear polycarbonate, anti-dazzle, vandal resistant.
Colour	White
	supplied with bracket for ceiling/wall installation.
Equipment	EM EC: with emergency wiring supplied by centralised power unit: permanent luminaire, with power supply unit operating in AC/DC, powered by a central emergency unit (NOT incorporated into the luminaire).

EMERGENCY LIGHTING

Emergency power supply type	Centralised system with battery
-----------------------------	---------------------------------

STANDARDS AND COMPLIANCE

Photobiological safety class	RG0
Markings and tests	CE, ENEC
Reference standards	EN60598-1. They have a degree of protection according to the EN60529 standard. EN 60598-2-22.
Energy Label	C

WARRANTY

After sales warranty	5 yr
----------------------	------