


745 - Oblò J 2.0 - EM 3h S.A.

Code: 112601-3128

GENERAL INFORMATION

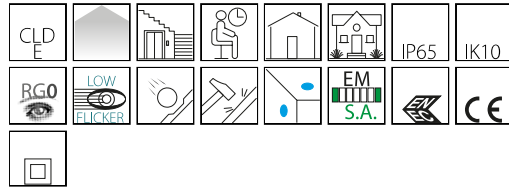

| | |
|---------|-------------------------------|
| Article | 745 - Oblò J 2.0 - EM 3h S.A. |
| Code | 112601-3128 |

DIMENSIONS AND WEIGHT

| | |
|-------------------|--------|
| Height (mm) | 63 mm |
| Diameter (Ø) (mm) | 280 mm |
| Weight (Kg) | 1.5 kg |

ELECTRICAL CHARACTERISTICS AND CONTROLS

| | |
|--------------------|----------|
| Voltage type | AC |
| Min Voltage (V) | 220 V |
| Max Voltage (V) | 240 V |
| Min Frequency (Hz) | 50 Hz |
| Max Frequency (Hz) | 60 Hz |
| Frequency (Hz) | 50 Hz |
| Wiring name | CLD-E |
| Power factor | >0.9 |
| Insulation class | Class II |
| Controllability | None |



Oblò J 2.0 is Disano's new easy-to-install wall/ceiling light fixture featuring an extremely resistant self-extinguishing polycarbonate housing (IK10) with a greater degree of protection (IP65) and double insulation. It comprises high-efficiency LED sources that ensure notable energy savings.

Its minimalist and compact design makes it suitable for any outdoor application, especially balconies, porches, and terraces, as well as for indoor use, such as condominium staircases, landings, and common areas. This ceiling fixture has colour temperatures of 3000K and 4000K and a high colour rendering index (CRI>80), guaranteeing effective, pleasant, and safe lighting.



745 - Oblò J 2.0 - EM 3h S.A.

Code: 112601-3128

PHOTOMETRIC DATA



| | |
|------------------------------|----------------------|
| Distribution type | Plafone |
| Lighting source | LED |
| CRI | >80 |
| Luminous flux (output) (lm) | 2695 lm |
| Power absorption (total) (W) | 24 W |
| CCT | 3000 K |
| Luminous efficacy (lm/W) | 112 lm/W |
| LED flux maintenance | 50000 hr, L 90, B 10 |

MECHANICAL CHARACTERISTICS


| | |
|-------------------------------|-------|
| Impact resistance rating (IK) | IK10 |
| IP | 65 |
| Ambient temperature - min | 5 °C |
| Ambient temperature - max | 35 °C |



745 - Oblò J 2.0 - EM 3h S.A.

Code: 112601-3128

MATERIALS AND COLOURS



Ø 280



69

DOWNLOAD

MOUNTS

[AssemblyInstructions 745 10-22.pdf](#)

DESIGNS

[TechnicalDrawing obloj.dxf](#)



| | |
|-----------|--|
| Housing | vandal-resistant, self-extinguishing polycarbonate. |
| Diffuser | In clear polycarbonate, anti-dazzle, vandal resistant. |
| Colour | White |
| Equipment | supplied with bracket for ceiling/wall installation. |

EMERGENCY LIGHTING

| | |
|-----------------------------|------------------------|
| Emergency power supply type | Luminaire with battery |
| Type of emergency | S.A. |
| Emergency luminous flux (%) | 3% |
| Emergency operation time | 3h |

STANDARDS AND COMPLIANCE

| | |
|------------------------------|--|
| Photobiological safety class | RG0 |
| Markings and tests | CE, ENEC |
| Reference standards | EN60598-1. They have a degree of protection according to the EN60529 standard. |
| Energy Label | C |

WARRANTY

| | |
|----------------------|------|
| After sales warranty | 5 yr |
|----------------------|------|