


746 - Oblò 2.0 - ø220

Code: 112626-00

GENERAL INFORMATION

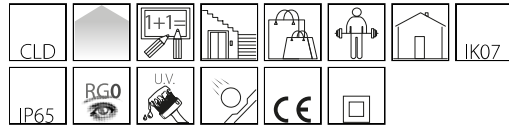

| | |
|---------|-----------------------|
| Article | 746 - Oblò 2.0 - ø220 |
| Code | 112626-00 |

DIMENSIONS AND WEIGHT

| | |
|-------------------|--------|
| Height (mm) | 55 mm |
| Diameter (Ø) (mm) | 220 mm |
| Weight (Kg) | 1 kg |

ELECTRICAL CHARACTERISTICS AND CONTROLS

| | |
|--------------------|----------|
| Voltage type | AC |
| Min Voltage (V) | 220 V |
| Max Voltage (V) | 240 V |
| Min Frequency (Hz) | 50 Hz |
| Max Frequency (Hz) | 60 Hz |
| Frequency (Hz) | 50 Hz |
| Wiring name | CLD |
| Power factor | >0.9 |
| Insulation class | Class II |
| Controllability | None |




Oblò 2.0 is Disano's new easy-to-install light fixture featuring a refreshed design and an upgraded technological gear to offer the highest possible energy savings and LED light quality. Oblò 2.0 is a complete range of robust and reliable fixtures for outdoor or indoor wall mounting, and a self-extinguishing IP65-rated polycarbonate housing and double insulation. The Oblò family includes fixtures of different sizes and with different wattages so that you can choose the most suitable solution for your needs. High quality LED light, with color temperatures of 3000 and 4000K and high color rendering index (CRI ≥ 83) are always a guarantee of effective, pleasant and safe lighting.



746 - Oblò 2.0 - ø220

Code: 112626-00

PHOTOMETRIC DATA

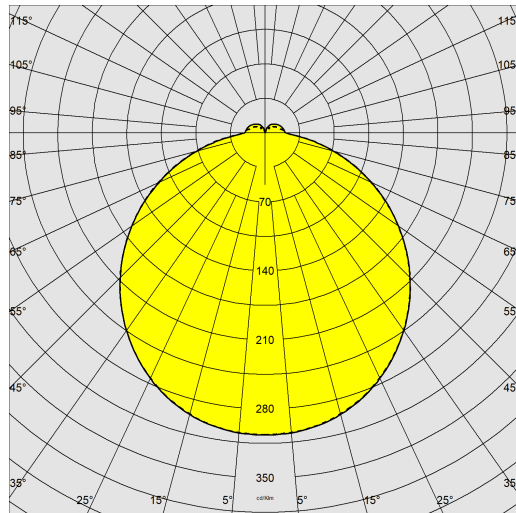

| | |
|------------------------------|--|
| Lighting source | LED |
| CRI | 83 |
| Luminous flux (output) (lm) | 1444 lm |
| Power absorption (total) (W) | 15 W |
| CCT | 4000 K |
| Luminous efficacy (lm/W) | 96 lm/W |
| Low Flicker | светильник с очень низким мерцанием: равномерный свет для большей визуальной безопасности. |
| LED flux maintenance | 33000 hr, L 80, B 20 |

MECHANICAL CHARACTERISTICS


| | |
|-------------------------------|------|
| Impact resistance rating (IK) | IK07 |
| IP | 65 |



746 - Oblò 2.0 - ø220

Code: 112626-00

MATERIALS AND COLOURS



Ø 220



55

DOWNLOAD

MOUNTS

[AssemblyInstructions oblo 2 0 03 23.pdf](#)

DESIGNS

[BIM 746 - Oblo 2 0.zip](#)

[TechnicalDrawing 746n.dxf](#)



| | |
|--------------------------------|---|
| Housing | in polycarbonate, shatterproof and V2 self-extinguishing, UV stabilised, anti-yellowing. |
| Diffuser | in polycarbonate, shatterproof and V2 self-extinguishing, UV stabilised. |
| Coating | epoxy polyester powder coating resistant to UV rays. |
| Special coating (UPON REQUEST) | upon request: available with coating tested to withstand corrosion tests in aggressive artificial atmospheres (UNI EN ISO 9227) or marine environments (sea front). |
| Colour | White |
| Equipment | gasket in eco-friendly material. Rubber cable gland with diam. 1/2 gas inch (cable min. diam.9 max diam. 12). |

STANDARDS AND COMPLIANCE

| | |
|------------------------------|--|
| Photobiological safety class | RG0 |
| Markings and tests | CE |
| Reference standards | EN60598-1. They have a degree of protection according to the EN60529 standard. |
| Energy Label | E |

WARRANTY

| | |
|----------------------|------|
| After sales warranty | 3 yr |
|----------------------|------|