


## 746 - Oblò 2.0 - ø220

Code: 112626-39

### GENERAL INFORMATION

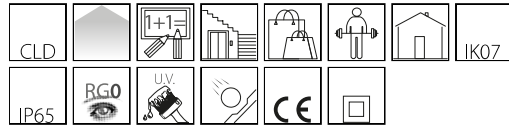

Article	746 - Oblò 2.0 - ø220
Code	112626-39

### DIMENSIONS AND WEIGHT

Height (mm)	55 mm
Diameter (Ø) (mm)	220 mm
Weight (Kg)	1 kg

### ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Min Frequency (Hz)	50 Hz
Max Frequency (Hz)	60 Hz
Frequency (Hz)	50 Hz
Wiring name	CLD
Power factor	>0.9
Insulation class	Class II
Controllability	None




Oblò 2.0 is Disano's new easy-to-install light fixture featuring a refreshed design and an upgraded technological gear to offer the highest possible energy savings and LED light quality. Oblò 2.0 is a complete range of robust and reliable fixtures for outdoor or indoor wall mounting, and a self-extinguishing IP65-rated polycarbonate housing and double insulation. The Oblò family includes fixtures of different sizes and with different wattages so that you can choose the most suitable solution for your needs. High quality LED light, with color temperatures of 3000 and 4000K and high color rendering index (CRI  $\geq 83$ ) are always a guarantee of effective, pleasant and safe lighting.



## 746 - Oblò 2.0 - ø220

Code: 112626-39

### PHOTOMETRIC DATA

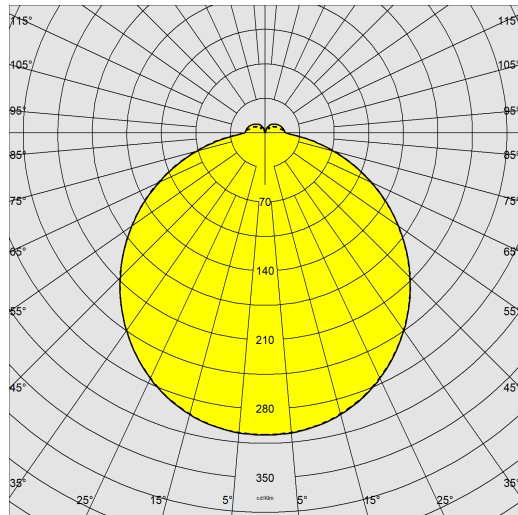

Lighting source	LED
CRI	83
Luminous flux (output) (lm)	1328 lm
Power absorption (total) (W)	15 W
CCT	3000 K
Luminous efficacy (lm/W)	89 lm/W
Low Flicker	светильник с очень низким мерцанием: равномерный свет для большей визуальной безопасности.
LED flux maintenance	33000 hr, L 80, B 20

### MECHANICAL CHARACTERISTICS


Impact resistance rating (IK)	IK07
IP	65



## 746 - Oblò 2.0 - ø220

Code: 112626-39

### MATERIALS AND COLOURS



Ø 220



55

### DOWNLOAD

#### MOUNTS

[AssemblyInstructions oblo 2 0 03 23.pdf](#)

#### DESIGNS

[BIM 746 - Oblo 2 0.zip](#)

[TechnicalDrawing 746n.dxf](#)



Housing	in polycarbonate, shatterproof and V2 self-extinguishing, UV stabilised, anti-yellowing.
Diffuser	in polycarbonate, shatterproof and V2 self-extinguishing, UV stabilised.
Coating	epoxy polyester powder coating resistant to UV rays.
Special coating (UPON REQUEST)	upon request: available with coating tested to withstand corrosion tests in aggressive artificial atmospheres (UNI EN ISO 9227) or marine environments (sea front).
Colour	White
Equipment	gasket in eco-friendly material. Rubber cable gland with diam. 1/2 gas inch (cable min. diam.9 max diam. 12).

### STANDARDS AND COMPLIANCE

Photobiological safety class	RG0
Markings and tests	CE
Reference standards	EN60598-1. They have a degree of protection according to the EN60529 standard.
Energy Label	E

### WARRANTY

After sales warranty	3 yr
----------------------	------