


603 - Disanlens UGR<19

Code: 115520-0041

GENERAL INFORMATION

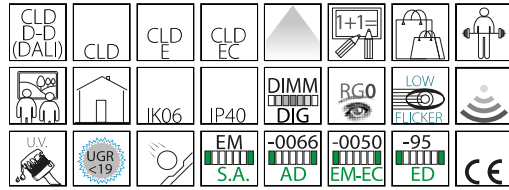


Article	603 - Disanlens UGR<19
Code	115520-0041

DIMENSIONS AND WEIGHT

Length (mm)	594 mm
Width (mm)	152 mm
Height (mm)	55 mm
Weight (Kg)	1.8 kg

ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Min Frequency (Hz)	50 Hz
Max Frequency (Hz)	60 Hz
Frequency (Hz)	50 Hz
Wiring name	CLD-D-D
Control interface	DALI
Power factor	≥0.9
Insulation class	Class I
Controllability	Yes (External control)

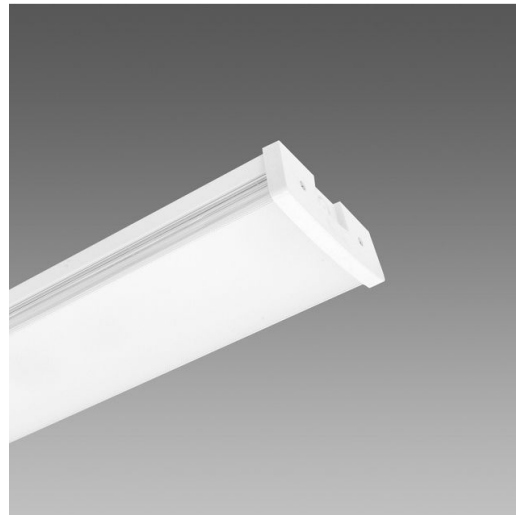


The new Disanlens ceiling fixture is the ideal solution to ensure maximum visual comfort in places like classrooms and offices that require optimal lighting distribution.



603 - Disanlens UGR<19

Code: 115520-0041

PHOTOMETRIC DATA

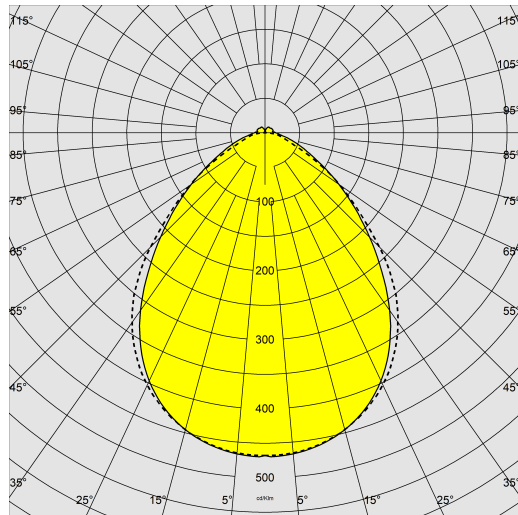

Lighting source	LED
CRI	>80
Luminous flux (output) (lm)	1500 lm
Power absorption (total) (W)	12 W
CCT	4000 K
Luminous efficacy (lm/W)	125 lm/W
Unified glare rating UGR (EN 12464-1) (Reflectance coefficient: ceiling 0.7 - walls 0.5)	UGR<19, according to standard EN 12464.
LED flux maintenance	50000 hr, L 90, B 10

MECHANICAL CHARACTERISTICS

Impact resistance rating (IK)	IK06
IP	40



603 - Disanlens UGR<19

Code: 115520-0041

MATERIALS AND COLOURS

Housing	in pressed steel sheet, white ABS end caps.
Diffuser	in polycarbonate with an outer micro-prismatic finish to control light distribution.
Colour	White
Equipment	- with cable entry grommet and spacers for ceiling/wall mounting. - With vandal resistant closing mechanism.

EMERGENCY LIGHTING

Emergency power supply type	Not present
-----------------------------	-------------

STANDARDS AND COMPLIANCE

Photobiological safety class	RG0
Markings and tests	CE
Reference standards	EN60598-1. They have a degree of protection according to the EN60529 standard. EN 60598-22-2.
Energy Label	C

GEAR

Sensors	
Upon request	Emergency versions

WARRANTY

After sales warranty	3 yr
----------------------	------

152



55



520-1080-1365



594-1233-1535

DOWNLOAD

MOUNTS

[AssemblyInstructions 603-604 10-24.pdf](#)

DESIGNS


[BIM 603 Disanlens 03-25.zip](#)

[TechnicalDrawing 603-604.dxf](#)



603 - Disanlens UGR<19

Code: 115520-0041



2518 Simple suspension