


603 - Disanlens UGR<19

Code: 115522-00

GENERAL INFORMATION

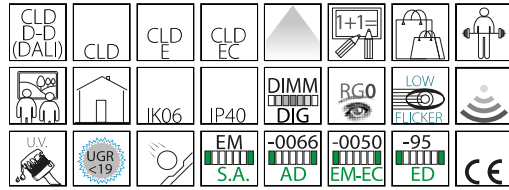


Article	603 - Disanlens UGR<19
Code	115522-00

DIMENSIONS AND WEIGHT

Length (mm)	1535 mm
Width (mm)	152 mm
Height (mm)	55 mm
Weight (Kg)	4.1 kg

ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Min Frequency (Hz)	50 Hz
Max Frequency (Hz)	60 Hz
Frequency (Hz)	50 Hz
Wiring name	CLD
Power factor	≥0.9
Insulation class	Class I
Controllability	None

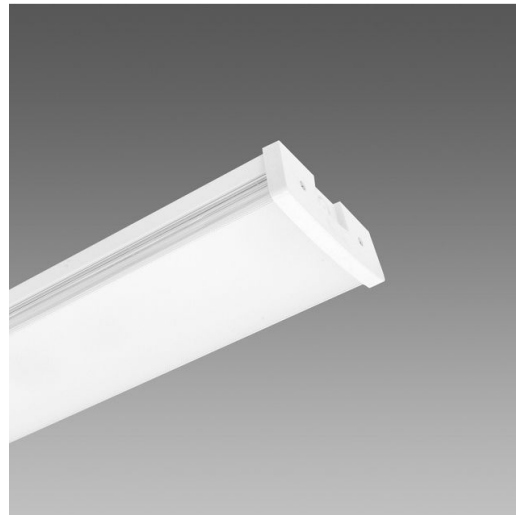


The new Disanlens ceiling fixture is the ideal solution to ensure maximum visual comfort in places like classrooms and offices that require optimal lighting distribution.



603 - Disanlens UGR<19

Code: 115522-00

PHOTOMETRIC DATA

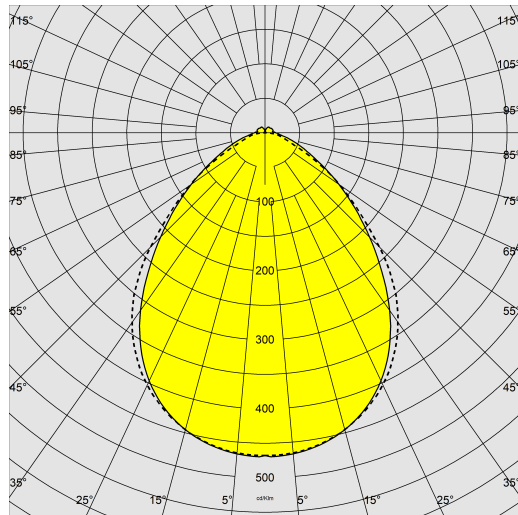

Lighting source	LED
CRI	>80
Luminous flux (output) (lm)	4800 lm
Power absorption (total) (W)	30 W
CCT	4000 K
Luminous efficacy (lm/W)	160 lm/W
Unified glare rating UGR (EN 12464-1) (Reflectance coefficient: ceiling 0.7 - walls 0.5)	UGR<19, according to standard EN 12464.
LED flux maintenance	50000 hr, L 90, B 10

MECHANICAL CHARACTERISTICS

Impact resistance rating (IK)	IK06
IP	40



603 - Disanlens UGR<19

Code: 115522-00

MATERIALS AND COLOURS

Housing	in pressed steel sheet, white ABS end caps.
Diffuser	in polycarbonate with an outer micro-prismatic finish to control light distribution.
Colour	White
Equipment	- with cable entry grommet and spacers for ceiling/wall mounting. - With vandal resistant closing mechanism.

EMERGENCY LIGHTING

Emergency power supply type	Not present
-----------------------------	-------------

STANDARDS AND COMPLIANCE

Photobiological safety class	RG0
Markings and tests	CE
Reference standards	EN60598-1. They have a degree of protection according to the EN60529 standard. EN 60598-22-2.
Energy Label	C

GEAR

Sensors	
Upon request	Emergency versions

WARRANTY

After sales warranty	3 yr
----------------------	------

152



55



520-1080-1365



594-1233-1535

DOWNLOAD

MOUNTS

[AssemblyInstructions 603-604 10-24.pdf](#)

DESIGNS


[BIM 603 Disanlens 03-25.zip](#)

[TechnicalDrawing 603-604.dxf](#)



603 - Disanlens UGR<19

Code: 115522-00



2518 Simple suspension