

605 - Disanlens CCT SWITCH

Code: 115561-00



Disanlens CCT Switch is a LED ceiling luminaire designed to offer maximum lighting flexibility in a single product. Thanks to the CCT SWITCH function, it allows easy selection of the desired colour temperature between 3000K, 4000K and 6500K, adapting the light to different needs and environments. Ideal for residential and professional spaces, it ensures uniform illumination, visual comfort and easy installation.



GENERAL INFORMATION

Article	605 - Disanlens CCT SWITCH
Code	115561-00

DIMENSIONS AND WEIGHT

Length (mm)	1190 mm
Width (mm)	72 mm
Height (mm)	60 mm
Weight (Kg)	3.3 kg


ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Min Frequency (Hz)	50 Hz
Max Frequency (Hz)	60 Hz
Frequency (Hz)	50 Hz
Wiring name	CLD
Power factor	≥0.9
Insulation class	Class I
Controllability	Yes (Integrated)
Integrated Function	CCT adjustable with Dip Switch

605 - Disanlens CCT SWITCH

Code: 115561-00

PHOTOMETRIC DATA

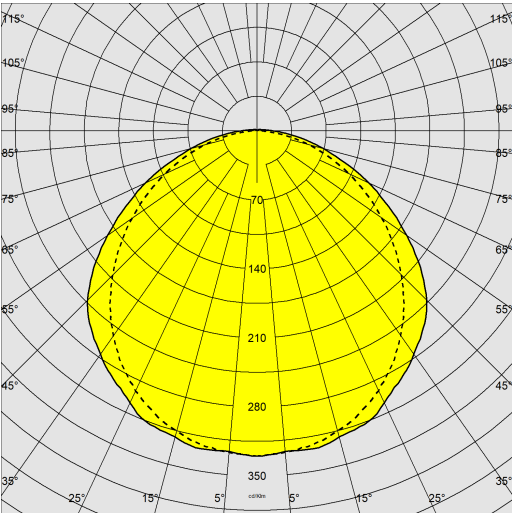

Lighting source	LED
CRI	>80
Luminous flux (output) (lm)	5580 lm
Power absorption (total) (W)	35 W
CCT	4000 K
Luminous efficacy (lm/W)	159 lm/W
LED flux maintenance	50000 hr, L 90, B 10

MECHANICAL CHARACTERISTICS

Impact resistance rating (IK)	IK08
IP	65



605 - Disanlens CCT SWITCH

Code: 115561-00

MATERIALS AND COLOURS

Housing	injection moulded, in grey polycarbonate, vandal resistant, UV stabilized, high mechanical resistance due to the frame reinforced by internal ribbing.
Diffuser	injection moulded, in V2 self-extinguishing polycarbonate, UV stabilized, clear polycarbonate. The external smooth finish facilitates cleaning, essential to maintain maximum lighting efficiency.
Coating	polyester powder coated, UV-stabilised, anti-yellowing, phosphate pre-treatment.
Colour	Grey
Equipment	steel brackets to mount the product as a ceiling fixture or a suspended lamp and with quick connector. The fixture is secured to the brackets with a quick clamping mechanism.

EMERGENCY LIGHTING

Emergency power supply type	Not present
-----------------------------	-------------

STANDARDS AND COMPLIANCE

Photobiological safety class	RG0
Markings and tests	CE
Reference standards	EN60598-1. They have a degree of protection according to the EN60529 standard.
Energy Label	C

WARRANTY

After sales warranty	3 yr
----------------------	------

DOWNLOAD

DESIGNS

TechnicalDrawing 605.dxf

