

6630 - Parigi - suspension-ceiling - direct light - DARK comfort optics - UGR<16

Code: 133071-0041

GENERAL INFORMATION



Parigi is a luminaire designed to meet any linear lighting requirement, especially for straight lines of light. The perfect alignment of the luminaires is maintained through the bracket junction, enabling ALL-LIGHT installations, delivering evenly distributed lighting and great visual comfort. Supplied with brackets for ceiling mount. Suspension installation with included kit (brackets, 1.5m cables, wall plugs, cable clamps)



Article	6630 - Parigi - suspension-ceiling - direct light - DARK comfort optics - UGR<16
Code	133071-0041

DIMENSIONS AND WEIGHT

Length (mm)	1410 mm
Width (mm)	50 mm
Height (mm)	76 mm
Weight (Kg)	2.2 kg


ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Min Frequency (Hz)	50 Hz
Max Frequency (Hz)	60 Hz
Frequency (Hz)	50 Hz
Wiring name	CLD-D-D
Power factor	≥0.92
Insulation class	Class I
Controllability	None

6630 - Parigi - suspension-ceiling - direct light - DARK comfort optics - UGR<16

Code: 133071-0041

PHOTOMETRIC DATA

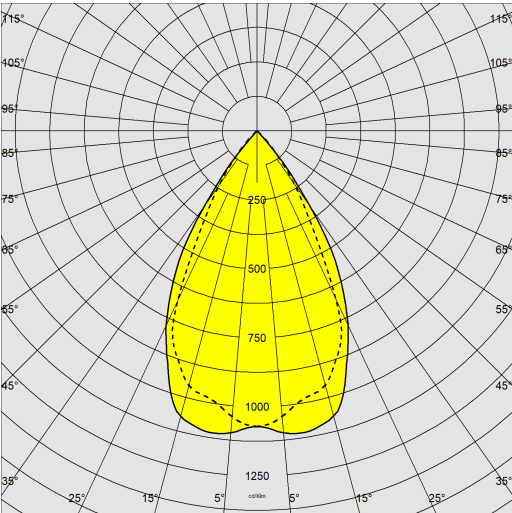

Distribution type	Symmetric medium beam
Lighting source	LED
CRI	>80
Luminous flux (output) (lm)	4180 lm
Power absorption (total) (W)	39 W
CCT	4000 K
Luminous efficacy (lm/W)	107 lm/W
Unified glare rating UGR (EN 12464-1) (Reflectance coefficient: ceiling 0.7 - walls 0.5)	UGR<16
Low Flicker	luminaire with very low flicker: evenly distributed light for greater visual safety.
LED flux maintenance	50000 hr, L 90, B 10

MECHANICAL CHARACTERISTICS

Impact resistance rating (IK)	IK07
IP	20

6630 - Parigi - suspension-ceiling - direct light - DARK comfort optics - UGR<16

Code: 133071-0041

MATERIALS AND COLOURS

Housing	in extruded aluminium with die-cast aluminium end caps.
Coating	epoxy polyester powder coating resistant to UV rays.
Colour	White
Equipment	Supplied with brackets for ceiling mount. Suspension installation with included kit (brackets, 1.5m cables, wall plugs, cable clamps)

EMERGENCY LIGHTING

Emergency power supply type	Not present
-----------------------------	-------------

STANDARDS AND COMPLIANCE


Photobiological safety class	RG0
Markings and tests	CE
Reference standards	EN60598-1. They have a degree of protection according to the EN60529 standard.

GEAR

Sensors	
Upon request	- emergency wiring with centralized power supply CLD EC with sub-code -0050. - black colour.

WARRANTY

After sales warranty	3 yr
----------------------	------

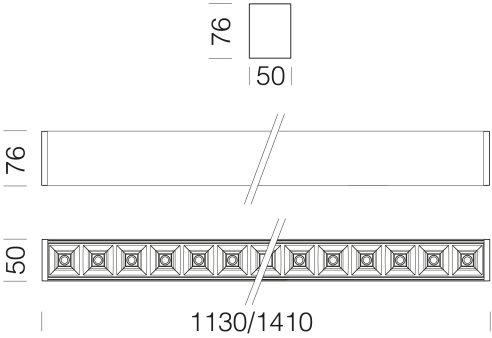

DOWNLOAD

- MOUNTS
- AssemblyInstructions parigi 10-24.pdf
- DESIGNS
- BIM 6630 Parigi 2-24.zip
- TechnicalDrawing parigi.dxf



6630 - Parigi - suspension-ceiling - direct light - DARK comfort optics - UGR<16

Code: 133071-0041

