


Code: 133073-00



Parigi CCT Switch is a versatile and adaptable linear LED system designed with flexibility in mind. Its key feature is the integrated 'colour-changing' selector switch, allowing users to easily select 3000K, 4000K, or 6000K colour temperatures. This simple adjustment ensures that the lighting can be customised to fit the unique needs of any space, making it perfect for areas like public spaces, waiting rooms, and stores. The option to select the colour temperature creates the ideal atmosphere, enhancing both the aesthetics and overall comfort of the space. In addition to its flexibility, Parigi CCT switch delivers high-quality, uniform lighting, while its sleek, linear design fits seamlessly into various environments. For those seeking a lighting solution that is both flexible and customisable, Parigi CCT switch stands out as the ideal choice.



GENERAL INFORMATION

Code	133073-00
------	-----------

DIMENSIONS AND WEIGHT

Length (mm)	1410 mm
Width (mm)	50 mm
Height (mm)	76 mm
Weight (Kg)	2.4 kg


ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Min Frequency (Hz)	50 Hz
Max Frequency (Hz)	60 Hz
Frequency (Hz)	50 Hz
Wiring name	CLD
Power factor	≥0.92
Insulation class	Class I
Controllability	None

6637 -

Code: 133073-00

PHOTOMETRIC DATA

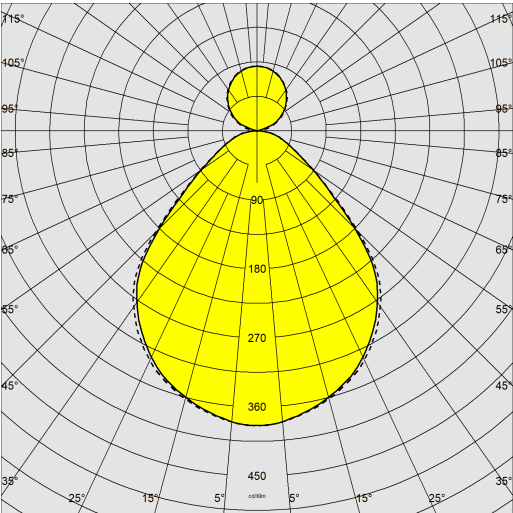

Lighting source	LED
CRI	>80
Luminous flux (output) (lm)	5500 lm
Power absorption (total) (W)	55 W
CCT	4000 K
Luminous efficacy (lm/W)	100 lm/W
Low Flicker	luminaire with very low flicker: evenly distributed light for greater visual safety.
LED flux maintenance	50000 hr, L 90, B 10

MECHANICAL CHARACTERISTICS

Impact resistance rating (IK)	IK07
IP	20

MATERIALS AND COLOURS

Housing	in extruded aluminium with die-cast aluminium end caps.
Coating	epoxy polyester powder coating resistant to UV rays.
Colour	White
Equipment	Supplied with brackets for ceiling mount. Suspension installation with included kit (brackets, 1.5m cables, wall plugs, cable clamps)

EMERGENCY LIGHTING


Emergency power supply type	Not present
-----------------------------	-------------

STANDARDS AND COMPLIANCE

Photobiological safety class	RG0
Markings and tests	CE
Reference standards	EN60598-1. They have a degree of protection according to the EN60529 standard.

WARRANTY

After sales warranty	3 yr
----------------------	------

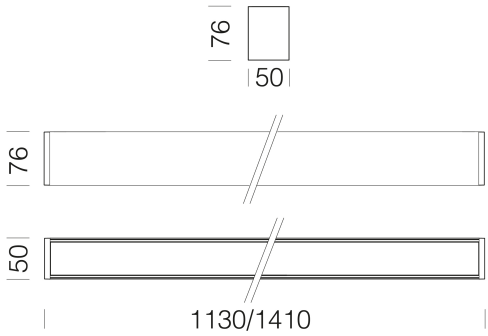

DOWNLOAD

MOUNTS

AssemblyInstructions parigi 10-24.pdf

DESIGNS


TechnicalDrawing 6637.dxf




6637 -

Code	WTot	K - Lumen Output - CRI
133072-xx	48	3000K - 4460lm - CRI>80
133072-xx	48	4000K - 4800lm - CRI>80
133072-xx	48	6000K - 4800lm - CRI>80
133073-xx	55	3000K - 5120lm - CRI>80
133073-xx	55	4000K – 5500lm - CRI>80
133073-xx	55	6000K – 5500lm - CRI>80


Code: 133073-00



2027 Circular joint L



2028 Circular Y joint



2029 Circular joint X