


6634 - Madrid - suspension - direct-indirect light - with opal diffuser

Code: 133097-00

GENERAL INFORMATION

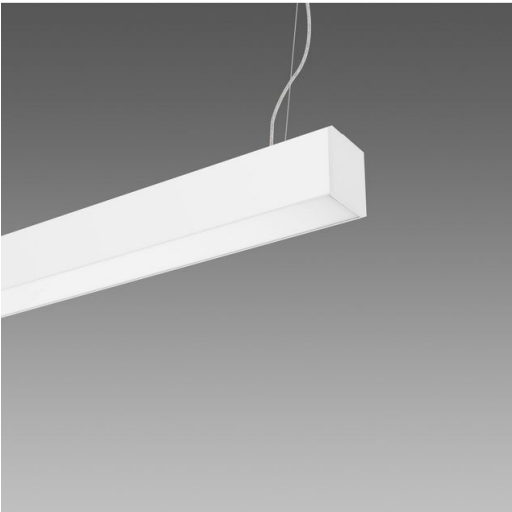

Linear LED fixture, distinguished by the quality of materials and excellent luminous efficiency. The result: extremely high-performance lighting, capable of achieving high color rendering and protecting eye health, ensuring great visual comfort. Madrid is therefore able to meet any type of request, whether functional or design-related.



Article	6634 - Madrid - suspension - direct-indirect light - with opal diffuser
Code	133097-00

DIMENSIONS AND WEIGHT

Length (mm)	1469 mm
Width (mm)	64 mm
Height (mm)	74 mm
Weight (Kg)	2.9 kg


ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Min Frequency (Hz)	50 Hz
Max Frequency (Hz)	60 Hz
Frequency (Hz)	50 Hz
Wiring name	CLD
Power factor	≥0.92
Insulation class	Class I
Controllability	None

6634 - Madrid - suspension - direct-indirect light - with opal diffuser

Code: 133097-00

PHOTOMETRIC DATA

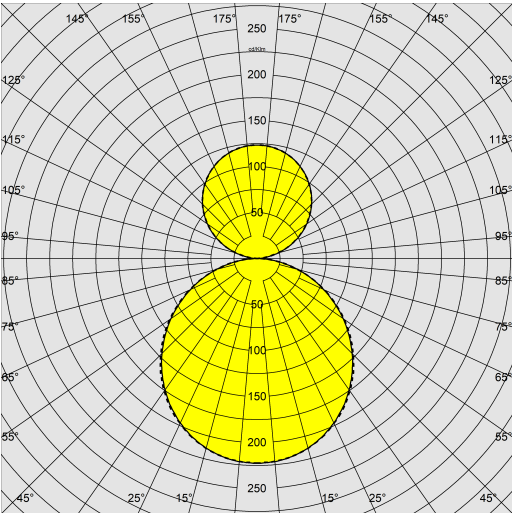

Lighting source	LED
CRI	>80
Luminous flux (output) (lm)	5080 lm
Power absorption (total) (W)	54 W
CCT	4000 K
Luminous efficacy (lm/W)	94 lm/W
Unified glare rating UGR (EN 12464-1) (Reflectance coefficient: ceiling 0.7 - walls 0.5)	UGR<19 versions on project.
Low Flicker	luminaire with very low flicker: evenly distributed light for greater visual safety.
Colour consistency	SDCM4
LED flux maintenance	50000 hr, L 90, B 10

MECHANICAL CHARACTERISTICS

Impact resistance rating (IK)	IK07
IP	40

6634 - Madrid - suspension - direct-indirect light - with opal diffuser

Code: 133097-00

MATERIALS AND COLOURS

Housing	in extruded aluminium.
Diffuser	in opal polycarbonate.
Coating	epoxy polyester powder coating resistant to UV rays.
Colour	White
Luminous flux maintenance 80%: 80.000h (L80B10) o luminous flux maintenance 90%: 50.000h (L90B10).	

EMERGENCY LIGHTING

Emergency power supply type	Not present
-----------------------------	-------------

STANDARDS AND COMPLIANCE

Photobiological safety class	RG0
Markings and tests	CE, ENEC
Reference standards	EN60598-1. They have a degree of protection according to the EN60529 standard.

GEAR

Sensors	
Upon request	- emergency wiring CLD E -07. - emergency wiring with centralized power supply CLD EC -0050. - CLD D-D (DALI) wiring -0041. - version with pass-through wiring for continuous line modules L=2800 max with subcode -0072: supplied without diffuser, which should be purchased separately with acc. 6076, ideal for continuous and uninterrupted "all light" lines. - black colour version

WARRANTY

After sales warranty	5 yr
----------------------	------

DOWNLOAD

MOUNTS

AssemblyInstructions 6085-6086 - 6087.pdf

AssemblyInstructions 6633-6634-6638 susp 04-26.pdf

DESIGNS

BIM 6634 Madrid 5-24.zip

TechnicalDrawing 6634 1.dxf




6634 - Madrid - suspension - direct-indirect light - with opal diffuser


Code: 133097-00




2522 Electrified suspension




6076 Opal diffuser




2518 Simple suspension




6075 Joint bracket



6085 Corner module



6086 "ALL LIGHT" corner module - 4W



6087 Module with SPOT