


754 - Heron - UGR<19

Code: 140213-0041



High light efficiency, UGR<19 glare rating, much lower energy costs and all the advantages granted by the new LED sources are some of the qualities that distinguish Heron, the evolution of the traditional LED ceiling panel. Its special optical design was developed to avoid glare and make any working environment more pleasant, visually safe and comfortable. Moreover, Heron causes no photobiological risk and is also available in the dimmable version.

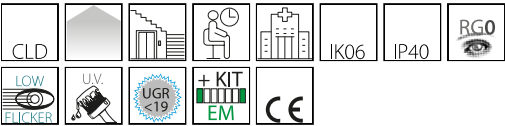

GENERAL INFORMATION

Article	754 - Heron - UGR<19
Code	140213-0041

DIMENSIONS AND WEIGHT

Length (mm)	600 mm
Width (mm)	600 mm
Height (mm)	105 mm
Weight (Kg)	5.7 kg


ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Frequency (Hz)	50 Hz
Wiring name	CLD-D-D
Control interface	DALI
Power factor	≥0.9
Insulation class	Class I
Controllability	Yes (External control)

754 - Heron - UGR<19

Code: 140213-0041

PHOTOMETRIC DATA

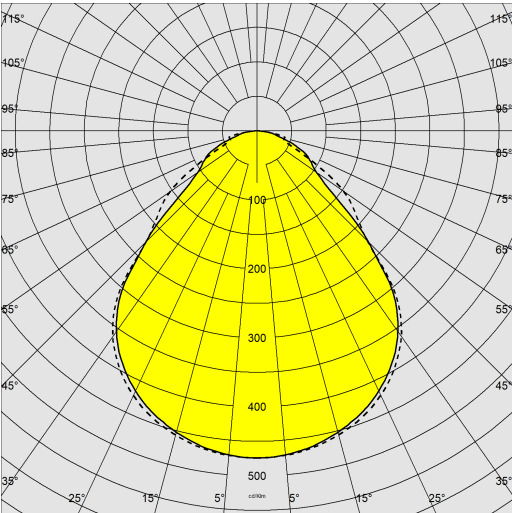

Lighting source	LED
CRI	>80
Luminous flux (output) (lm)	4556 lm
Power absorption (total) (W)	38 W
CCT	4000 K
Luminous efficacy (lm/W)	120 lm/W
Unified glare rating UGR (EN 12464-1) (Reflectance coefficient: ceiling 0.7 - walls 0.5)	UGR<19, according to standard EN 12464.
Low Flicker	luminaire with very low flicker: evenly distributed light for greater visual safety.
LED flux maintenance	50000 hr, L 90, B 10

MECHANICAL CHARACTERISTICS


Impact resistance rating (IK)	IK06
IP	40



754 - Heron - UGR<19

Code: 140213-0041

MATERIALS AND COLOURS

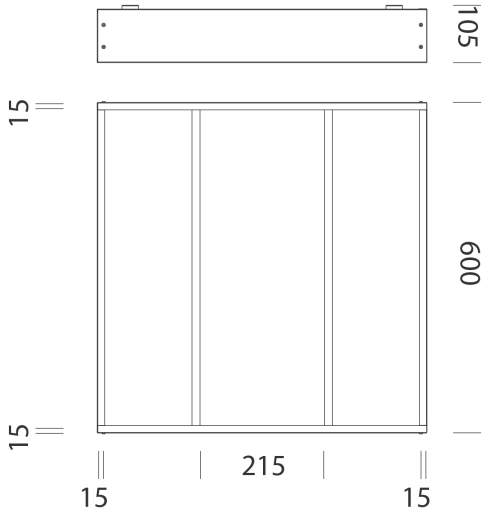

Housing	in pressed steel sheet.
Optics	in white parabolic aluminium.
Diffuser	in high transmittance prismatic technopolymer.
Coating	epoxy polyester powder coating resistant to UV rays.
Colour	White
Luminous flux maintenance 80%: 80.000h (L80B10) o luminous flux maintenance 90%: 50.000h (L90B10).	

EMERGENCY LIGHTING

Emergency power supply type	Not present
-----------------------------	-------------

STANDARDS AND COMPLIANCE

Photobiological safety class	RG0
Markings and tests	CE
Reference standards	EN60598-1. They have a degree of protection according to the EN60529 standard.
Energy Label	C

WARRANTY

After sales warranty	5 yr
----------------------	------

DOWNLOAD

MOUNTS

AssemblyInstructions EM-KIT 600 03-22.pdf

AssemblyInstructions 754 03-23.pdf

DESIGNS

BIM 754 Heron - UGR19 - 20200519.zip

TechnicalDrawing 754c.dxf



754 - Heron - UGR<19

Code: 140213-0041

