


## 833 - Creta - UGR<17

Code: 150240-0041

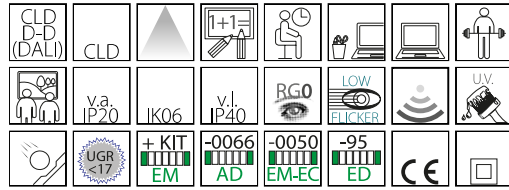

Creta is a new recessed LED ceiling fixture in the backlight version that offers a totally innovative way to enlighten spaces. In addition to producing high brightness and uniform diffused light, it keeps energy consumption extremely low, reaffirming itself as the ideal luminaire for functional and general lighting applications.

It's a luminaire with slim design and lenticular optics ideal in rooms requiring controlled light distribution and maximum visual comfort (UGR<17).



### GENERAL INFORMATION

Article	833 - Creta - UGR<17
Code	150240-0041

### DIMENSIONS AND WEIGHT

Length (mm)	595 mm
Width (mm)	595 mm
Height (mm)	39 mm
Weight (Kg)	1.7 kg

### INSTALLATION

Recessed dimensions - Length (mm)	590 mm
Recessed dimensions - Width (mm)	590 mm


### ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Min Frequency (Hz)	50 Hz
Max Frequency (Hz)	60 Hz
Frequency (Hz)	50 Hz
Wiring name	CLD-D-D
Wiring	quick, no need to open the fixture.
Control interface	DALI
Power factor	≥0.95
Insulation class	Class II
Controllability	Yes (External control)

## 833 - Creta - UGR<17

Code: 150240-0041

### PHOTOMETRIC DATA

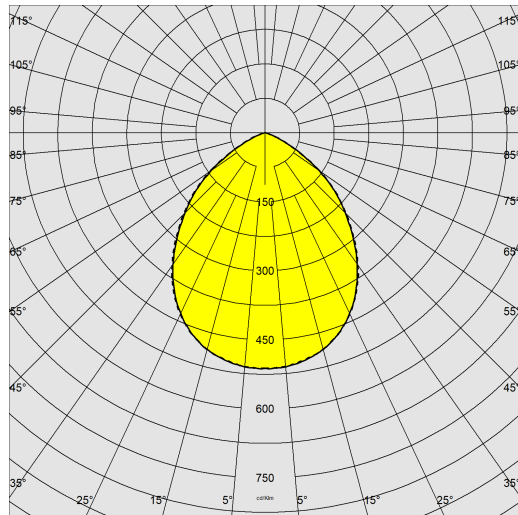

Lighting source	LED
CRI	80
Luminous flux (output) (lm)	3724 lm
Power absorption (total) (W)	30 W
CCT	4000 K
Luminous efficacy (lm/W)	124 lm/W
Unified glare rating UGR (EN 12464-1) (Reflectance coefficient: ceiling 0.7 - walls 0.5)	UGR<17, according to standard EN 12464.
Low Flicker	luminaire with very low flicker: evenly distributed light for greater visual safety.
Colour consistency	SDCM3
LED flux maintenance	50000 hr, L 80, B 20



### MECHANICAL CHARACTERISTICS

Impact resistance rating (IK)	IK06
IP (vl)	40
IP (va)	20

## 833 - Creta - UGR<17

Code: 150240-0041

### MATERIALS AND COLOURS


Housing	body in steel sheet and frame in aluminium.
Optics	secondary lenses in high-performance and anti-yellowing PMMA.
Colour	White
Equipment	Ceiling lighting fixture with external driver; it can be easily housed in false ceilings.

### STANDARDS AND COMPLIANCE

Photobiological safety class	RG0
Markings and tests	CE
Reference standards	EN60598-1. They have a degree of protection according to the EN60529 standard.
Energy Label	E

### WARRANTY

After sales warranty	5 yr
----------------------	------

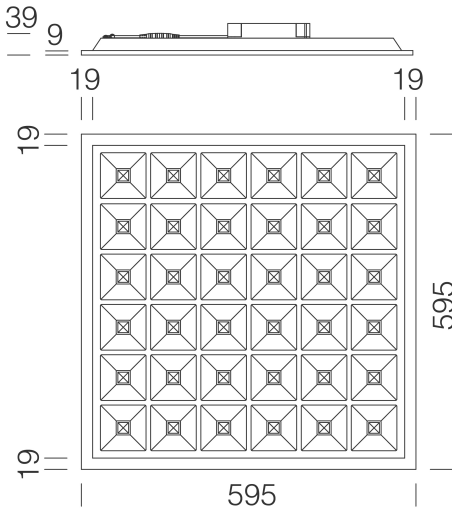

### DOWNLOAD

#### MOUNTS

[AssemblyInstructions EM-KIT 600 03-22.pdf](#)

[AssemblyInstructions 833 03-23.pdf](#)

#### DESIGNS


[BIM 833 Creta UGR 17 10-24.zip](#)

[TechnicalDrawing 833.dxf](#)




## 833 - Creta - UGR<17


Code: 150240-0041




600 EM power supply kit



595 Frame 600x600 h 70 mm



320 Cord



907 Springs