


834 - Rodi HE - UGR<19 - DALI

Code: 150252-0041

GENERAL INFORMATION

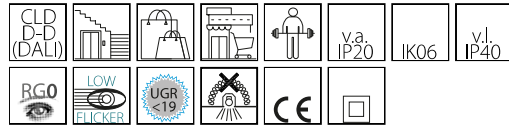

Article	834 - Rodi HE - UGR<19 - DALI
Code	150252-0041

DIMENSIONS AND WEIGHT


Length (mm)	595 mm
Width (mm)	595 mm
Height (mm)	34 mm
Weight (Kg)	1.3 kg

INSTALLATION

Recessed dimensions - Length (mm)	590 mm
Recessed dimensions - Width (mm)	590 mm

ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Min Frequency (Hz)	50 Hz
Max Frequency (Hz)	60 Hz
Frequency (Hz)	50 Hz
Wiring name	CLD-D-D
Wiring	quick, no need to open the fixture.
Control interface	DALI
Power factor	≥0.95
Insulation class	Class II
Controllability	Yes (External control)

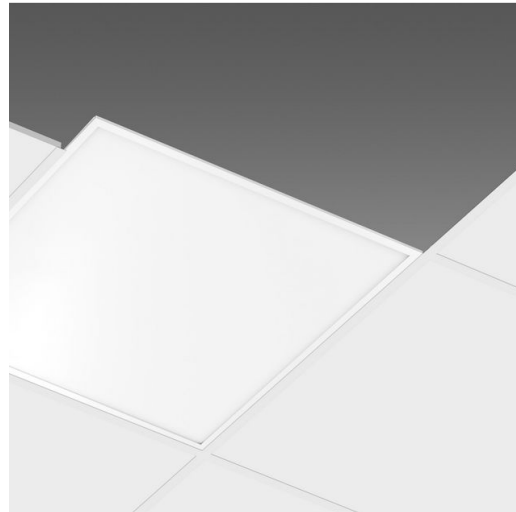


Rodi is a new recessed LED ceiling fixture in the backlight version that offers a totally innovative way to light up spaces. With a very slim shape and energy-efficient LEDs, Rodi produces bright, diffused light, and keeps energy consumption extremely low, reaffirming itself as the ideal luminaire for functional and general lighting applications.



834 - Rodi HE - UGR<19 - DALI

Code: 150252-0041

PHOTOMETRIC DATA

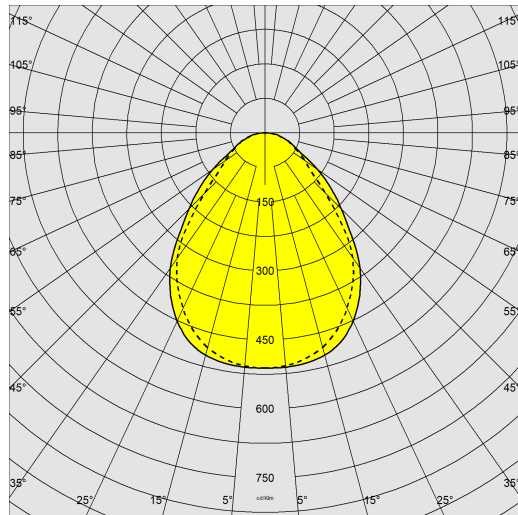


Lighting source	LEDS
CRI	>80
Luminous flux (output) (lm)	3700 lm
Power absorption (total) (W)	23 W
CCT	4000 K
Luminous efficacy (lm/W)	161 lm/W
Unified glare rating UGR (EN 12464-1) (Reflectance coefficient: ceiling 0.7 - walls 0.5)	UGR<19, according to standard EN 12464.
Low Flicker	luminaire with very low flicker: evenly distributed light for greater visual safety.
Colour consistency	SDCM3
LED flux maintenance	80000 hr, L 90, B 10

MECHANICAL CHARACTERISTICS

Impact resistance rating (IK)	IK06
IP (vl)	40
IP (va)	20

834 - Rodi HE - UGR<19 - DALI

Code: 150252-0041

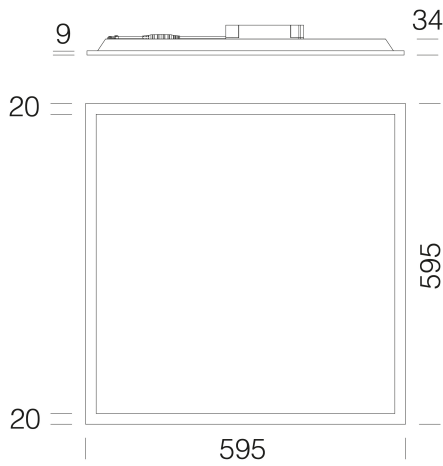

DOWNLOAD

MOUNTS

[AssemblyInstructions Rodi 01-25.pdf](#)

DESIGNS

[TechnicalDrawing 834.dxf](#)



MATERIALS AND COLOURS

Housing	body in steel sheet and frame in aluminium.
Diffuser	in high transmittance prismatic technopolymer.
Colour	White
Equipment	Ceiling lighting fixture with external driver; it can be easily housed in false ceilings.

EMERGENCY LIGHTING

Emergency power supply type	Not present
-----------------------------	-------------

STANDARDS AND COMPLIANCE


Photobiological safety class	RG0
Markings and tests	CE
Reference standards	EN60598-1. They have a degree of protection according to the EN60529 standard.
Energy Label	C

WARRANTY


After sales warranty	5 yr
----------------------	------

834 - Rodi HE - UGR<19 - DALI


Code: 150252-0041



907 Springs




595 Frame 600x600 h 70 mm



320 Cord



2520 Simple suspension



600 EM power supply kit