


843 - Ermetica LED IP65 - for aseptic environments

Code: 152081-00



LED lighting fixture for sterile and aseptic environments that can be installed in visible and concealed false ceilings and with plasterboard or aluminium ceiling panels ('N'), plasterboard ceilings ('S') and inspectionable false ceilings in general. Ceiling fixture in steel with anti-glare dark light optics. High degree of protection, excellent colour rendering and very low flickering.

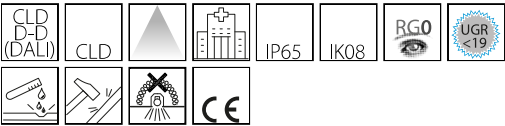

GENERAL INFORMATION

Article	843 - Ermetica LED IP65 - for aseptic environments
Code	152081-00

DIMENSIONS AND WEIGHT

Length (mm)	1196 mm
Width (mm)	330 mm
Height (mm)	90 mm
Weight (Kg)	10.6 kg

INSTALLATION

Recessed dimensions - Length (mm)	1180 mm
Recessed dimensions - Width (mm)	280 mm


ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Min Frequency (Hz)	50 Hz
Max Frequency (Hz)	60 Hz
Frequency (Hz)	50 Hz
Wiring name	CLD
Power factor	≥0.9
Insulation class	Class I
Controllability	None

843 - Ermetica LED IP65 - for aseptic environments

Code: 152081-00

PHOTOMETRIC DATA

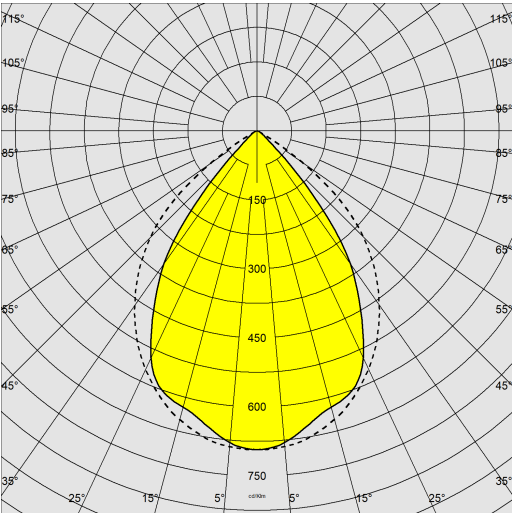

Lighting source	LED
CRI	90
Luminous flux (output) (lm)	4420 lm
Power absorption (total) (W)	44 W
CCT	4000 K
Luminous efficacy (lm/W)	100 lm/W
Unified glare rating UGR (EN 12464-1) (Reflectance coefficient: ceiling 0.7 - walls 0.5)	UGR<19, according to standard EN 12464.
Low Flicker	luminaire with very low flicker: evenly distributed light for greater visual safety.
LED flux maintenance	50000 hr, L 90, B 10


MECHANICAL CHARACTERISTICS

Impact resistance rating (IK)	IK08
IP	65



843 - Ermetica LED IP65 - for aseptic environments

Code: 152081-00

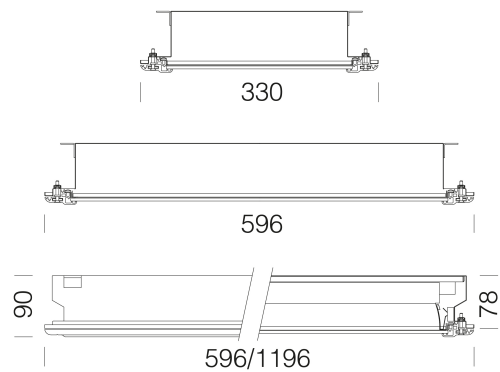

DOWNLOAD

MOUNTS

AssemblyInstructions ermetica 08-22.pdf

DESIGNS

BIM 843 Ermetica IP65 LED 04-25.zip

TechnicalDrawing ermetica-24.dxf



MATERIALS AND COLOURS

Housing	in pressed steel sheet with frame in anodised extruded aluminium.
Optics	dark light double parabolic louvers, longitudinal and transverse, in matt anodised aluminium, 2μ thick, low luminance.
Diffuser	tempered glass, 4 mm thick, resistant to thermal shock and impact (UNI EN 12150-1:2001).
Coating	polyester powder, UV stabilized for aseptic environments.
Colour	Anodised
Equipment	with frame and gasket.

EMERGENCY LIGHTING

Emergency power supply type	Not present
-----------------------------	-------------

STANDARDS AND COMPLIANCE

Photobiological safety class	RG0
Markings and tests	CE
Reference standards	EN60598-1. They have a degree of protection according to the EN60529 standard.
Energy Label	B

WARRANTY

After sales warranty	5 yr
----------------------	------