


781 - Compact - with SENSOR

Code: 156301-19

GENERAL INFORMATION

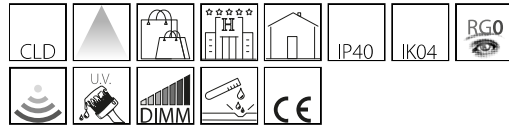

Article	781 - Compact - with SENSOR
Code	156301-19

DIMENSIONS AND WEIGHT

Height (mm)	165 mm
Diameter (Ø) (mm)	293 mm
Weight (Kg)	2.685 kg

ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Min Frequency (Hz)	50 Hz
Max Frequency (Hz)	60 Hz
Frequency (Hz)	50 Hz
Wiring name	CLD-D
Control interface	0-10V
Power factor	>0.9
Insulation class	Class I
Controllability	Yes (Integrated)
Sensor technology	Radar presence sensor
Integrated Function	Movement, Presence




781 Compact - con SENSORE



781 - Compact - with SENSOR

Code: 156301-19

PHOTOMETRIC DATA

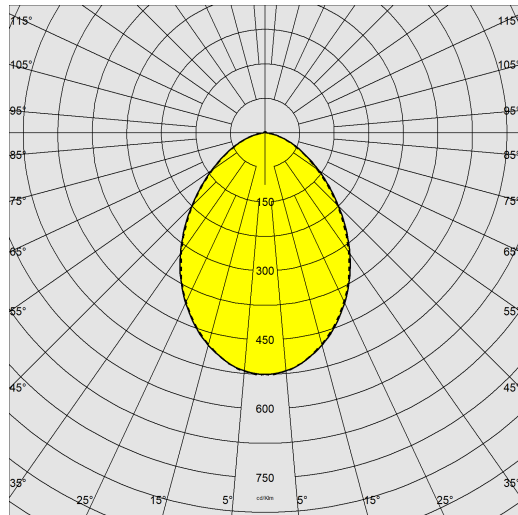

Lighting source	LED
CRI	≥80
Luminous flux (output) (lm)	1262 lm
Power absorption (total) (W)	21 W
CCT	4000 K
Luminous efficacy (lm/W)	60 lm/W
Low Flicker	luminaire with very low flicker: evenly distributed light for greater visual safety.
LED flux maintenance	50000 hr, L 70, B 50

MECHANICAL CHARACTERISTICS


Impact resistance rating (IK)	IK04
IP	40



781 - Compact - with SENSOR


Code: 156301-19

MATERIALS AND COLOURS



Housing	lathe-turned steel.
Diffuser	matt glass, resistant to thermal shock and impact (UNI EN 12150-1:2001).
Coating	polyester powder coated, UV-stabilised, anti-yellowing, phosphate pre-treatment.
Colour	White
Equipment	finishing ring with fall-proof spring.

STANDARDS AND COMPLIANCE



Photobiological safety class	RG0
Markings and tests	CE
Reference standards	EN60598-1. With degree of protection according to EN60529.
Energy Label	D

WARRANTY

After sales warranty	3 yr
----------------------	------

DOWNLOAD

MOUNTS

[AssemblyInstructions 781 03-23.pdf](#)

DESIGNS

[TechnicalDrawing 784.dxf](#)

