


## 884 - Compact CRI95 - DIP SWITCH

Code: 156427-00

### GENERAL INFORMATION

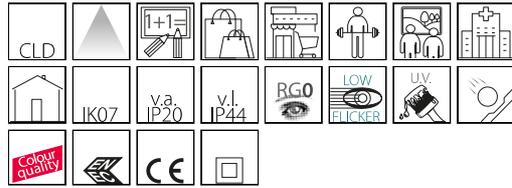

Article	884 - Compact CRI95 - DIP SWITCH
Code	156427-00

### DIMENSIONS AND WEIGHT

Height (mm)	58 mm
Diameter (Ø) (mm)	245 mm
Weight (Kg)	0.566 kg

### INSTALLATION

Recessed dimensions - Length (mm)	200 mm
Recessed dimensions - Width (mm)	240 mm

### ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage (V)	230 V
Frequency (Hz)	50 Hz
Wiring	CLD
Power factor	≥0.92
Insulation class	Class II
Controllability	None



The lighting of passage areas (stairwells, corridors, entrances) and workstations (public buildings, offices, hotels and restaurants) is very important in both easthetic and functional terms. Moreover, well-lit public and residential areas contribute to providing a sense of security and wellbeing.

The robust and high-quality Compact recessed spotlights by Disano are the best solution, as they can be easily inserted into any setting while guaranteeing maximum efficiency and long service life.

Disano's Compact spotlight now also includes the Compact Dark version, specifically designed for workplaces, now features glare-free metallised aluminium optics and the latest generation of high-efficiency LEDs.


In addition to the excellent quality of the LED light, featuring an extraordinary colour rendering index, Health spotlights are also certified as being low flicker, indicating a stable light output producing minimum flicker levels.



## 884 - Compact CRI95 - DIP SWITCH

Code: 156427-00

### PHOTOMETRIC DATA

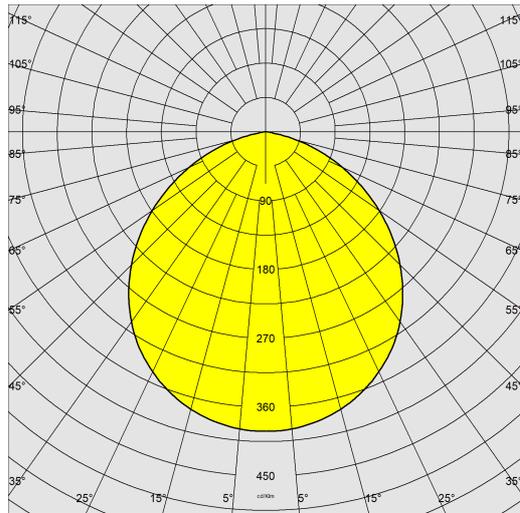

Lighting source	LED
CRI	95
Luminous flux (output) (lm)	3665 lm
Power absorption (total) (W)	29 W
CCT	4000 K
Low Flicker	luminaire with very low flicker: evenly distributed light for greater visual safety.
LED flux maintenance	55000 hr, L 80, B 20

### MECHANICAL CHARACTERISTICS

Impact resistance rating (IK)	IK07
IP (vl)	44
IP (va)	20



## 884 - Compact CRI95 - DIP SWITCH

Code: 156427-00

### MATERIALS AND COLOURS


Housing	in die-cast aluminium.
Diffuser	thermoplastic material resistant to high temperatures.
Heat sink	built-in.
Coating	polyester powder coated, UV-stabilised, anti-yellowing, phosphate pre-treatment.
Colour	White
Equipment	with adjustable steel bracket.

### STANDARDS AND COMPLIANCE

Photobiological safety class	RG0
Markings and tests	CE, ENEC
Reference standards	EN60598-1. With degree of protection according to EN60529. Minimum Environmental Criteria (CAM) compliant product.
Energy Label	D

### WARRANTY

After sales warranty	5 yr
----------------------	------

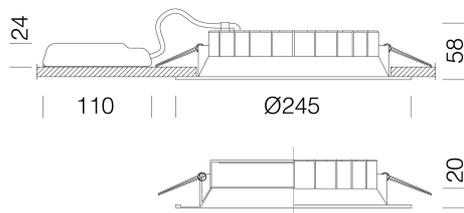

### DOWNLOAD

#### MOUNTS

[AssemblyInstructions compact 01-22.pdf](#)

#### DESIGNS

[BIM 884 Compact CRI95 - 245mm - 20200214.zip](#)

[TechnicalDrawing 884.dxf](#)



## 884 - Compact CRI95 - DIP SWITCH

Code	Wiring	LED	WTot	K - Lumen Output - CRI
156424-00	CLD	400	14	4000K - 1926lm - CRI 95
156424-00	CLD	500	18	4000K - 2385lm - CRI 95
156424-00	CLD	525	19	4000K - 2503lm - CRI 95
156424-00	CLD	550	20	4000K - 2626lm - CRI 95
156424-00	CLD	600	22	4000K - 2884lm - CRI 95
156424-00	CLD	700	25	4000K - 3342lm - CRI 95
156424-00	CLD	725	26	4000K - 3461lm - CRI 95
156424-39	CLD	400	14	3000K - 1854lm - CRI 95
156424-39	CLD	500	18	3000K - 2266lm - CRI 95
156424-39	CLD	525	19	3000K - 2379lm - CRI 95
156424-39	CLD	550	20	3000K - 2503lm - CRI 95
156424-39	CLD	600	22	3000K - 2729lm - CRI 95
156424-39	CLD	700	25	3000K - 3175lm - CRI 95
156424-39	CLD	725	26	3000K - 3289lm - CRI 95
156425-00	CLD	700	13	4000K - 3342lm - CRI 95
156425-00	CLD	750	14	4000K - 3538lm - CRI 95
156425-00	CLD	800	19	4000K - 3775lm - CRI 95
156425-39	CLD	700	13	3000K - 3175lm - CRI 95
156425-39	CLD	750	14	3000K - 3362lm - CRI 95
156425-39	CLD	800	19	3000K - 3586lm - CRI 95

## 884 - Compact CRI95 - DIP SWITCH

---

Code: 156427-00

