


886 - Compact - CCT SWITCH

Code: 156465-00



The main feature of this luminaire is the “colour-changing” technology: with the built-in selector switch positioned on the fixture’s body, you can choose the desired colour temperature (3000K/3137lm - 3500K/3233lm - 4000K/3235lm), adjusting its emission to most lighting installations.

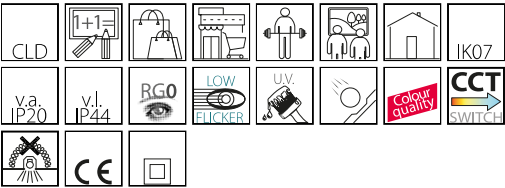

GENERAL INFORMATION

Article	886 - Compact - CCT SWITCH
Code	156465-00

DIMENSIONS AND WEIGHT

Height (mm)	58 mm
Diameter (Ø) (mm)	245 mm
Weight (Kg)	0.7 kg

INSTALLATION

Min. recessed cut-out hole (mm)	220 mm
Max. recessed cut-out hole (mm)	240 mm


ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Min Frequency (Hz)	50 Hz
Max Frequency (Hz)	60 Hz
Frequency (Hz)	50 Hz
Wiring name	CLD
Power factor	≥0.92
Insulation class	Class II
Controllability	Yes (Integrated)
Integrated Function	CCT adjustable with Dip Switch

886 - Compact - CCT SWITCH

Code: 156465-00

PHOTOMETRIC DATA

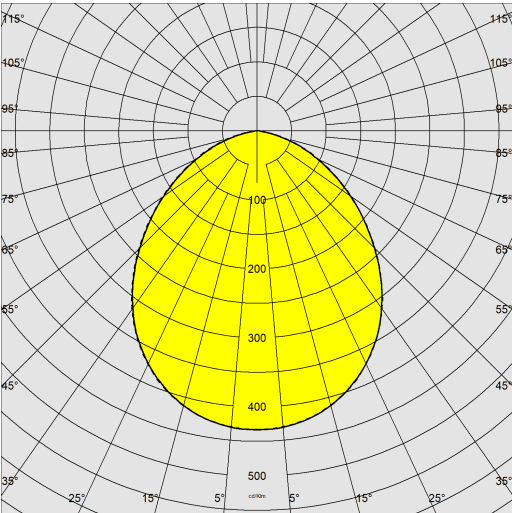


Lighting source	LED
CRI	>90
Luminous flux (output) (lm)	3137 lm
Power absorption (total) (W)	25 W
CCT	3000 K
Luminous efficacy (lm/W)	125 lm/W
Low Flicker	luminaire with very low flicker: evenly distributed light for greater visual safety.
LED flux maintenance	50000 hr, L 90, B 10

MECHANICAL CHARACTERISTICS

Impact resistance rating (IK)	IK07
IP (vl)	44
IP (va)	20

886 - Compact - CCT SWITCH

Code: 156465-00

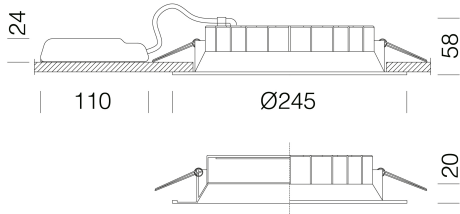

DOWNLOAD

- MOUNTS
- AssemblyInstructions CCT COMPACT rev1.pdf
- DESIGNS
- TechnicalDrawing 884.dxf



MATERIALS AND COLOURS

Housing	in die-cast aluminium.
Diffuser	thermoplastic material resistant to high temperatures.
Heat sink	built-in.
Coating	polyester powder coated, UV-stabilised, anti-yellowing, phosphate pre-treatment.
Colour	White
Equipment	with adjustable steel bracket.

EMERGENCY LIGHTING

Emergency power supply type	Not present
-----------------------------	-------------

STANDARDS AND COMPLIANCE

Photobiological safety class	RG0
Markings and tests	CE
Reference standards	EN60598-1. With degree of protection according to EN60529. Minimum Environmental Criteria (CAM) compliant product.

WARRANTY

After sales warranty	5 yr
----------------------	------

886 - Compact - CCT SWITCH

Code: 156465-00



590 Adapters for springs