

Code: 162456-00



Article	995 - Forma - acid-etched glass
Code	162456-00

Length (mm)	1600 mm
Width (mm)	200 mm
Height (mm)	110 mm
Weight (Kg)	9.2 kg


Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Min Frequency (Hz)	50 Hz
Max Frequency (Hz)	60 Hz
Frequency (Hz)	50 Hz
Wiring name	CLD
Power factor	≥0.9
Insulation class	Class I
Controllability	None



995 - Forma - acid-etched glass

Code: 162456-00

PHOTOMETRIC DATA

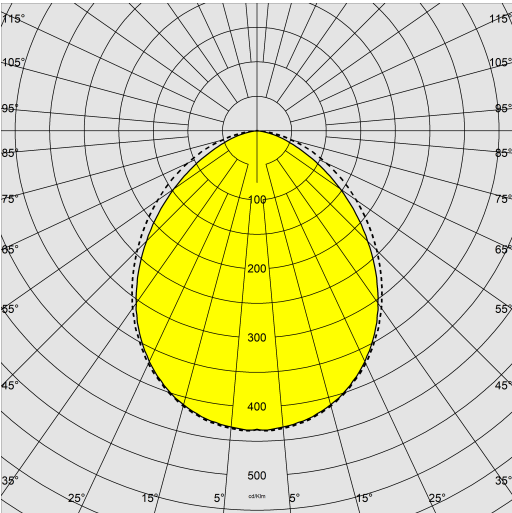


Lighting source	LED
CRI	>80
Luminous flux (output) (lm)	10899 lm
Power absorption (total) (W)	67 W
CCT	4000 K
Luminous efficacy (lm/W)	163 lm/W
Low Flicker	luminaire with very low flicker: evenly distributed light for greater visual safety.
LED flux maintenance	80000 hr, L 90, B 10

MECHANICAL CHARACTERISTICS

Impact resistance rating (IK)	IK10
IP	66
Ambient temperature - min	-25 °C
Ambient temperature - max	40 °C

995 - Forma - acid-etched glass

Code: 162456-00

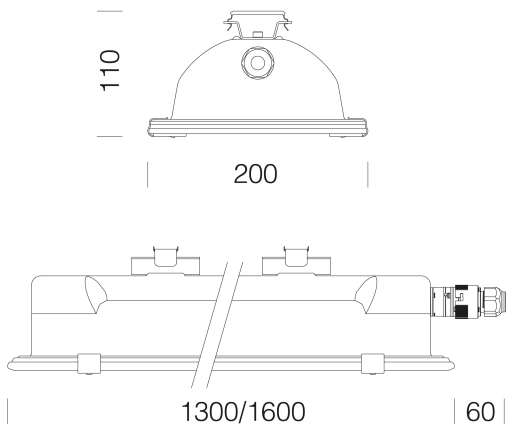

DOWNLOAD

MOUNTS

AssemblyInstructions 993-995-997-976-977 07-24.pdf

DESIGNS

BIM 995 Forma - 03-34.zip

TechnicalDrawing forma 26.dxf



MATERIALS AND COLOURS

Housing	made of pressed steel, drawn in a single piece for high mechanical resistance.
Optics	galvanised steel pre-painted in oven with white polyester resin, UV-stabilised. Fastened to the body with a quick coupling by means of a device machined directly on the body.
Diffuser	acid-etched tempered glass, 5 mm thick, resistant to impact.
Coating	the fully automated powder-coating cycle involves a polyester-based, salt-spray corrosion-resistant and UV-stabilised paint.
Colour	Grey
Equipment	complete with silicone rubber gasket, waterproof connector for quick installation and locking system with spring clips; stainless steel bracket that allows easy and safe installation of the lighting fixture onto the ceiling/wall and spring loop that allows quick connection to any suspension system.

EMERGENCY LIGHTING

Emergency power supply type	Not present
-----------------------------	-------------

STANDARDS AND COMPLIANCE

Photobiological safety class	RG0
Markings and tests	CE
Reference standards	EN 60598-1. They have a degree of protection in accordance with the EN 60529 standard. Ideal for installations with direct exposure to sunlight. The 'D' brand ceiling light is recommended for installation in environments with suspended dust or settled dust.
Energy Label	B

GEAR


Sensors	
Upon request	- Version complete with adjustable bracket (to purchase with sub-code -0074). - CLD-EC wiring for centrally powered emergency lighting, subcode -0050 - EM version of the ceiling light with an external watertight box, subcode -07.

WARRANTY

After sales warranty	5 yr
----------------------	------

995 - Forma - acid-etched glass

Code: 162456-00



975 Anti-impact grid