


971 - Ottima - High Performance

Code: 164771-07

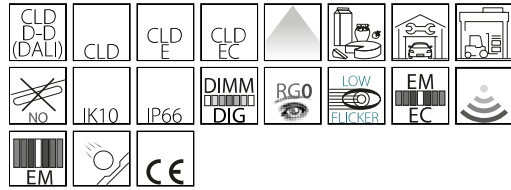

True energy savings can only be achieved with quality lighting. This is why Disano has developed Ottima LED, the high-efficiency watertight fixture that allows you to improve the quality of light while reducing consumption.

Disano's extensive industrial and commercial experience has led to the creation of a product that offers the perfect solution for relamping existing systems: in a single 1500mm length, Ottima LED can replace old 58W lamps.

Ottima LED stands out from similar products for the quality of the materials and the accuracy with which it is designed to achieve special lighting effects.

The diffuser is made from the best quality polycarbonate, UV-stabilised, with a high coefficient of light transmission and diffusion, without decreasing performance. The special grooving of the diffuser achieves an all-light effect that eliminates glare, diffusing light completely perfectly.

Ottima LED is designed to make installation as easy as possible, with standard steel brackets for easy and secure attachment to ceilings or walls (with the possibility of adjusting the installation spacing). In addition, the standard spring hook allows for quick attachment to any chain suspension system.

Ottima LED can be equipped with control systems, such as presence detector radar, which optimises consumption, turning on the lights only when necessary.

It is a watertight fixture with careful attention to the smallest details in terms of technology, but which also knows how to present itself as an object of design, thanks to a clean and essential shape, in authentic Made-in-Italy style.



GENERAL INFORMATION

| | |
|---------|---------------------------------|
| Article | 971 - Ottima - High Performance |
| Code | 164771-07 |

DIMENSIONS AND WEIGHT

| | |
|-------------|---------|
| Length (mm) | 1506 mm |
| Width (mm) | 105 mm |
| Height (mm) | 80 mm |
| Weight (Kg) | 2.5 kg |


ELECTRICAL CHARACTERISTICS AND CONTROLS

| | |
|--------------------|---------|
| Voltage type | AC |
| Min Voltage (V) | 220 V |
| Max Voltage (V) | 240 V |
| Min Frequency (Hz) | 50 Hz |
| Max Frequency (Hz) | 60 Hz |
| Frequency (Hz) | 50 Hz |
| Wiring name | CLD-E |
| Power factor | ≥0.9 |
| Insulation class | Class I |
| Controllability | None |

971 - Ottima - High Performance

Code: 164771-07

PHOTOMETRIC DATA

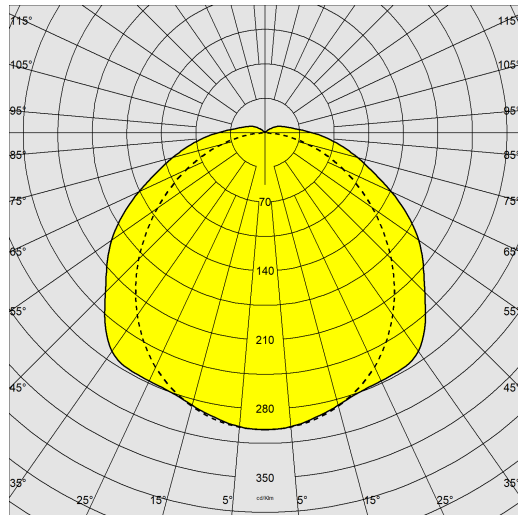

| | |
|------------------------------|--|
| Distribution type | Symmetric wide beam |
| Lighting source | LED |
| CRI | ≥80 |
| Luminous flux (output) (lm) | 7700 lm |
| Power absorption (total) (W) | 42 W |
| CCT | 4000 K |
| Luminous efficacy (lm/W) | 183 lm/W |
| Low Flicker | luminaire with very low flicker: evenly distributed light for greater visual safety. |
| LED flux maintenance | 100000 hr, L 90, B 10 |


MECHANICAL CHARACTERISTICS

| | |
|-------------------------------|-------|
| Impact resistance rating (IK) | IK10 |
| IP | 66 |
| Ambient temperature - min | 5 °C |
| Ambient temperature - max | 40 °C |

971 - Ottima - High Performance

Code: 164771-07

MATERIALS AND COLOURS

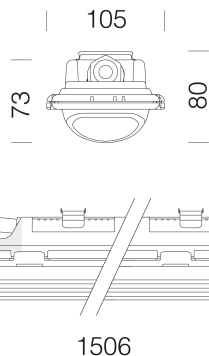

DOWNLOAD

MOUNTS

[AssemblyInstructions ottima 02-24.pdf](#)

DESIGNS

[BIM 971 Ottima 02-24](#)

[TechnicalDrawing ottimaj.dxf](#)



| | |
|-----------|--|
| Housing | injection-moulded, made of grey RAL 7035 polycarbonate, shatterproof, UV-stabilised, with high mechanical strength thanks to the structure reinforced by internal ribs. |
| Optics | galvanised steel pre-painted in oven with white polyester resin, UV-stabilised. Fastened to the body with a quick coupling by means of a device machined directly on the body. |
| Diffuser | injection-moulded in polycarbonate with internal grooves for greater light control, self-extinguishing V2, UV-stabilised, smooth outer finish to enable easy cleaning for maximum light efficiency. |
| Colour | Grey |
| Equipment | <ul style="list-style-type: none"> - sealing gasket in eco-friendly, anti-aging expanded polyurethane foam - ceiling mounting brackets and suspension hook in stainless steel - quick connector - clamp and safety screws in stainless steel |

ATTENTION !

Do not install on surfaces subject to strong vibrations, outdoors on hanging cables, or on walls under metallic grates, or on poles, and in any case, never expose the fixture to direct sunlight.

Check the compatibility between the material constituting the product and the space where it will be installed.

We recommend the use of fixtures made of steel with direct exposure to sunlight.

EMERGENCY LIGHTING

| | |
|--------------------------|------|
| Type of emergency | S.A. |
| Emergency operation time | 1h |

STANDARDS AND COMPLIANCE

| | |
|------------------------------|--|
| Photobiological safety class | RG0 |
| Markings and tests | CE |
| Reference standards | EN60598-1. With degree of protection according to EN60529. The lighting fixture meets all IFS and BRC requirements, and the regulation of the HACCP Directive regarding lighting systems installed in food processing plants. |
| Laboratory Tests | <ul style="list-style-type: none"> - the UL 94 Standard is considered a reference for rating the ignition characteristics of plastic materials. The watertight fixtures are made of V2 class material that self-extinguishes in 25 seconds. - passes the Glow Wire Test at 850 °C. |
| Energy Label | C |

GEAR


| | |
|--------------|--|
| Upon request | <ul style="list-style-type: none"> - radar sensor for ON-OFF watertight fixtures, subcode -19 - wiring through continuous row, subcode -0072 - wiring for centrally powered emergency lighting, subcode -0050 - 1-10V dimmer + emergency wiring, subcode -94 |
|--------------|--|

WARRANTY


| | |
|----------------------|------|
| After sales warranty | 7 yr |
|----------------------|------|

971 - Ottima - High Performance


Code: 164771-07



978 Wall bracket



975 Anti-impact grid



6036 Universal connection