

Code: 164787-07



It is a watertight fixture with careful attention to the smallest details in terms of technology, but which also knows how to present itself as an object of design, thanks to a clean and essential shape, in authentic Made-in-Italy style.



GENERAL INFORMATION

Article	974 - Ottima - Energy Saving
Code	164787-07

DIMENSIONS AND WEIGHT

Length (mm)	1506 mm
Width (mm)	105 mm
Height (mm)	80 mm
Weight (Kg)	2.6 kg

ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Min Frequency (Hz)	50 Hz
Max Frequency (Hz)	60 Hz
Frequency (Hz)	50 Hz
Wiring name	CLD-E
Power factor	≥0.9
Insulation class	Class I
Controllability	None

974 - Ottima - Energy Saving

Code: 164787-07

PHOTOMETRIC DATA



Distribution type	Symmetric wide beam
Lighting source	LED
CRI	≥80
Luminous flux (output) (lm)	9100 lm
Power absorption (total) (W)	59 W
CCT	4000 K
Luminous efficacy (lm/W)	154 lm/W
Low Flicker	luminaire with very low flicker: evenly distributed light for greater visual safety.
Colour consistency	SDCM3
LED flux maintenance	100000 hr, L 90, B 10

MECHANICAL CHARACTERISTICS


Impact resistance rating (IK)	IK10
IP	66
Ambient temperature - min	5 °C
Ambient temperature - max	40 °C



974 - Ottima - Energy Saving

Code: 164787-07

MATERIALS AND COLOURS

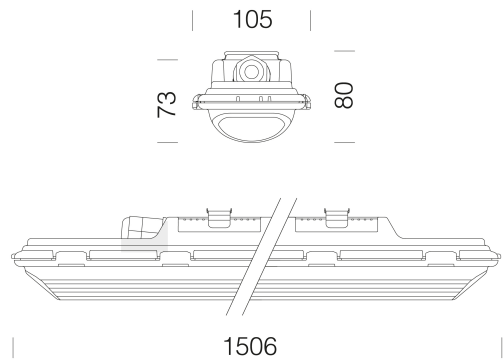

DOWNLOAD

MOUNTS

AssemblyInstructions ottima 02-24.pdf

DESIGNS

BIM 974 Ottima 02-24.zip

TechnicalDrawing ottimaj.dxf



Housing	injection-moulded, made of grey RAL 7035 polycarbonate, shatterproof, UV-stabilised, with high mechanical strength thanks to the structure reinforced by internal ribs.
Optics	galvanised steel pre-painted in oven with white polyester resin, UV-stabilised. Fastened to the body with a quick coupling by means of a device machined directly on the body.
Diffuser	injection-moulded in polycarbonate with internal grooves for greater light control, self-extinguishing V2, UV-stabilised, smooth outer finish to enable easy cleaning for maximum light efficiency.
Colour	Grey
Equipment	- sealing gasket in eco-friendly, anti-aging expanded polyurethane foam - ceiling mounting brackets and suspension hook in stainless steel - quick connector - clamp and safety screws in stainless steel

ATTENTION !
Do not install on surfaces subject to strong vibrations, outdoors on hanging cables, or on walls under metallic grates, or on poles, and in any case, never expose the fixture to direct sunlight.
Check the compatibility between the material constituting the product and the space where it will be installed.
We recommend the use of fixtures made of steel with direct exposure to sunlight.

EMERGENCY LIGHTING

Type of emergency	S.A.
Emergency operation time	1h

STANDARDS AND COMPLIANCE

Photobiological safety class	RG0
Markings and tests	CE
Reference standards	EN60598-1. With degree of protection according to EN60529. The lighting fixture meets all IFS and BRC requirements, and the regulation of the HACCP Directive regarding lighting systems installed in food processing plants.
Laboratory Tests	- the UL 94 Standard is considered a reference for rating the ignition characteristics of plastic materials. The watertight fixtures are made of V2 class material that self-extinguishes in 25 seconds. - passes the Glow Wire Test at 850 °C.
Energy Label	C

GEAR

Upon request	- radar sensor for ON-OFF watertight fixtures, subcode -19 - wiring through continuous row, subcode -0072 - wiring for centrally powered emergency lighting, subcode -0050 - 1-10V dimmer + emergency wiring, subcode -94
--------------	---

WARRANTY

After sales warranty	7 yr
----------------------	------

974 - Ottima - Energy Saving

Code: 164787-07

