


420 - Rigo - LED

Code: 214567-00



420 Rigo - LED

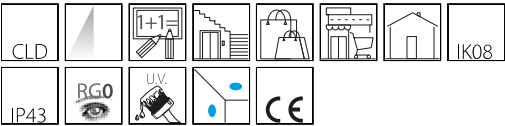

GENERAL INFORMATION

Article	420 - Rigo - LED
Code	214567-00

DIMENSIONS AND WEIGHT

Length (mm)	1176 mm
Width (mm)	80 mm
Height (mm)	42 mm
Weight (Kg)	1.5 kg


ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Min Frequency (Hz)	50 Hz
Max Frequency (Hz)	60 Hz
Frequency (Hz)	50 Hz
Wiring name	CLD
Power factor	≥0.9
Insulation class	Class I
Controllability	None

420 - Rigo - LED

Code: 214567-00

PHOTOMETRIC DATA

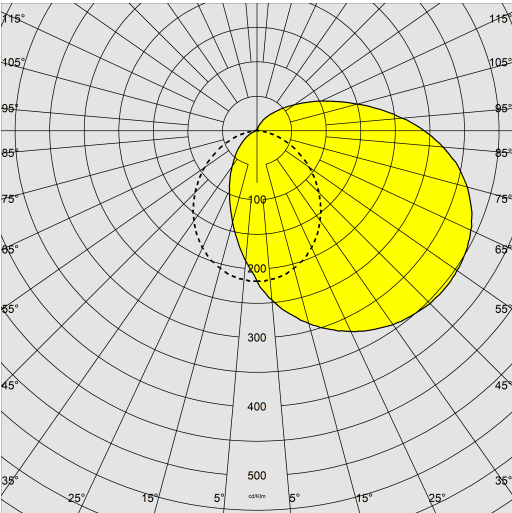

Lighting source	LED
CRI	>80
Luminous flux (output) (lm)	2858 lm
Power absorption (total) (W)	28 W
CCT	4000 K
Luminous efficacy (lm/W)	102 lm/W
LED flux maintenance	50000 hr, L 90, B 10


MECHANICAL CHARACTERISTICS

Impact resistance rating (IK)	IK08
IP	43



420 - Rigo - LED

Code: 214567-00

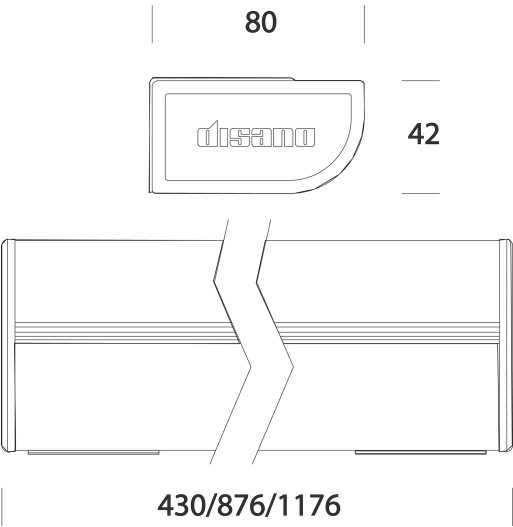

DOWNLOAD

MOUNTS

AssemblyInstructions rigo 09-22.pdf

DESIGNS

BIM 420 rigo 01-26.zip

TechnicalDrawing 420n.dxf



MATERIALS AND COLOURS

Housing	in extruded aluminium with end caps.
Diffuser	in polycarbonate, transparent, anti-glare, shatterproof and V2 self-extinguishing, UV stabilised.
Coating	polyester powder coated, UV-stabilised, anti-yellowing, phosphate pre-treatment.
Colour	White
Equipment	with brackets for wall or ceiling mounting. The luminaires with switch and/or socket are IP20 rated.

EMERGENCY LIGHTING

Emergency power supply type	Not present
-----------------------------	-------------

STANDARDS AND COMPLIANCE

Photobiological safety class	RG0
Markings and tests	CE
Reference standards	EN60598-1. They have a degree of protection according to the EN60529 standard.
Energy Label	C

WARRANTY

After sales warranty	3 yr
----------------------	------