


Pastilla - CCT POWER SWITCH

Code: 22042518-00



Pastilla is an extensive range of robust and reliable wall-mounted or ceiling-mounted luminaires designed for both indoor and outdoor lighting applications. Made with a self-extinguishing polycarbonate body, they feature IP 65 protection and double insulation. The range includes luminaires of various sizes and wattages, allowing users to choose the perfect solution for any need.

The family of products has grown with the addition of the new Pastilla CCT and Power switch version, an evolution of the historic Fosnova product.

This update incorporates advanced technological components to offer high-quality LED light and maximize energy savings. The CCT switch colour adjustment technology is revolutionary, enabling users to easily choose different colour settings. This ensures the perfect light for any lighting design, and it's incredibly easy to use. With a single code, this system provides installers with a wide range of choices readily available. Choosing the LED colour and power to suit specific needs ensures optimal lighting conditions at all times.



GENERAL INFORMATION

|         |                             |
|---------|-----------------------------|
| Article | Pastilla - CCT POWER SWITCH |
| Code    | 22042518-00                 |

DIMENSIONS AND WEIGHT

|                   |        |
|-------------------|--------|
| Height (mm)       | 50 mm  |
| Diameter (Ø) (mm) | 330 mm |
| Weight (Kg)       | 1.1 kg |


ELECTRICAL CHARACTERISTICS AND CONTROLS

|                     |                                                                     |
|---------------------|---------------------------------------------------------------------|
| Voltage type        | AC                                                                  |
| Min Voltage (V)     | 220 V                                                               |
| Max Voltage (V)     | 240 V                                                               |
| Min Frequency (Hz)  | 50 Hz                                                               |
| Max Frequency (Hz)  | 60 Hz                                                               |
| Frequency (Hz)      | 50 Hz                                                               |
| Wiring name         | CLD                                                                 |
| Power factor        | >0.9                                                                |
| Insulation class    | Class II                                                            |
| Controllability     | Yes (Integrated)                                                    |
| Integrated Function | CCT adjustable with Dip Switch, Flux/power settings with Dip Switch |

Pastilla - CCT POWER SWITCH

Code: 22042518-00

PHOTOMETRIC DATA

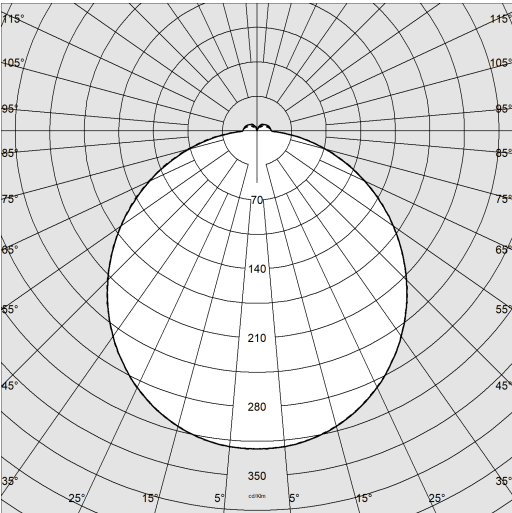

|                              |                      |
|------------------------------|----------------------|
| Lighting source              | LED                  |
| CRI                          | >80                  |
| Luminous flux (output) (lm)  | 2019 lm              |
| Power absorption (total) (W) | 24 W                 |
| CCT                          | 4000 K               |
| Luminous efficacy (lm/W)     | 84 lm/W              |
| LED flux maintenance         | 50000 hr, L 90, B 10 |

MECHANICAL CHARACTERISTICS

|                               |      |
|-------------------------------|------|
| Impact resistance rating (IK) | IK10 |
| IP                            | 65   |



Pastilla - CCT POWER SWITCH

Code: 22042518-00

MATERIALS AND COLOURS

|           |                                                        |
|-----------|--------------------------------------------------------|
| Housing   | vandal-resistant, self-extinguishing polycarbonate.    |
| Diffuser  | In clear polycarbonate, anti-dazzle, vandal resistant. |
| Colour    | White                                                  |
| Equipment | supplied with bracket for ceiling/wall installation.   |

EMERGENCY LIGHTING


|                             |             |
|-----------------------------|-------------|
| Emergency power supply type | Not present |
|-----------------------------|-------------|

STANDARDS AND COMPLIANCE

|                              |                                                            |
|------------------------------|------------------------------------------------------------|
| Photobiological safety class | RG0                                                        |
| Markings and tests           | CE                                                         |
| Reference standards          | EN60598-1. With degree of protection according to EN60529. |
| Energy Label                 | D                                                          |

WARRANTY

|                      |      |
|----------------------|------|
| After sales warranty | 3 yr |
|----------------------|------|



Ø220-280-330



50

DOWNLOAD

MOUNTS

AssemblyInstructions CCT PASTILLA QT  
rev0.pdf

DESIGNS

TechnicalDrawing pastcct.dxf



Pastilla - CCT POWER SWITCH

| Code        | Wtot | K     | Lumen  | CRI    |
|-------------|------|-------|--------|--------|
| 22042516-00 | 10W  | 3000K | 950lm  | CRI>80 |
| 22042516-00 | 10W  | 4000K | 1055lm | CRI>80 |
| 22042516-00 | 10W  | 5700K | 998lm  | CRI>80 |
| 22042516-00 | 15W  | 3000K | 1425lm | CRI>80 |
| 22042516-00 | 15W  | 4000K | 1568lm | CRI>80 |
| 22042516-00 | 15W  | 5700K | 1496lm | CRI>80 |
| 22042517-00 | 13W  | 3000K | 1359lm | CRI>80 |
| 22042517-00 | 13W  | 4000K | 1482lm | CRI>80 |
| 22042517-00 | 13W  | 5700K | 1420lm | CRI>80 |
| 22042517-00 | 18W  | 3000K | 1881lm | CRI>80 |
| 22042517-00 | 18W  | 4000K | 2052lm | CRI>80 |
| 22042517-00 | 18W  | 5700K | 1967lm | CRI>80 |
| 22042518-00 | 17W  | 3000K | 1857lm | CRI>80 |
| 22042518-00 | 17W  | 4000K | 2019lm | CRI>80 |
| 22042518-00 | 17W  | 5700K | 1938lm | CRI>80 |
| 22042518-00 | 24W  | 3000K | 2622lm | CRI>80 |
| 22042518-00 | 24W  | 4000K | 2850lm | CRI>80 |
| 22042518-00 | 24W  | 5700K | 2736lm | CRI>80 |
| 22042516-19 | 10W  | 3000K | 950lm  | CRI>80 |
| 22042516-19 | 10W  | 4000K | 1055lm | CRI>80 |
| 22042516-19 | 10W  | 5700K | 998lm  | CRI>80 |
| 22042516-19 | 15W  | 3000K | 1425lm | CRI>80 |
| 22042516-19 | 15W  | 4000K | 1568lm | CRI>80 |
| 22042516-19 | 15W  | 5700K | 1496lm | CRI>80 |
| 22042517-19 | 13W  | 3000K | 1359lm | CRI>80 |
| 22042517-19 | 13W  | 4000K | 1482lm | CRI>80 |
| 22042517-19 | 13W  | 5700K | 1420lm | CRI>80 |
| 22042517-19 | 18W  | 3000K | 1881lm | CRI>80 |
| 22042517-19 | 18W  | 4000K | 2052lm | CRI>80 |
| 22042517-19 | 18W  | 5700K | 1967lm | CRI>80 |
| 22042518-19 | 17W  | 3000K | 1857lm | CRI>80 |
| 22042518-19 | 17W  | 4000K | 2019lm | CRI>80 |
| 22042518-19 | 17W  | 5700K | 1938lm | CRI>80 |
| 22042518-19 | 24W  | 3000K | 2622lm | CRI>80 |
| 22042518-19 | 24W  | 4000K | 2850lm | CRI>80 |
| 22042518-19 | 24W  | 5700K | 2736lm | CRI>80 |



Please contact the Consulting and Design Centre for any technical information. The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The total wattage absorbed by the system will not exceed 10% of the reported value. Technical lighting data may be subject to changes and improvements due to the fast evolution of the technology. Sunday, July 19, 2026