


Pastilla J 2.0 - EM 3h + SENSOR

Code: 22042710-1957



Pastilla J 2.0 is a versatile fixture for wall or ceiling installation, designed to meet different lighting requirements. Available in standard, emergency, or presence sensor versions, it offers flexible solutions for residential, commercial and shared spaces. Its compact, functional design allows easy integration into any environment, ensuring reliability, high lighting efficiency and energy savings thanks to latest-generation LED technology.



GENERAL INFORMATION

|         |                                 |
|---------|---------------------------------|
| Article | Pastilla J 2.0 - EM 3h + SENSOR |
| Code    | 22042710-1957                   |

DIMENSIONS AND WEIGHT

|                   |        |
|-------------------|--------|
| Height (mm)       | 63 mm  |
| Diameter (Ø) (mm) | 280 mm |
| Weight (Kg)       | 1.4 kg |


ELECTRICAL CHARACTERISTICS AND CONTROLS

|                    |                       |
|--------------------|-----------------------|
| Voltage type       | AC                    |
| Min Voltage (V)    | 220 V                 |
| Max Voltage (V)    | 240 V                 |
| Min Frequency (Hz) | 50 Hz                 |
| Max Frequency (Hz) | 60 Hz                 |
| Frequency (Hz)     | 50 Hz                 |
| Wiring name        | CLD-E                 |
| Power factor       | >0.9                  |
| Insulation class   | Class II              |
| Controllability    | Yes (Integrated)      |
| Sensor technology  | Constant light sensor |

Pastilla J 2.0 - EM 3h + SENSOR

Code: 22042710-1957

PHOTOMETRIC DATA

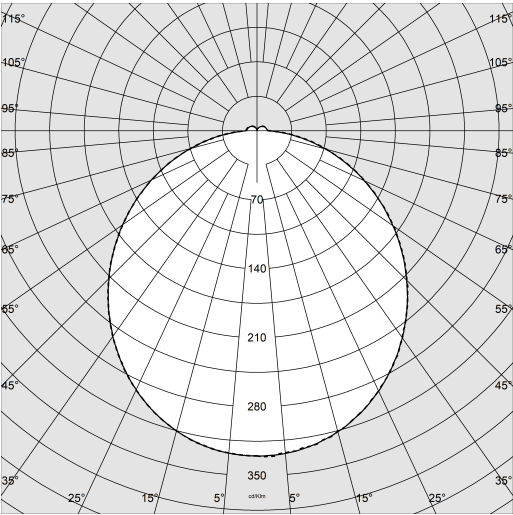

|                              |                      |
|------------------------------|----------------------|
| Distribution type            | Plafone              |
| Lighting source              | LED                  |
| CRI                          | >80                  |
| Luminous flux (output) (lm)  | 2026 lm              |
| Power absorption (total) (W) | 19 W                 |
| CCT                          | 4000 K               |
| Luminous efficacy (lm/W)     | 107 lm/W             |
| LED flux maintenance         | 50000 hr, L 90, B 10 |

MECHANICAL CHARACTERISTICS

|                               |      |
|-------------------------------|------|
| Impact resistance rating (IK) | IK10 |
| IP                            | 65   |



Pastilla J 2.0 - EM 3h + SENSOR

Code: 22042710-1957

MATERIALS AND COLOURS

|                                                                                                                                          |                                                       |
|------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------|
| Housing                                                                                                                                  | vandal-resistant, self-extinguishing polycarbonate.   |
| Diffuser                                                                                                                                 | In clear polycarbonate, anti-dazzle, vandal resistant |
| Colour                                                                                                                                   | White                                                 |
| Equipment                                                                                                                                | supplied with bracket for ceiling/wall installation.  |
| The remote control (code 81412785) is to be purchased separately at an additional cost. It allows changing parameters after installation |                                                       |

EMERGENCY LIGHTING

|                             |                        |
|-----------------------------|------------------------|
| Emergency power supply type | Luminaire with battery |
| Type of emergency           | S.A.                   |
| Emergency operation time    | 3h                     |

STANDARDS AND COMPLIANCE

|                              |                                                                                  |
|------------------------------|----------------------------------------------------------------------------------|
| Photobiological safety class | RG0                                                                              |
| Markings and tests           | CE                                                                               |
| Reference standards          | EN 60598-1. They have a degree of protection according to the EN 60529 standard. |
| Energy Label                 | C                                                                                |


GEAR

|         |                                                                                                                                                                                                                                                                       |
|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Sensors | SENSOR - TECHNICAL SPECIFICATIONS<br>Detection area: 75%<br>Detection distance: ø 4-6 m (adjustable)<br>Hold time: 1 min<br>Ambient light: Disable<br>Power consumption: ~ 0,9 W<br>Microwave frequency/power: 5.8GHz / <0.3mW<br>Operating temperature: -25°C ÷ 60°C |
|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

Upon request

WARRANTY

|                      |      |
|----------------------|------|
| After sales warranty | 5 yr |
|----------------------|------|



Ø 280



3

DOWNLOAD

MOUNTS

AssemblyInstructions pastilla j 07-23.pdf

DESIGNS

TechnicalDrawing pastj.dxf

