

Pastilla J 2.0 - EM 3h + SENSOR

Code: 22042710-19573000

GENERAL INFORMATION



Pastilla J 2.0 is a versatile fixture for wall or ceiling installation, designed to meet different lighting requirements. Available in standard, emergency, or presence sensor versions, it offers flexible solutions for residential, commercial and shared spaces. Its compact, functional design allows easy integration into any environment, ensuring reliability, high lighting efficiency and energy savings thanks to latest-generation LED technology.



Article	Pastilla J 2.0 - EM 3h + SENSOR
Code	22042710-19573000

DIMENSIONS AND WEIGHT

Height (mm)	63 mm
Diameter (Ø) (mm)	280 mm
Weight (Kg)	1.4 kg


ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Min Frequency (Hz)	50 Hz
Max Frequency (Hz)	60 Hz
Frequency (Hz)	50 Hz
Wiring name	CLD-E
Power factor	>0.9
Insulation class	Class II
Controllability	Yes (Integrated)
Sensor technology	Constant light sensor

Pastilla J 2.0 - EM 3h + SENSOR

Code: 22042710-19573000

PHOTOMETRIC DATA

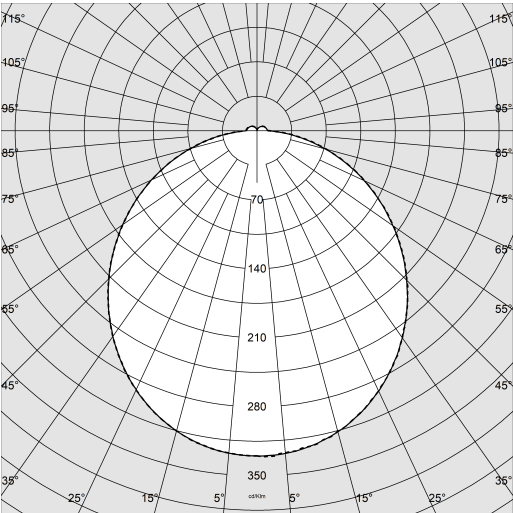

Distribution type	Plafone
Lighting source	LED
CRI	>80
Luminous flux (output) (lm)	1863 lm
Power absorption (total) (W)	19 W
CCT	3000 K
Luminous efficacy (lm/W)	98 lm/W
LED flux maintenance	50000 hr, L 90, B 10

MECHANICAL CHARACTERISTICS

Impact resistance rating (IK)	IK10
IP	65



Pastilla J 2.0 - EM 3h + SENSOR

Code: 22042710-19573000

MATERIALS AND COLOURS

Housing	vandal-resistant, self-extinguishing polycarbonate.
Diffuser	In clear polycarbonate, anti-dazzle, vandal resistant
Colour	White
Equipment	supplied with bracket for ceiling/wall installation.
The remote control (code 81412785) is to be purchased separately at an additional cost. It allows changing parameters after installation	

EMERGENCY LIGHTING

Emergency power supply type	Luminaire with battery
Type of emergency	S.A.
Emergency operation time	3h

STANDARDS AND COMPLIANCE


Photobiological safety class	RG0
Markings and tests	CE
Reference standards	EN 60598-1. They have a degree of protection according to the EN 60529 standard.
Energy Label	D

GEAR

Sensors	SENSOR - TECHNICAL SPECIFICATIONS Detection area: 75% Detection distance: ø 4-6 m (adjustable) Hold time: 1 min Ambient light: Disable Power consumption: ~ 0,9 W Microwave frequency/power: 5.8GHz / <0.3mW Operating temperature: -25°C ÷ 60°C
Upon request	

WARRANTY

After sales warranty	5 yr
----------------------	------



Ø 280



DOWNLOAD

MOUNTS

AssemblyInstructions pastilla j 07-23.pdf

DESIGNS

TechnicalDrawing pastj.dxf

