

Code: 22044011-00

CLD							IP20
IK07		RG0	LOW FLICKER	Colour quality	CCT POWER		CE



The main feature of this spotlight is the new colour-changing/output power technology: with the two built-in switches positioned on the fixture's body, you can select 5 different colour temperatures, adjusting to most installations. (2700/3000/3500/4000/5700K)



Article	Zoom medium - MULTICOLOR
Code	22044011-00

DIMENSIONS AND WEIGHT

Length (mm)	165 mm
Width (mm)	75 mm
Height (mm)	147 mm
Weight (Kg)	0.8 kg


ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Min Frequency (Hz)	50 Hz
Max Frequency (Hz)	60 Hz
Frequency (Hz)	50 Hz
Wiring name	CLD
Power factor	≥0.95
Insulation class	Class I
Controllability	Yes (Integrated)
Integrated Function	Adjustable CCT, Flux/power settings with Dip Switch

Zoom medium - MULTICOLOR

Code: 22044011-00

PHOTOMETRIC DATA

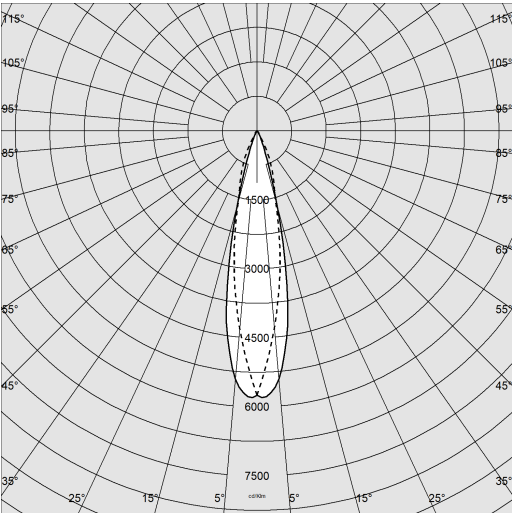

Lighting source	LED COB
CRI	>90
Luminous flux (output) (lm)	1848 lm
Power absorption (total) (W)	25 W
CCT	4000 K
Low Flicker	luminaire with very low flicker: evenly distributed light for greater visual safety.
LED flux maintenance	50000 hr, L 80, B 20

MECHANICAL CHARACTERISTICS

Impact resistance rating (IK)	IK07
IP	20



Zoom medium - MULTICOLOR

Code: 22044011-00

MATERIALS AND COLOURS


Housing	in die-cast aluminum.
Coating	powder coated with UV resistant polyester epoxy paint.
Colour	White

STANDARDS AND COMPLIANCE

Photobiological safety class	RG0
Markings and tests	CE, ENEC
Reference standards	EN60598-1. With degree of protection according to EN60529.
Energy Label	F

WARRANTY

After sales warranty	3 yr
----------------------	------

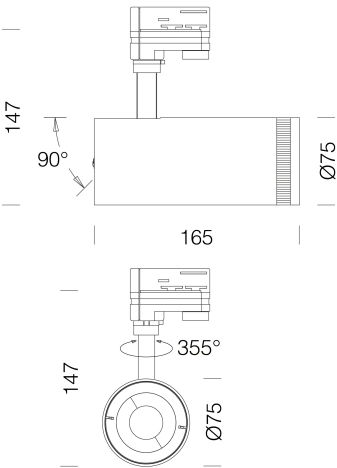

DOWNLOAD

MOUNTS

AssemblyInstructions Zoom Multicolor rev0.pdf

DESIGNS

TechnicalDrawing 44011.dxf



Zoom medium - MULTICOLOR

Code: 22044011-00

