

Code: 22044034-00

 CLD							IP20
IK07	 RG0	 LOW FLICKER	 Colour quality	 CCT POWER	 €		



- select 3 different colour temperatures, adjusting to most installations.
- select the type of brightness with 3 output power ranges.



Article	Asso B - mini - ZOOM MULTICOLOR - CCT POWER SWITCH
Code	22044034-00


Height (mm)	131 mm
Diameter (Ø) (mm)	50 mm
Weight (Kg)	0.4 kg

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Min Frequency (Hz)	50 Hz
Max Frequency (Hz)	60 Hz
Frequency (Hz)	50 Hz
Wiring name	CLD
Power factor	≥0.95
Rated Current	200 mA
Insulation class	Class II
Controllability	Yes (Integrated)
Integrated Function	Adjustable CCT, Manual luminous flux adjustment

Asso B - mini - ZOOM MULTICOLOR - CCT POWER SWITCH

Code: 22044034-00

PHOTOMETRIC DATA

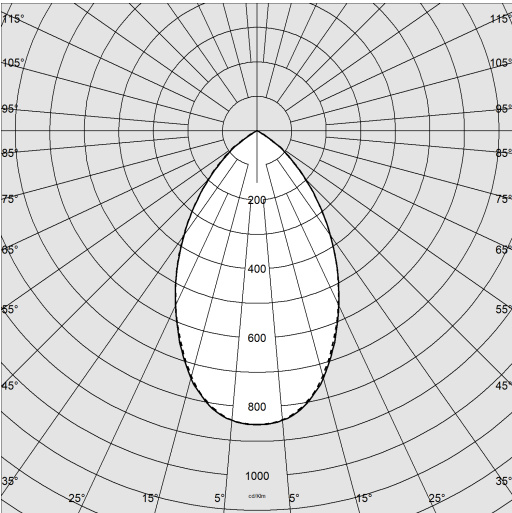

Lighting source	LED COB
CRI	>90
Luminous flux (output) (lm)	725 lm
Power absorption (total) (W)	8 W
CCT	4000 K
Low Flicker	luminaire with very low flicker: evenly distributed light for greater visual safety.
LED flux maintenance	50000 hr, L 80, B 20

MECHANICAL CHARACTERISTICS

Impact resistance rating (IK)	IK07
IP	20



Asso B - mini - ZOOM MULTICOLOR - CCT POWER SWITCH

Code: 22044034-00

MATERIALS AND COLOURS


Housing	in die-cast aluminum.
Coating	powder coated with UV resistant polyester epoxy paint.
Colour	Black

STANDARDS AND COMPLIANCE

Photobiological safety class	RG0
Markings and tests	CE
Reference standards	EN60598-1. With degree of protection according to EN60529.
Energy Label	E

WARRANTY

After sales warranty	5 yr
----------------------	------

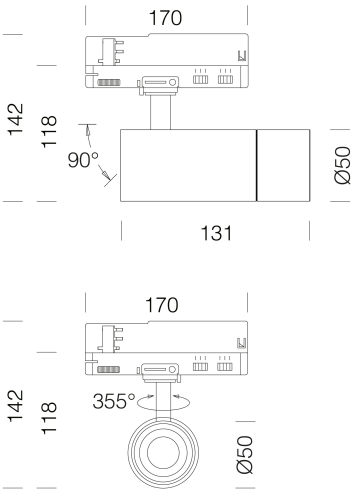

DOWNLOAD

MOUNTS

AssemblyInstructions ASSO ZOOM REV5.pdf

DESIGNS

TechnicalDrawing 22044014.dxf



Asso B - mini - ZOOM MULTICOLOR - CCT POWER SWITCH

Code	LEDmA	Wtot	K	Lumen	CRI	°
22044014-00	150	6	2700K/4000K/6000K	423lm ÷ 538lm	CRI>90	18° ÷ 60°
22044014-00	200	8	2700K/4000K/6000K	579lm ÷ 725lm	CRI>90	18° ÷ 60°
22044014-00	250	10	2700K/4000K/6000K	699lm ÷ 881lm	CRI>90	18° ÷ 60°
22044034-00	150	6	2700K/4000K/6000K	423lm ÷ 538lm	CRI>90	18° ÷ 60°
22044034-00	200	8	2700K/4000K/6000K	579lm ÷ 725lm	CRI>90	18° ÷ 60°
22044034-00	250	10	2700K/4000K/6000K	699lm ÷ 881lm	CRI>90	18° ÷ 60°