
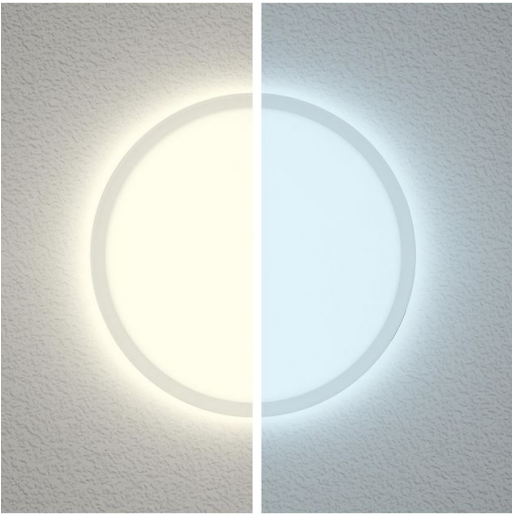


Cosmic R - CCT SWITCH - decor LINE

Code: 22046311-00

GENERAL INFORMATION



Ceiling-mounted LED wall sconce with a modern, ultra-slim design, easy to install on the wall or ceiling. New to the range is the Cosmic series featuring the revolutionary CCT colour switch that allows selecting from a variety of colour settings. This innovative system ensures the perfect light for any lighting design, and it's incredibly easy to use. With a single code, it provides installers with a wide range of choices readily available. Choosing the LED colour to suit specific needs ensures optimal lighting conditions at all times. The Cosmic ceiling lighting fixture, available in two sizes, comes in a round shape and minimalist design. Even as an interior design element, it can create unique lighting effects on walls thanks to the plastic material of its body. Cosmic serves as a stylish furnishing solution to create soft, diffused, and decorative lighting and backlighting effects in hotel lounges, shopping cen-tre corridors, restaurant entrances and executive offices.



|         |                                    |
|---------|------------------------------------|
| Article | Cosmic R - CCT SWITCH - decor LINE |
| Code    | 22046311-00                        |

DIMENSIONS AND WEIGHT

|                   |        |
|-------------------|--------|
| Height (mm)       | 26 mm  |
| Diameter (Ø) (mm) | 293 mm |
| Weight (Kg)       | 0.7 kg |


ELECTRICAL CHARACTERISTICS AND CONTROLS

|                     |                                |
|---------------------|--------------------------------|
| Voltage type        | AC                             |
| Min Voltage (V)     | 220 V                          |
| Max Voltage (V)     | 240 V                          |
| Min Frequency (Hz)  | 50 Hz                          |
| Max Frequency (Hz)  | 60 Hz                          |
| Frequency (Hz)      | 50 Hz                          |
| Wiring name         | CLD                            |
| Power factor        | ≥0.9                           |
| Insulation class    | Class II                       |
| Controllability     | Yes (Integrated)               |
| Integrated Function | CCT adjustable with Dip Switch |

Cosmic R - CCT SWITCH - decor LINE

Code: 22046311-00

PHOTOMETRIC DATA

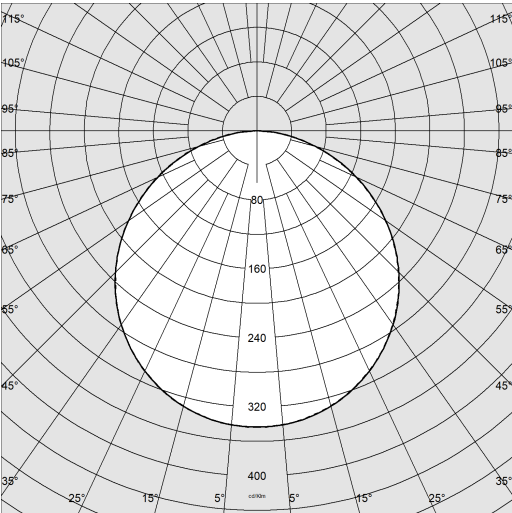

|                              |                      |
|------------------------------|----------------------|
| Lighting source              | LED                  |
| CRI                          | >80                  |
| Luminous flux (output) (lm)  | 2734 lm              |
| Power absorption (total) (W) | 24 W                 |
| CCT                          | 4000 K               |
| Luminous efficacy (lm/W)     | 114 lm/W             |
| LED flux maintenance         | 30000 hr, L 80, B 10 |

MECHANICAL CHARACTERISTICS

|                               |      |
|-------------------------------|------|
| Impact resistance rating (IK) | IK04 |
| IP                            | 44   |



Cosmic R - CCT SWITCH - decor LINE

Code: 22046311-00

MATERIALS AND COLOURS

|          |                                                    |
|----------|----------------------------------------------------|
| Housing  | thermoplastic material, resistant to small impacts |
| Diffuser | thermoplastic material                             |
| Colour   | White                                              |

EMERGENCY LIGHTING


|                             |             |
|-----------------------------|-------------|
| Emergency power supply type | Not present |
|-----------------------------|-------------|

STANDARDS AND COMPLIANCE

|                              |                                                            |
|------------------------------|------------------------------------------------------------|
| Photobiological safety class | RG0                                                        |
| Markings and tests           | CE                                                         |
| Reference standards          | EN60598-1. With degree of protection according to EN60529. |
| Energy Label                 | E                                                          |

WARRANTY

|                      |      |
|----------------------|------|
| After sales warranty | 3 yr |
|----------------------|------|



Ø 293-400



26

DOWNLOAD

MOUNTS

AssemblyInstructions COSMIC CCT rev2.pdf

DESIGNS

TechnicalDrawing 46311.dxf



Cosmic R - CCT SWITCH - decor LINE

| Code        | Wtot | K     | Lumen  | CRI    |
|-------------|------|-------|--------|--------|
| 22046311-00 | 24W  | 3000K | 2052lm | CRI>80 |
| 22046311-00 | 24W  | 4000K | 2160lm | CRI>80 |
| 22046311-00 | 24W  | 5700K | 2160lm | CRI>80 |
| 22046312-00 | 36W  | 3000K | 3078lm | CRI>80 |
| 22046312-00 | 36W  | 4000K | 3240lm | CRI>80 |
| 22046312-00 | 36W  | 5700K | 3240lm | CRI>80 |