



Cosmic R - CCT SWITCH - decor LINE

Code: 22046312-00

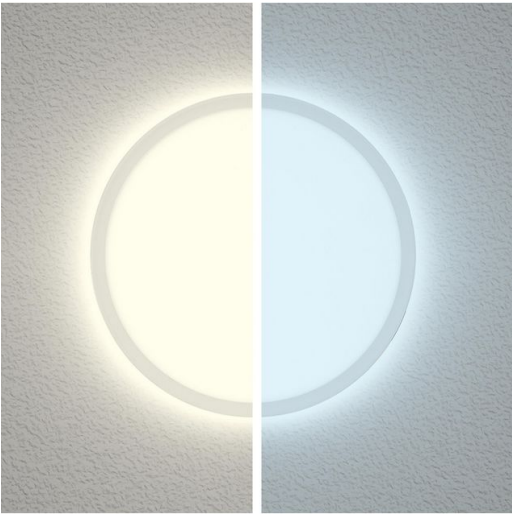

Ceiling-mounted LED wall sconce with a modern, ultra-slim design, easy to install on the wall or ceiling. New to the range is the Cosmic series featuring the revolutionary CCT colour switch that allows selecting from a variety of colour settings. This innovative system ensures the perfect light for any lighting design, and it's incredibly easy to use. With a single code, it provides installers with a wide range of choices readily available. Choosing the LED colour to suit specific needs ensures optimal lighting conditions at all times. The Cosmic ceiling lighting fixture, available in two sizes, comes in a round shape and minimalist design. Even as an interior design element, it can create unique lighting effects on walls thanks to the plastic material of its body. Cosmic serves as a stylish furnishing solution to create soft, diffused, and decorative lighting and backlighting effects in hotel lounges, shopping cen-tre corridors, restaurant entrances and executive offices.



GENERAL INFORMATION

Article	Cosmic R - CCT SWITCH - decor LINE
Code	22046312-00

DIMENSIONS AND WEIGHT

Height (mm)	26 mm
Diameter (Ø) (mm)	400 mm
Weight (Kg)	0.9 kg


ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Min Frequency (Hz)	50 Hz
Max Frequency (Hz)	60 Hz
Frequency (Hz)	50 Hz
Wiring name	CLD
Power factor	≥0.9
Insulation class	Class II
Controllability	Yes (Integrated)
Integrated Function	CCT adjustable with Dip Switch

Cosmic R - CCT SWITCH - decor LINE

Code: 22046312-00

PHOTOMETRIC DATA

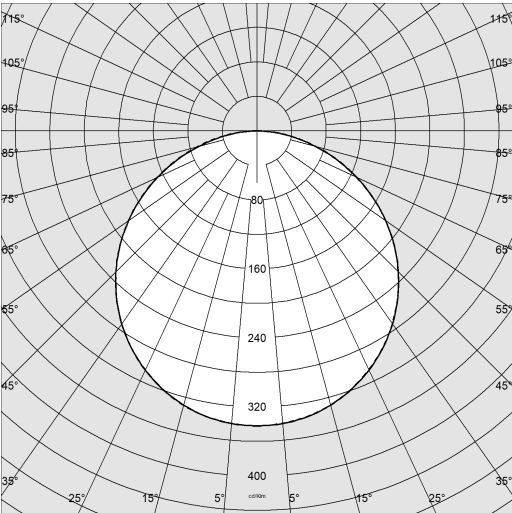

Lighting source	LED
CRI	>80
Luminous flux (output) (lm)	4340 lm
Power absorption (total) (W)	36 W
CCT	4000 K
Luminous efficacy (lm/W)	121 lm/W
LED flux maintenance	30000 hr, L 80, B 10

MECHANICAL CHARACTERISTICS

Impact resistance rating (IK)	IK04
IP	44



Cosmic R - CCT SWITCH - decor LINE

Code: 22046312-00

MATERIALS AND COLOURS

Housing	thermoplastic material, resistant to small impacts
Diffuser	thermoplastic material
Colour	White

EMERGENCY LIGHTING


Emergency power supply type	Not present
-----------------------------	-------------

STANDARDS AND COMPLIANCE

Photobiological safety class	RG0
Markings and tests	CE
Reference standards	EN60598-1. With degree of protection according to EN60529.
Energy Label	E

WARRANTY

After sales warranty	3 yr
----------------------	------



Ø 293-400



26

DOWNLOAD

MOUNTS

AssemblyInstructions COSMIC CCT rev2.pdf

DESIGNS

TechnicalDrawing 46311.dxf



Cosmic R - CCT SWITCH - decor LINE

Code	Wtot	K	Lumen	CRI
22046311-00	24W	3000K	2052lm	CRI>80
22046311-00	24W	4000K	2160lm	CRI>80
22046311-00	24W	5700K	2160lm	CRI>80
22046312-00	36W	3000K	3078lm	CRI>80
22046312-00	36W	4000K	3240lm	CRI>80
22046312-00	36W	5700K	3240lm	CRI>80