


Honey L94 - UGR<19 - CCT SWITCH

Code: 22073112-00

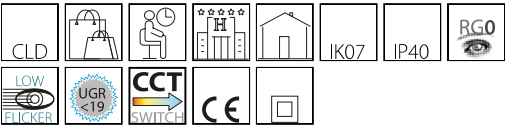

The Honey range of recessed and ceiling lighting fixtures was developed to meet the most sophisticated demands of contemporary architectural design. With its geometric precision optics and wide selection of refined finishes, Honey offers the perfect balance of advanced lighting technology and bespoke aesthetics.

Each luminaire is designed for seamless integration across a variety of settings (retail, commercial, public, cultural, and more), providing fully customisable solutions in terms of light output, shape, and colour. The geometric optics deliver controlled, flexible light distribution, while the versatile colour options offer full creative freedom, highlighting surrounding materials and architectural elements.



GENERAL INFORMATION

Article	Honey L94 - UGR<19 - CCT SWITCH
Code	22073112-00

DIMENSIONS AND WEIGHT

Height (mm)	58 mm
Diameter (Ø) (mm)	94 mm
Weight (Kg)	0.3 kg


ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Min Frequency (Hz)	50 Hz
Max Frequency (Hz)	60 Hz
Frequency (Hz)	50 Hz
Wiring name	CLD
Power factor	>0.9
Insulation class	Class II
Controllability	None

Honey L94 - UGR<19 - CCT SWITCH

Code: 22073112-00

PHOTOMETRIC DATA

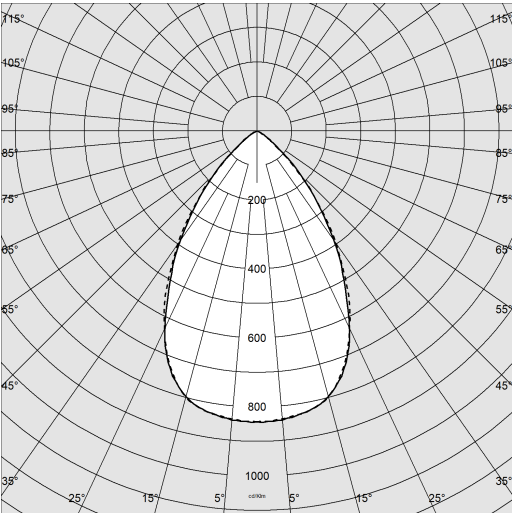

Lighting source	LED SMD
CRI	>90
Luminous flux (output) (lm)	1089 lm
Power absorption (total) (W)	10 W
CCT	4000 K
Luminous efficacy (lm/W)	109 lm/W
Unified glare rating UGR (EN 12464-1) (Reflectance coefficient: ceiling 0.7 - walls 0.5)	UGR<19, according to standard EN 12464.
Low Flicker	luminaire with very low flicker: evenly distributed light for greater visual safety.
LED flux maintenance	50000 hr, L 90, B 10


MECHANICAL CHARACTERISTICS

Impact resistance rating (IK)	IK07
IP	40



Honey L94 - UGR<19 - CCT SWITCH

Code: 22073112-00



DOWNLOAD

MOUNTS

AssemblyInstructions HONEY Plafone rev0.pdf

DESIGNS

BIM Honey L94 12-25.zip

TechnicalDrawing honey L94.dxf



MATERIALS AND COLOURS

Housing	in die cast aluminium.
Optics	Lens: in PMMA lens with high efficiency output and very low glare rate. Optic: in anti-glare metalized plastic material.
Colour	White, Gold
	Luminous flux maintenance 80%: 70.000h (L80B10) o luminous flux maintenance 90%: 50.000h (L90B10).

EMERGENCY LIGHTING

Emergency power supply type	Not present
-----------------------------	-------------

STANDARDS AND COMPLIANCE

Photobiological safety class	RG0
Markings and tests	CE
Reference standards	EN60598-1. They have a degree of protection according to the EN60529 standard.
Energy Label	E

GEAR

Sensors	
Upon request	version with black housing.

WARRANTY

After sales warranty	5 yr
----------------------	------

Honey L94 - UGR<19 - CCT SWITCH

Code	Wtot	K	Lumen	CRI
22073110-00	10W	2700K	974lm	CRI>90
22073110-00	10W	3000K	1116lm	CRI>90
22073110-00	10W	4000K	1123lm	CRI>90
22073111-00	10W	2700K	708lm	CRI>90
22073111-00	10W	3000K	812lm	CRI>90
22073111-00	10W	4000K	816lm	CRI>90
22073112-00	10W	2700K	945lm	CRI>90
22073112-00	10W	3000K	1083lm	CRI>90
22073112-00	10W	4000K	1089lm	CRI>90
22073113-00	10W	2700K	994lm	CRI>90
22073113-00	10W	3000K	1139lm	CRI>90
22073113-00	10W	4000K	1145lm	CRI>90



Please contact the Consulting and Design Centre for any technical information. The reported luminous flux is the flux emitted by the light source with a tolerance of $\pm 10\%$ compared to the indicated value. The total wattage absorbed by the system will not exceed 10% of the reported value. Technical lighting data may be subject to changes and improvements due to the fast evolution of the technology. Sunday, July 19, 2026