

Focus SLIM Q 111 - DIP SWITCH - applique

Code: 22202531-00

GENERAL INFORMATION



Article	Focus SLIM Q 111 - DIP SWITCH - applique
Code	22202531-00

DIMENSIONS AND WEIGHT

Length (mm)	320 mm
Width (mm)	50 mm
Height (mm)	186 mm
Weight (Kg)	2 kg

ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Min Frequency (Hz)	50 Hz
Max Frequency (Hz)	60 Hz
Frequency (Hz)	50 Hz
Wiring name	CLD
Power factor	>0.95
Insulation class	Class I
Controllability	None



Focus SLIM, a perfect luminaire, with an impactful design and highly advanced technological solutions and equipped with high color rendering LEDs. The points of sale must express a precise, easily identifiable style, but must also know how to renew themselves by offering ever new and attractive environments. An innovative spot, therefore, fully adjustable and absolutely decisive in creating an extraordinarily effective lighting project: the rooms, as well as each object, will receive perfect lighting.

DIP switch adjustment: the luminaire is equipped with a built-in DIP switch driver for setting the output current; this will enable to choose the right light flux for each lighting design. The chance to choose the needed LED pilot current will allow you to have the right amount of power adjusted to any given design requirement. Choosing a lower current will increase the efficiency and improve energy savings, while a higher current will provide more light and make it possible to reduce the number of luminaires installed.



Focus SLIM Q 111 - DIP SWITCH - applique

Code: 22202531-00

PHOTOMETRIC DATA



Lighting source	LED
CRI	92
Luminous flux (output) (lm)	4422 lm
Power absorption (total) (W)	39 W
CCT	3000 K
Low Flicker	luminaire with very low flicker: evenly distributed light for greater visual safety.
LED flux maintenance	50000 hr, L 90, B 10

MECHANICAL CHARACTERISTICS

Impact resistance rating (IK)	IK07
IP	40

Focus SLIM Q 111 - DIP SWITCH - applique

Code: 22202531-00

MATERIALS AND COLOURS

Housing	in die-cast aluminium.
Coating	epoxy polyester powder coating resistant to UV rays.
Colour	Black
Luminous flux maintenance 80%: 70.000h (L80B10) o luminous flux maintenance 90%: 50.000h (L90B10).	

STANDARDS AND COMPLIANCE


Photobiological safety class	RG0
Markings and tests	CE
Energy Label	E

GEAR

Sensors	
Upon request	DALI -1241 and -6841 dimmable version.

WARRANTY

After sales warranty	5 yr
----------------------	------

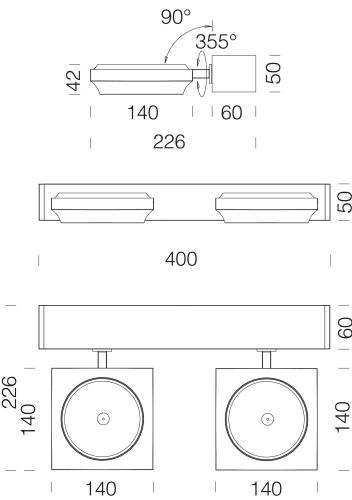

DOWNLOAD

MOUNTS

AssemblyInstructions FOCUS Slim Q parete doppio REV2.pdf

DESIGNS

TechnicalDrawing 202510.dxf



Focus SLIM Q 111 - DIP SWITCH - applique

Code	LEDmA	Wtot	K	Lumen	CRI	°
22202510-00	700	26W	3000K	2x1593lm	CRI92	26°
22202510-00	850	31W	3000K	2x1911lm	CRI92	26°
22202510-00	1050	39W	3000K	2x2327lm	CRI92	26°
22202530-00	700	26W	3000K	2x1593lm	CRI92	26°
22202530-00	850	31W	3000K	2x1911lm	CRI92	26°
22202530-00	1050	39W	3000K	2x2327lm	CRI92	26°
22202511-00	700	26W	3000K	2x1513lm	CRI92	37°
22202511-00	850	31W	3000K	2x1815lm	CRI92	37°
22202511-00	1050	39W	3000K	2x2211lm	CRI92	37°
22202531-00	700	26W	3000K	2x1513lm	CRI92	37°
22202531-00	850	31W	3000K	2x1815lm	CRI92	37°
22202531-00	1050	39W	3000K	2x2211lm	CRI92	37°
22202512-00	700	26W	3000K	2x1442lm	CRI92	65°
22202512-00	850	31W	3000K	2x1729lm	CRI92	65°
22202512-00	1050	39W	3000K	2x2106lm	CRI92	65°
22202532-00	700	26W	3000K	2x1442lm	CRI92	65°
22202532-00	850	31W	3000K	2x1729lm	CRI92	65°
22202532-00	1050	39W	3000K	2x2106lm	CRI92	65°
22202510-68	700	26W	4000K	2x1136lm	CRI92	26°
22202510-68	850	31W	4000K	2x1380lm	CRI92	26°
22202510-68	1050	39W	4000K	2x1567lm	CRI92	26°
22202530-68	700	26W	4000K	2x1136lm	CRI92	26°
22202530-68	850	31W	4000K	2x1380lm	CRI92	26°
22202530-68	1050	39W	4000K	2x1567lm	CRI92	26°
22202511-68	700	26W	4000K	2x1513lm	CRI92	37°
22202511-68	850	31W	4000K	2x1815lm	CRI92	37°
22202511-68	1050	39W	4000K	2x2443lm	CRI92	37°
22202531-68	700	26W	4000K	2x1513lm	CRI92	37°
22202531-68	850	31W	4000K	2x1815lm	CRI92	37°
22202531-68	1050	39W	4000K	2x2443lm	CRI92	37°
22202512-68	700	26W	4000K	2x1514lm	CRI92	65°
22202512-68	850	31W	4000K	2x1816lm	CRI92	65°
22202512-68	1050	39W	4000K	2x2211lm	CRI92	65°
22202532-68	700	26W	4000K	2x1514lm	CRI92	65°
22202532-68	850	31W	4000K	2x1816lm	CRI92	65°
22202532-68	1050	39W	4000K	2x2211lm	CRI92	65°



Please contact the Consulting and Design Centre for any technical information. The reported luminous flux is the flux emitted by the light source with a tolerance of ± 10% compared to the indicated value. The total wattage absorbed by the system will not exceed 10% of the reported value. Technical lighting data may be subject to changes and improvements due to the fast evolution of the technology. Sunday, July 19, 2026