


6402 - Rapid system - one-lamp LED

Code: 237523-07

PHOTOMETRIC DATA

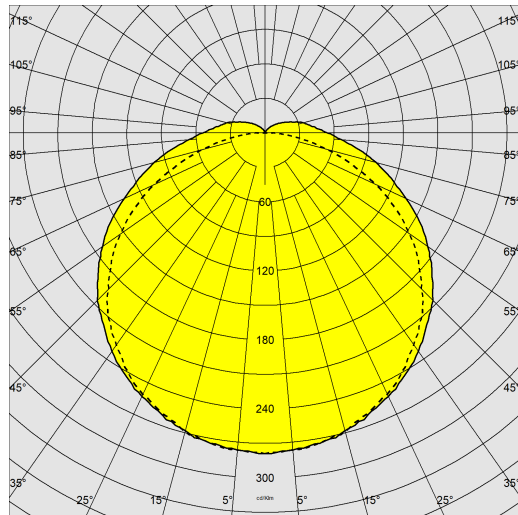

Lighting source	LED
CRI	>80
Luminous flux (output) (lm)	4942 lm
Power absorption (total) (W)	37 W
CCT	4000 K
Low Flicker	luminaire with very low flicker: evenly distributed light for greater visual safety.
LED flux maintenance	80000 hr, L 80, B 20

MECHANICAL CHARACTERISTICS



Impact resistance rating (IK)	IK07
IP	40



6402 - Rapid system - one-lamp LED

Code: 237523-07

MATERIALS AND COLOURS

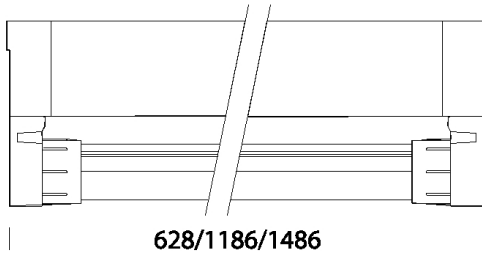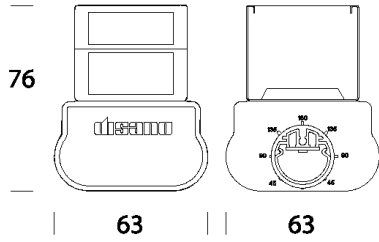

DOWNLOAD

MOUNTS

[AssemblyInstructions rapid system 07-20.pdf](#)

DESIGNS

[TechnicalDrawing 6402.dxf](#)



Housing	in galvanized rolled steel, with anti-cutting turned-up edges and ABS end caps.
Diffuser	micro-ribbed methacrylate
Coating	pre-painted in oven with polyester resin, UV-stabilised, phosphate pre-treatment.
Colour	White
Equipment	-fixing pawl in nylon. - LED tubes can be rotated to direct the light and optimise the output of the optical accessories.

EMERGENCY LIGHTING

Emergency power supply type	Luminaire with battery
Type of emergency	S.A.
Emergency operation time	1h

STANDARDS AND COMPLIANCE











Photobiological safety class	RG0
Markings and tests	CE
Reference standards	EN60598-1. They have a degree of protection according to the EN60529 standard.
Energy Label	C

WARRANTY

After sales warranty	5 yr
----------------------	------

6402 - Rapid system - one-lamp LED

Code: 237523-07

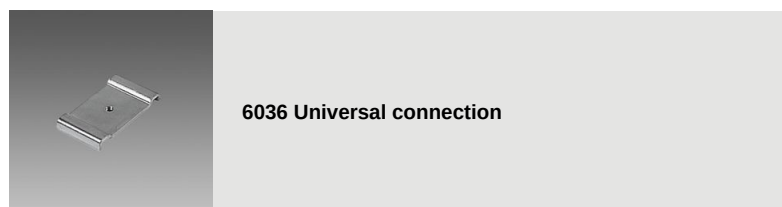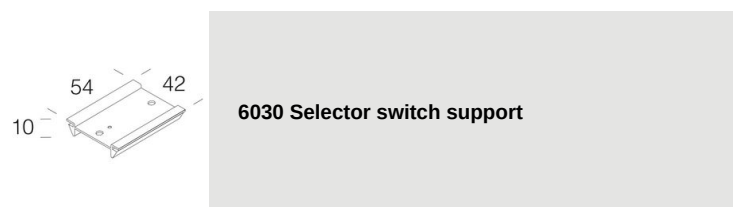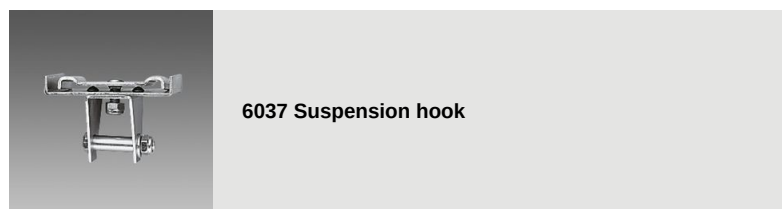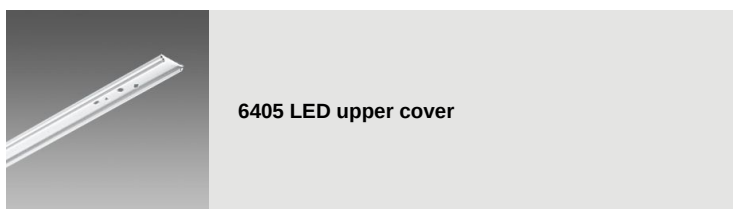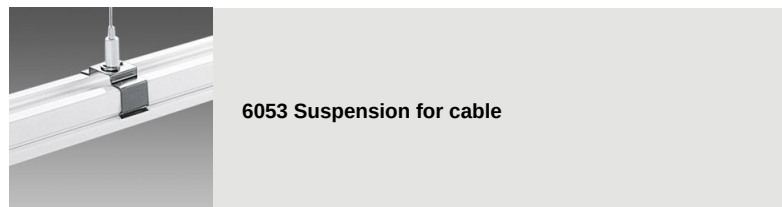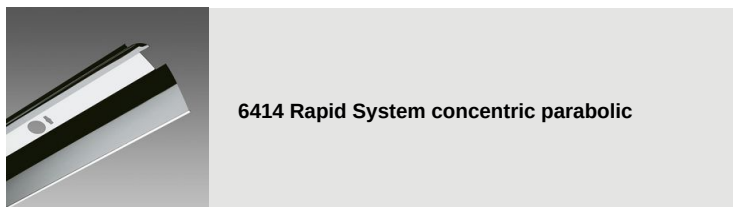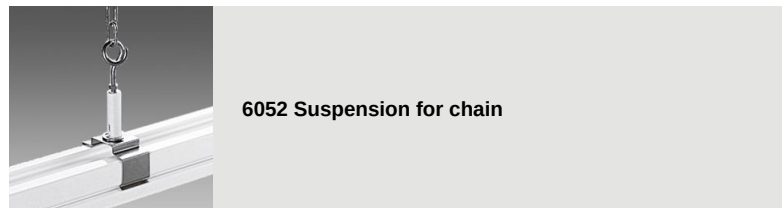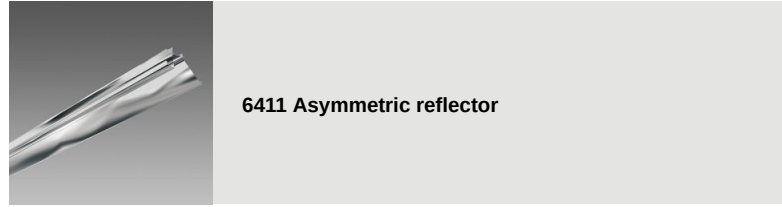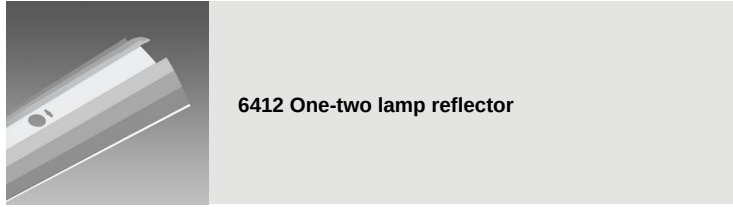

6402 - Rapid system - one-lamp LED

Code: 237523-07

