

3117 - Ghost LED - Painted diffuser

Code: 323128-00

GENERAL INFORMATION



Ghost is an industrial reflector with an essential and contemporary design, engineered to deliver high lighting performance in industrial and commercial environments. Its robust construction ensures reliability and operational continuity, while the uniform light output provides visual comfort and efficiency. Ideal for factories, warehouses, showrooms and retail spaces, Ghost combines functionality, versatility and lighting quality.



Article	3117 - Ghost LED - Painted diffuser
Code	323128-00

DIMENSIONS AND WEIGHT

Height (mm)	460 mm
Diameter (Ø) (mm)	400 mm
Weight (Kg)	3.3 kg


ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Min Frequency (Hz)	50 Hz
Max Frequency (Hz)	60 Hz
Frequency (Hz)	50 Hz
Wiring name	CLD
Power factor	≥0.95
Insulation class	Class I
Controllability	None

3117 - Ghost LED - Painted diffuser

Code: 323128-00

PHOTOMETRIC DATA

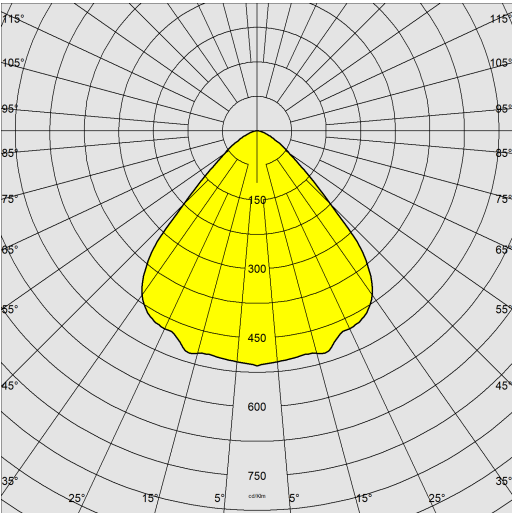

Lighting source	LED
CRI	80
Luminous flux (output) (lm)	2620 lm
Power absorption (total) (W)	28 W
CCT	4000 K
Luminous efficacy (lm/W)	94 lm/W
LED flux maintenance	90000 hr, L 80, B 10

MECHANICAL CHARACTERISTICS

Impact resistance rating (IK)	IK08
IP	43
Ambient temperature - min	-20 °C
Ambient temperature - max	30 °C

3117 - Ghost LED - Painted diffuser

Code: 323128-00

MATERIALS AND COLOURS

Housing	in die-cast aluminium with cooling fins integrated in the cover.
Diffuser	in transparent polycarbonate. Internally prismatic. Externally painted in silver colour, shatterproof and V2 self-extinguishing, UV stabilised.
Heat sink	cooling fins integrated in the cover.
Coating	the fully automated powder-coating cycle involves a polyester-based, salt-spray corrosion-resistant and UV-stabilised paint.
Colour	Grey9007
Equipment	hook for suspension mounting. Rubber grommet Ø 1/2 gas inch (cable min Ø 9, max Ø12).

EMERGENCY LIGHTING


Emergency power supply type	Not present
-----------------------------	-------------

STANDARDS AND COMPLIANCE

Photobiological safety class	RG0 Ethr
Markings and tests	CE
Reference standards	EN60598-1. They have a degree of protection according to the EN60529 standard.
Energy Label	D

WARRANTY

After sales warranty	3 yr
----------------------	------

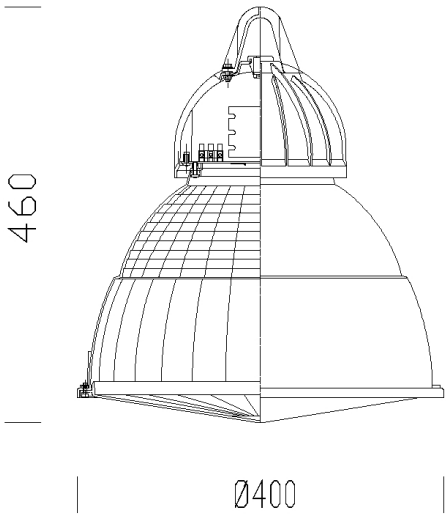

DOWNLOAD

MOUNTS

AssemblyInstructions ghost 03-23.pdf

DESIGNS

TechnicalDrawing 3116.dxf

