

3142 - Campana LED

Code: 326785-00



3142 Campana LED



GENERAL INFORMATION

Article	3142 - Campana LED
Code	326785-00

DIMENSIONS AND WEIGHT

Height (mm)	555 mm
Diameter (Ø) (mm)	480 mm
Weight (Kg)	8.3 kg

INSTALLATION

Surface exposed to wind (mm)	L 160000 mm², F 160000 mm²
------------------------------	----------------------------


ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Min Frequency (Hz)	50 Hz
Max Frequency (Hz)	60 Hz
Frequency (Hz)	50 Hz
Wiring name	CLD
Wiring	facteur de puissance ≥0,9.
Power factor	≥0.9
Rated Current	530 mA
Surge protector (common) (EN 61547)	6 kV, 10 kV
Insulation class	Class II
Controllability	None

3142 - Campana LED

Code: 326785-00

PHOTOMETRIC DATA

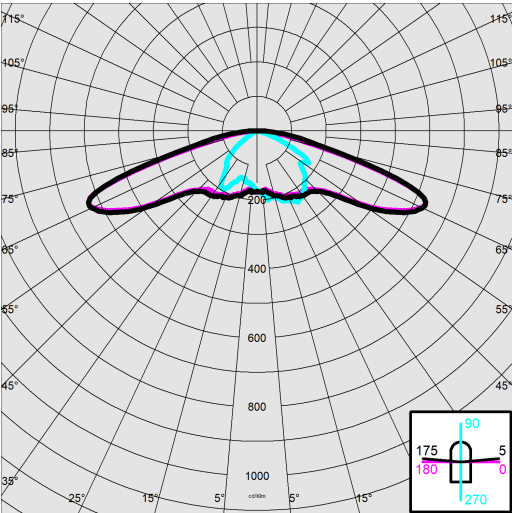

Lighting source	LED
CRI	>70
Luminous flux (output) (lm)	8512 lm
Power absorption (total) (W)	78 W
CCT	4000 K
Luminous efficacy (lm/W)	109 lm/W
Low Flicker	luminaire with very low flicker: evenly distributed light for greater visual safety.
LED flux maintenance	80000 hr, L 80, B 20

MECHANICAL CHARACTERISTICS

Impact resistance rating (IK)	IK08
IP	65
Ambient temperature - min	-30 °C
Ambient temperature - max	40 °C

3142 - Campana LED

Code: 326785-00

MATERIALS AND COLOURS

DOWNLOAD

MOUNTS

AssemblyInstructions campana 03-23.pdf

DESIGNS

BIM 3142 Campana LED - 20200604.zip

TechnicalDrawing 3142.dxf



Housing	in die-cast aluminium with closing hook.
Optics	in high-performance metallised polycarbonate with micro-facets to reduce direct glare.
Diffuser	tempered glass, 4 mm thick, resistant to thermal shock and impact (UNI EN 12150-1:2001).
Heat sink	built-in.
Pole connection	/
Coating	pre-treatment of metal surface, polyester powder coating to ensure resistance to corrosion and salt spray fogs, UV stabilised.
Special coating (UPON REQUEST)	upon request: available with coating tested to withstand corrosion tests in aggressive artificial atmospheres (UNI EN ISO 9227) or marine environments (sea front).
Colour	White, Graphite
Equipment	<ul style="list-style-type: none">- selector switch.- waterproof connector for quick installation with no need to open the fixture- anti-condensation valve.- temperature controller with auto-reset.- EN 61547 compliant surge protection.- ADVANCED PROG built-in functions.

STANDARDS AND COMPLIANCE

Photobiological safety class	RG0 Ethr
Markings and tests	CE, ENEC
Reference standards	EN60598-1. With degree of protection according to EN60529.
Energy Label	C

WARRANTY

After sales warranty	5 yr
----------------------	------

3142 - Campana LED

Code: 326785-00




304 Threaded connection



301 Oliva arm



300 Oliva



56 Suspension mount



211 Sector connector



507 Liberty arm



1498 Liberty Pole



302 Wall mount



1508 Fluted pole \varnothing 120 with base



1509 Fluted pole \varnothing 120