


## 3143 - Campana LED

Code: 326786-00

### GENERAL INFORMATION



Article	3143 - Campana LED
Code	326786-00

### DIMENSIONS AND WEIGHT

Height (mm)	480 mm
Diameter (Ø) (mm)	555 mm
Weight (Kg)	7.6 kg

### INSTALLATION

Surface exposed to wind (mm)	L 160000 mm <sup>2</sup> , F 160000 mm <sup>2</sup>
------------------------------	---

### ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Min Frequency (Hz)	50 Hz
Max Frequency (Hz)	60 Hz
Frequency (Hz)	50 Hz
Wiring name	CLD
Power factor	≥0.9
Surge protector (common) (EN 61547)	10 kV, 10 kV
Insulation class	Class II
Controllability	None




3143 Campana LED



## 3143 - Campana LED

Code: 326786-00

### PHOTOMETRIC DATA

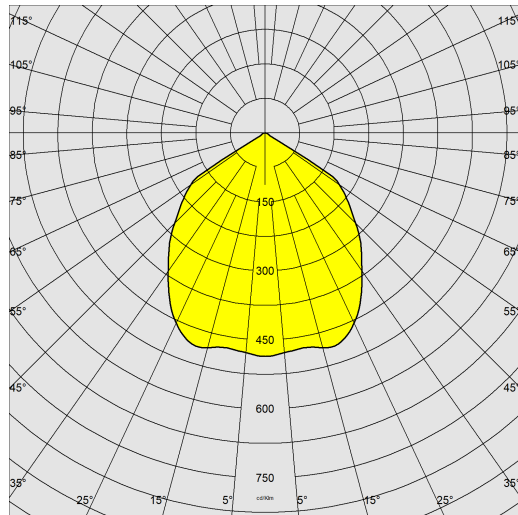

Lighting source	LED COB
CRI	80
Luminous flux (output) (lm)	4366 lm
Power absorption (total) (W)	43 W
CCT	4000 K
Luminous efficacy (lm/W)	102 lm/W
Low Flicker	luminaire with very low flicker: evenly distributed light for greater visual safety.
LED flux maintenance	80000 hr, L 80, B 20

### MECHANICAL CHARACTERISTICS


Impact resistance rating (IK)	IK08
IP	65
Ambient temperature - min	-30 °C
Ambient temperature - max	40 °C



## 3143 - Campana LED

Code: 326786-00

### MATERIALS AND COLOURS

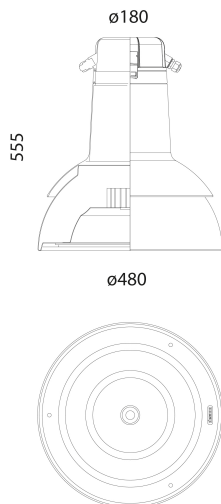

### DOWNLOAD

#### MOUNTS

[AssemblyInstructions campana 03-23.pdf](#)

#### DESIGNS

[BIM 3143 Campana LED - 20200604.zip](#)

[TechnicalDrawing 3143.dxf](#)



Housing	in die-cast aluminium with closing hook.
Optics	anodised and polished 99.85 aluminium.
Diffuser	tempered glass, 4 mm thick, resistant to thermal shock and impact (UNI EN 12150-1:2001).
Heat sink	built-in.
Pole connection	/
Coating	the fully automated powder-coating cycle involves a polyester-based, salt-spray corrosion-resistant and UV-stabilised paint.
Special coating (UPON REQUEST)	Upon request: protective coating recommended for marine environments within 5 km (3 miles) of the sea.
Colour	White, Graphite
Equipment	<ul style="list-style-type: none"> <li>- selector switch.</li> <li>- waterproof connector for quick installation with no need to open the fixture</li> <li>- anti-condensation valve.</li> <li>- temperature controller with auto-reset.</li> <li>- EN 61547 compliant surge protection.</li> <li>- ADVANCED PROG built-in functions.</li> </ul>

### STANDARDS AND COMPLIANCE

Photobiological safety class	RG0 Ethr
Markings and tests	CE
Reference standards	EN60598-1. They have a degree of protection according to the EN60529 standard.
Energy Label	C

### WARRANTY


After sales warranty	5 yr
----------------------	------

# 3143 - Campana LED

Code: 326786-00



304 Threaded connection



301 Oliva arm




300 Vert olive



56 Suspension mount




211 Sector connector



507 Liberty arm



1498 Liberty Pole



302 Wall mount



1508 Fluted pole  $\varnothing$  120 with base



1509 Fluted pole  $\varnothing$  120