

3143 - Campana LED

Code: 326786-73



3143 Campana LED



GENERAL INFORMATION

Article	3143 - Campana LED
Code	326786-73

DIMENSIONS AND WEIGHT

Height (mm)	555 mm
Diameter (Ø) (mm)	480 mm
Weight (Kg)	7.6 kg

INSTALLATION

Surface exposed to wind (mm)	L 160000 mm², F 160000 mm²
------------------------------	----------------------------


ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Min Frequency (Hz)	50 Hz
Max Frequency (Hz)	60 Hz
Frequency (Hz)	50 Hz
Wiring name	CLD
Power factor	≥0.9
Surge protector (common) (EN 61547)	10 kV, 10 kV
Insulation class	Class II
Controllability	None

3143 - Campana LED

Code: 326786-73

PHOTOMETRIC DATA

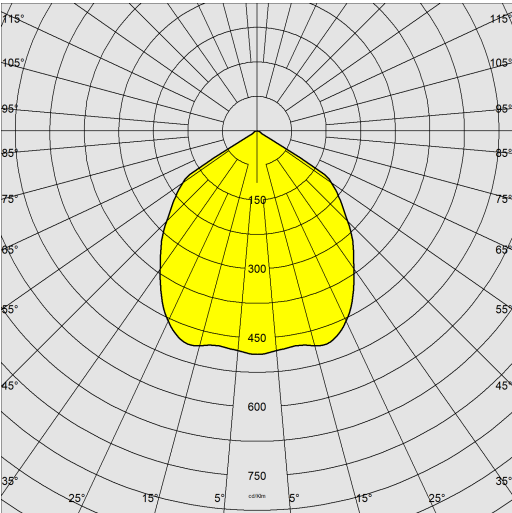

Lighting source	LED COB AMBER
CRI	amber
Luminous flux (output) (lm)	4273 lm
Power absorption (total) (W)	43 W
CCT	2200 K
Luminous efficacy (lm/W)	99 lm/W
Low Flicker	luminaire with very low flicker: evenly distributed light for greater visual safety.
LED flux maintenance	80000 hr, L 80, B 20


MECHANICAL CHARACTERISTICS

Impact resistance rating (IK)	IK08
IP	65
Ambient temperature - min	-30 °C
Ambient temperature - max	40 °C

3143 - Campana LED

Code: 326786-73

MATERIALS AND COLOURS

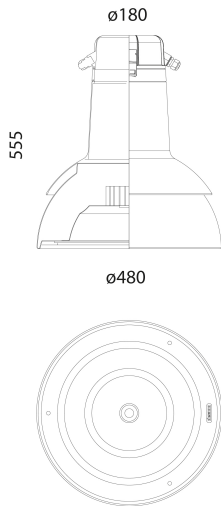

DOWNLOAD

MOUNTS

AssemblyInstructions campana 03-23.pdf

DESIGNS

BIM 3143 Campana LED - 20200604.zip

TechnicalDrawing 3143.dxf



Housing	in die-cast aluminium with closing hook.
Optics	anodised and polished 99.85 aluminium.
Diffuser	tempered glass, 4 mm thick, resistant to thermal shock and impact (UNI EN 12150-1:2001).
Heat sink	built-in.
Pole connection	0
Coating	pre-treatment of metal surface, polyester powder coating to ensure resistance to corrosion and salt spray fogs, UV stabilised.
Special coating (UPON REQUEST)	upon request: available with coating tested to withstand corrosion tests in aggressive artificial atmospheres (UNI EN ISO 9227) or marine environments (sea front).
Colour	White, Graphite
Equipment	<ul style="list-style-type: none">- selector switch.- waterproof connector for quick installation with no need to open the fixture- anti-condensation valve.- temperature controller with auto-reset.- EN 61547 compliant surge protection.- ADVANCED PROG built-in functions.

STANDARDS AND COMPLIANCE

Photobiological safety class	RG0 Ethr
Markings and tests	CE
Reference standards	EN60598-1. With degree of protection according to EN60529.
Energy Label	C

WARRANTY

After sales warranty	5 yr
----------------------	------

3143 - Campana LED

Code: 326786-73




304 Threaded connection



301 Oliva arm



300 Oliva



56 Suspension mount




211 Sector connector



507 Liberty arm



1498 Liberty Pole



302 Wall mount



1508 Fluted pole \varnothing 120 with base



1509 Fluted pole \varnothing 120