


3146 - Campana LED

Code: 326791-39

GENERAL INFORMATION

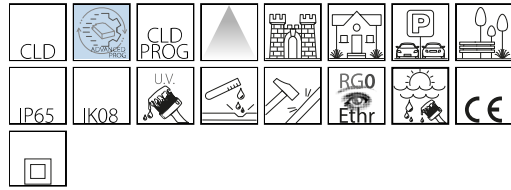

Article	3146 - Campana LED
Code	326791-39

DIMENSIONS AND WEIGHT

Height (mm)	480 mm
Diameter (Ø) (mm)	555 mm
Weight (Kg)	7.5 kg

INSTALLATION

Surface exposed to wind (mm)	L 160000 mm ² , F 160000 mm ²
------------------------------	---

ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Min Frequency (Hz)	50 Hz
Max Frequency (Hz)	60 Hz
Frequency (Hz)	50 Hz
Wiring name	CLD
Wiring	facteur de puissance ≥0,9.
Power factor	≥0.9
Surge protector (common) (EN 61547)	6 kV, 10 kV
Insulation class	Class II
Controllability	None




3146 Campana LED



3146 - Campana LED

Code: 326791-39

PHOTOMETRIC DATA

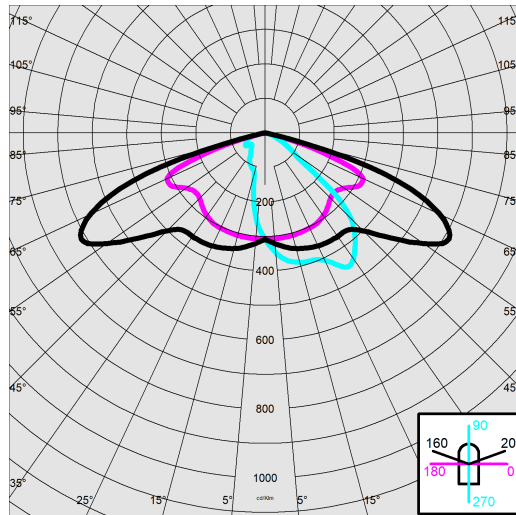

Lighting source	LED
CRI	>70
Luminous flux (output) (lm)	6304 lm
Power absorption (total) (W)	46 W
CCT	3000 K
Luminous efficacy (lm/W)	137 lm/W
Low Flicker	luminaire with very low flicker: evenly distributed light for greater visual safety.
LED flux maintenance	80000 hr, L 80, B 20

MECHANICAL CHARACTERISTICS


Impact resistance rating (IK)	IK08
IP	65
Ambient temperature - min	-30 °C
Ambient temperature - max	40 °C



3146 - Campana LED

Code: 326791-39

MATERIALS AND COLOURS

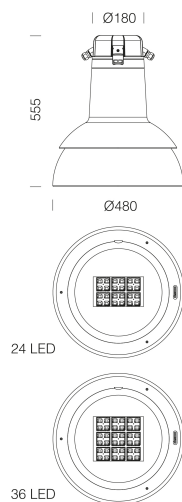

DOWNLOAD

MOUNTS

[AssemblyInstructions campana 03-23.pdf](#)

DESIGNS

[BIM 3146 Campana LED - 20200604.zip](#)

[TechnicalDrawing 3146.dxf](#)



Housing	in die-cast aluminium with closing hook.
Optics	in high-performance PMMA resistant to high temperatures and UV rays.
Diffuser	tempered glass, 4 mm thick, resistant to thermal shock and impact (UNI EN 12150-1:2001).
Heat sink	built-in.
Pole connection	/
Coating	the fully automated powder-coating cycle involves a polyester-based, salt-spray corrosion-resistant and UV-stabilised paint.
Special coating (UPON REQUEST)	Upon request: protective coating recommended for marine environments within 5 km (3 miles) of the sea.
Colour	White, Graphite
Equipment	<ul style="list-style-type: none"> - selector switch. - waterproof connector for quick installation with no need to open the fixture - anti-condensation valve. - temperature controller with auto-reset. - EN 61547 compliant surge protection. - ADVANCED PROG built-in functions.

STANDARDS AND COMPLIANCE

Photobiological safety class	RG0 Ethr
Markings and tests	CE, ENEC
Reference standards	EN60598-1. They have a degree of protection according to the EN60529 standard.
Energy Label	C

WARRANTY


After sales warranty	5 yr
----------------------	------

3146 - Campana LED

Code: 326791-39




304 Threaded connection



301 Oliva arm




300 Vert olive



56 Suspension mount



211 Sector connector



507 Liberty arm



1498 Liberty Pole



302 Wall mount



1508 Fluted pole \varnothing 120 with base



1509 Fluted pole \varnothing 120