


1589 - Braies - CCT-POWER SWITCH - asymmetrical

Code: 330506-00

GENERAL INFORMATION

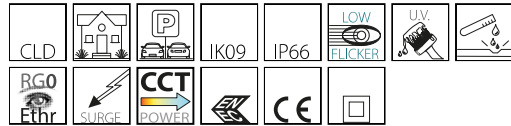

Article	1589 - Braies - CCT-POWER SWITCH - asymmetrical
Code	330506-00

DIMENSIONS AND WEIGHT

Height (mm)	425 mm
Diameter (Ø) (mm)	394 mm
Weight (Kg)	4.2 kg

INSTALLATION

Diameter (Ø) of pole connector (mm)	60-60 mm
Surface exposed to wind (mm)	L 42400 mm ² , F 122000 mm ²

ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Min Frequency (Hz)	50 Hz
Max Frequency (Hz)	60 Hz
Frequency (Hz)	50 Hz
Wiring name	CLD
Power factor	≥0.9
Surge protector (common) (EN 61547)	6 kV, 8 kV
Insulation class	Class II
Controllability	Yes (Integrated)
Integrated Function	CCT adjustable with Dip Switch, Flux/power settings with Dip Switch



Cities aspire to be more liveable for residents and visitors by becoming increasingly more attentive to the quality of public lighting. To achieve this new form of urban decor in the best possible way, Disano presents different families of luminaires that can meet the needs of both big cities and small towns. Among these products, Braies holds a special place. Characterised by a high level of versatility, this innovative luminaire is designed for new urban routes, providing pedestrians and cyclists with more light and safety. The functional design also allows excellent distribution of the light flux and proper heat dissipation, lengthening the system's service life. Another unique feature of Braies is the possibility to choose the power wattage and colour temperature from 3000K or 4000K to guarantee the system's efficiency and to offer the most suitable solution for different installation contexts.

CCT SWITCH = with this integrated switch you can select the desired light colour.


POWER SWITCH = with this integrated switch you can select the fixture's total wattage.



1589 - Braies - CCT-POWER SWITCH - asymmetrical

Code: 330506-00

PHOTOMETRIC DATA

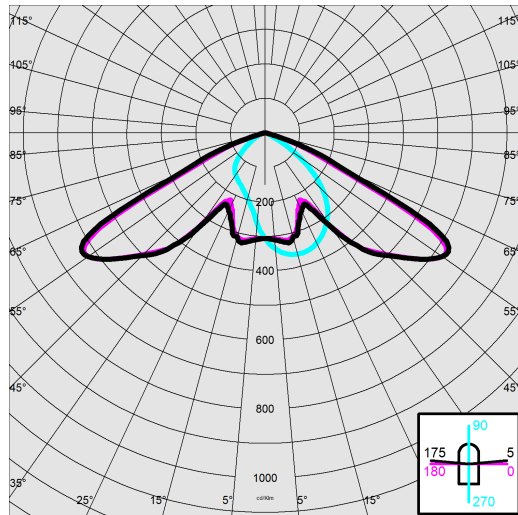

Distribution type	Asymmetric
Lighting source	LED
CRI	>80
Luminous flux (output) (lm)	5600 lm
Power absorption (total) (W)	34 W
CCT	4000 K
Luminous efficacy (lm/W)	165 lm/W
Low Flicker	luminaire with very low flicker: evenly distributed light for greater visual safety.
Colour consistency	SDCM3
LED flux maintenance	100000 hr, L 80, B 20

MECHANICAL CHARACTERISTICS


Impact resistance rating (IK)	IK09
IP	66
Ambient temperature - min	-30 °C
Ambient temperature - max	50 °C



1589 - Braies - CCT-POWER SWITCH - asymmetrical

Code: 330506-00

MATERIALS AND COLOURS

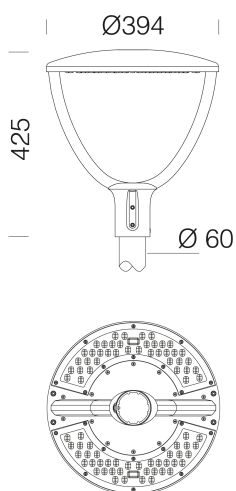

DOWNLOAD

MOUNTS

[AssemblyInstructions braies 12-24.pdf](#)

DESIGNS

[BIM 1589 Braies - 02-25.zip](#)

[TechnicalDrawing braies24.dxf](#)



Housing	made of die-cast aluminium.
Optics	in high-performance PMMA resistant to high temperatures and UV rays.
Pole connection	suitable for 60mm diameter poles.
Coating	the fully automated powder-coating cycle involves a polyester-based, salt-spray corrosion-resistant and UV-stabilised paint., Anthracite = RAL 7021
Colour	Anthracite
Equipment	<ul style="list-style-type: none"> - waterproof connector for quick installation with no need to open the fixture - anti-condensation valve. - temperature controller with auto-reset. - EN 61547 compliant surge protection.

STANDARDS AND COMPLIANCE

Photobiological safety class	RG0 Ethr
Markings and tests	CE, ENEC
Reference standards	EN60598-1. They have a degree of protection according to the EN60529 standard.
Energy Label	C

WARRANTY

After sales warranty	5 yr
----------------------	------

1589 - Braies - CCT-POWER SWITCH - asymmetrical

Code	Wtot	K - ølm - CRI
330505-00	15	4000K - 2400lm - CRI>80
330505-00	15	3000K - 2280lm - CRI>80
330505-00	20	4000K - 3360lm - CRI>80
330505-00	20	3000K - 3192lm - CRI>80
330505-00	25	4000K - 4000lm - CRI>80
330505-00	25	3000K - 3800lm - CRI>80
330505-00	29	4000K - 4800lm - CRI>80
330505-00	29	3000K - 4560lm - CRI>80
330506-00	34	4000K - 5600lm - CRI>80
330506-00	34	3000K - 5320lm - CRI>80
330506-00	42	4000K - 6720lm - CRI>80
330506-00	42	3000K - 6384lm - CRI>80
330506-00	49	4000K - 8160lm - CRI>80
330506-00	49	3000K - 7752lm - CRI>80
330506-00	59	4000K - 9600lm - CRI>80
330506-00	59	3000K - 9120lm - CRI>80