


## 2884 - Saturno ø320 - elliptical

Code: 330760-00

### GENERAL INFORMATION

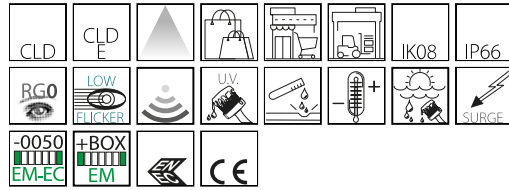

Article	2884 - Saturno ø320 - elliptical
Code	330760-00

### DIMENSIONS AND WEIGHT

Height (mm)	109 mm
Diameter (Ø) (mm)	320 mm
Weight (Kg)	3.6 kg

### ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Min Frequency (Hz)	50 Hz
Max Frequency (Hz)	60 Hz
Frequency (Hz)	50 Hz
Wiring name	CLD
Power factor	≥0.95
Surge protector (common) (EN 61547)	4 kV
Insulation class	Class I
Controllability	None



The Saturno industrial reflector with LED sources is a cutting-edge lighting solution, ideal for industrial facilities, shopping centres, and high-rise environments.

Equipped with narrow, elliptical, and wide beam optics, Saturno offers exceptional versatility in light distribution, delivering uniform and targeted illumination to meet diverse design needs. Its outstanding luminous efficiency ensures reduced energy consumption without compromising on brightness, maintaining intense and consistent illumination. Built to withstand the toughest environmental conditions, Saturno is renowned for its durability and robust design, guaranteeing long-term reliable performance.


Its clean, functional lines blend seamlessly into any setting, enhancing visibility and safety through superior lighting performance. With Saturno, you can achieve top-notch light quality that meets even the most demanding requirements, making it the ideal choice for those seeking efficiency, reliability, and exceptional performance.



## 2884 - Saturno ø320 - elliptical

Code: 330760-00

### PHOTOMETRIC DATA

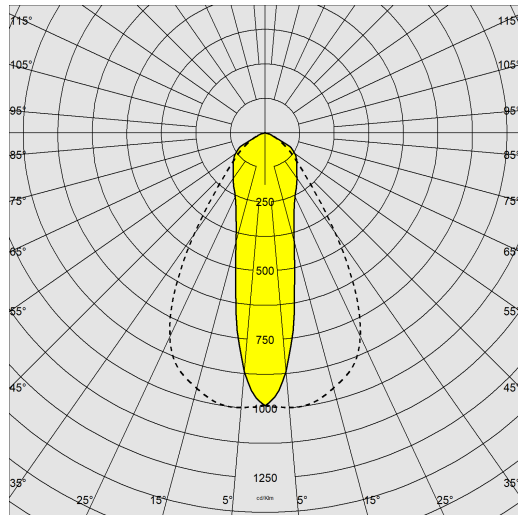

Distribution type	Elliptical Beam
Lighting source	LED
CRI	80
Luminous flux (output) (lm)	7846 lm
Power absorption (total) (W)	64 W
CCT	4000 K
Low Flicker	luminaire with very low flicker: evenly distributed light for greater visual safety.
LED flux maintenance	80000 hr, L 90, B 10


### MECHANICAL CHARACTERISTICS

Impact resistance rating (IK)	IK08
IP	66
Ambient temperature - min	-40 °C
Ambient temperature - max	60 °C

## 2884 - Saturno ø320 - elliptical

Code: 330760-00

### MATERIALS AND COLOURS

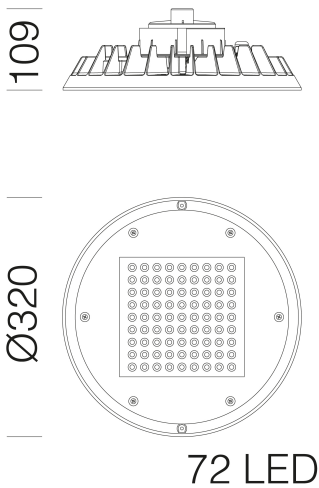

72 LED

### DOWNLOAD

#### MOUNTS

[AssemblyInstructions gonsaturno.pdf](#)

[AssemblyInstructions saturno dismart 01-21.pdf](#)

[AssemblyInstructions saturno sensor 09-17.pdf](#)

[AssemblyInstructions Saturno DALI-EM.pdf](#)

[AssemblyInstructions Saturno DALI.pdf](#)

[AssemblyInstructions saturno320 04-24.pdf](#)

#### DESIGNS

[BIM 2884 Saturno d.320 02-24.zip](#)

[TechnicalDrawing 2884-320.dxf](#)

[TechnicalDrawing3D disano 2884 saturno 72 led.3ds](#)



Housing	in die-cast aluminium with cooling fins integrated in the cover.
Optics	in high-performance PMMA resistant to high temperatures and UV rays.
Diffuser	tempered glass, 4 mm thick, resistant to thermal shock and impact (UNI EN 12150-1:2001).
Heat sink	the heat sink is designed and made to allow the LEDs to operate at temperatures capable of ensuring excellent performance/output and long service life.
Coating	the fully automated powder-coating cycle involves a polyester-based, salt-spray corrosion-resistant and UV-stabilised paint., Anthracite = RAL 7021
Special coating (UPON REQUEST)	Upon request: protective coating recommended for marine environments within 5 km (3 miles) of the sea.
Colour	Graphite
Equipment	<ul style="list-style-type: none"> <li>- waterproof connector for quick installation with no need to open the fixture</li> <li>- temperature controller with auto-reset</li> <li>- EN 61547 compliant surge protection.</li> <li>- anti-condensation valve</li> <li>- EM version is integrated as standard in the nylon box.</li> </ul>

### STANDARDS AND COMPLIANCE

Photobiological safety class	RG0
Markings and tests	CE, ENEC
Energy Label	C

### GEAR

Sensors	<ul style="list-style-type: none"> <li>-Class II fixtures, protection up to 10KV.</li> <li>-Built-in presence/light sensor with ON-OFF function, dimmable (0-10V, 1-10V or DALI) or for ZHAGA socket.</li> <li>-Centralized lighting point control or via external presence/lighting sensors.</li> </ul>
Upon request	<ul style="list-style-type: none"> <li>-CLD D-D (DALI) wiring with subcode -0041.</li> <li>-Emergency wiring with centralized power supply CLD EC (subcode -0050).</li> <li>-AMBER LED 2200K with subcode -73.</li> </ul>

### WARRANTY

After sales warranty	5 yr
----------------------	------

## 2884 - Saturno ø320 - elliptical


Code: 330760-00



Presence sensors - STAND-ALONE



Presence and light sensors - DIMM DALI



1175 EM Box - 997651-00 - S.A.



539 Skirt - 320 mm