


3485 - Mini Giovi AMBER - cycle lane

Code: 331072-44



Mini Giovi represents the latest generation of LED street lamps designed to fit the new light sources and the most advanced lighting control and management systems. Its housing in die-cast aluminium offers very little resistance to wind with its cooling fins specifically studied to allow optimal heat dissipation and efficient LED operation.

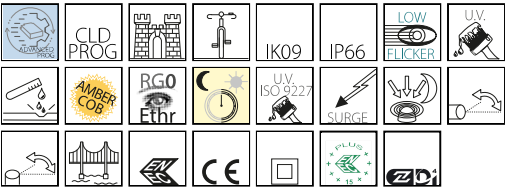

GENERAL INFORMATION

| | |
|---------|--------------------------------------|
| Article | 3485 - Mini Giovi AMBER - cycle lane |
| Code | 331072-44 |

DIMENSIONS AND WEIGHT

| | |
|-------------|---------|
| Length (mm) | 558 mm |
| Width (mm) | 219 mm |
| Height (mm) | 115 mm |
| Weight (Kg) | 7.56 kg |

INSTALLATION

| | |
|-------------------------------------|---------------------------|
| Diameter (Ø) of pole connector (mm) | 46-76 mm |
| Surface exposed to wind (mm) | L 49500 mm², F 155100 mm² |


ELECTRICAL CHARACTERISTICS AND CONTROLS

| | |
|-------------------------------------|-------------|
| Voltage type | AC |
| Min Voltage (V) | 220 V |
| Max Voltage (V) | 240 V |
| Min Frequency (Hz) | 50 Hz |
| Max Frequency (Hz) | 60 Hz |
| Frequency (Hz) | 50 Hz |
| Wiring name | CLD |
| Power factor | ≥0.9 |
| Surge protector (common) (EN 61547) | 6 kV, 10 kV |
| Insulation class | Class II |
| Controllability | None |

3485 - Mini Giovi AMBER - cycle lane

Code: 331072-44

PHOTOMETRIC DATA

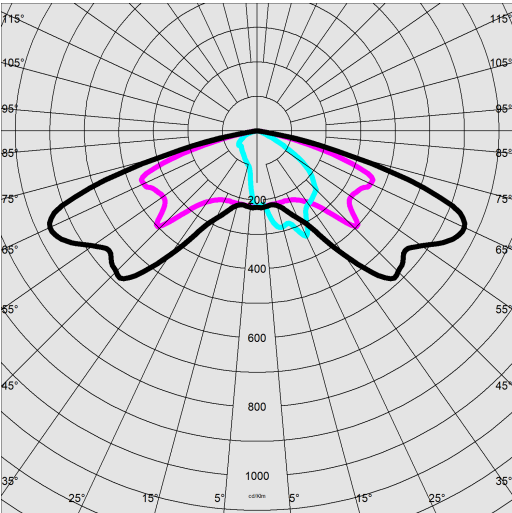

| | |
|------------------------------|--|
| Distribution type | Narrow / High centre distance |
| Lighting source | LED AMBER |
| CRI | amber |
| Luminous flux (output) (lm) | 10457 lm |
| Power absorption (total) (W) | 115 W |
| CCT | 1750 K |
| Luminous efficacy (lm/W) | 91 lm/W |
| Low Flicker | luminaire with very low flicker: evenly distributed light for greater visual safety. |
| LED flux maintenance | 60000 hr, L 80, B 10 |


MECHANICAL CHARACTERISTICS

| | |
|-------------------------------|--------|
| Impact resistance rating (IK) | IK09 |
| IP | 66 |
| Ambient temperature - min | -30 °C |
| Ambient temperature - max | 50 °C |

3485 - Mini Giovi AMBER - cycle lane

Code: 331072-44

MATERIALS AND COLOURS

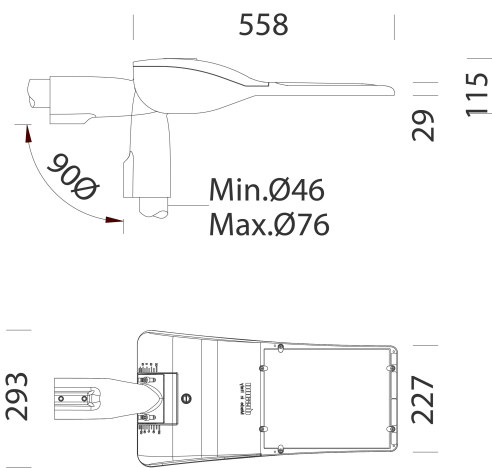

DOWNLOAD

MOUNTS

AssemblyInstructions giovi - minigiovi 09-22.pdf

DESIGNS

TechnicalDrawing minigiovi.dxf

TechnicalDrawing3D 3485 Mini Giovi AMBER - 04-24.zip



| | |
|--------------------------------|---|
| Housing | EN-AB 47100 die-cast aluminium and designed with a very small surface exposed to wind. Cooling fins integrated in the cover. The lid can be removed to access the electrical components. |
| Optics | in high-performance PMMA resistant to high temperatures and UV rays. |
| Diffuser | extra-clear, tempered glass, 4 mm thick, resistant to thermal shock and impact (UNI-EN 12150-1:2001). |
| Heat sink | the heat sink is designed and made to allow the LEDs to operate at temperatures capable of ensuring excellent performance/output and long service life. |
| Pole connection | in die-cast aluminium for poles with a diameter between min. 46 mm and max. 76 mm, adjustable from -20° to +10° for side-mount applications; and from 0° to +20° for for top-mount applications. Tilt pitch 5°. |
| Coating | pre-treatment of metal surface, polyester powder coating to ensure resistance to corrosion and salt spray fogs, UV stabilised. |
| Special coating (UPON REQUEST) | upon request: available with coating tested to withstand corrosion tests in aggressive artificial atmospheres (UNI EN ISO 9227) or marine environments (sea front). |
| Colour | Graphite |
| Equipment | <ul style="list-style-type: none">- waterproof connector for quick installation with no need to open the fixture.- anti-condensation valve.- temperature controller with auto-reset.- EN 61547 compliant surge protection.- ADVANCED PROG built-in functions. |

STANDARDS AND COMPLIANCE

| | |
|------------------------------|--|
| Photobiological safety class | RG0 Ethr |
| Markings and tests | CE, ENEC, ENEC+, ZHAGA D4i |
| Reference standards | EN60598-1. With degree of protection according to EN60529. Registered Design DM/100271. |
| Laboratory Tests | compliant with third-party certified vibration tests pursuant to ANSI C136.31: Street Lighting - Luminaire Vibration. Test level: 3.0G Level 2 for bridge/overpass applications. |
| Energy Label | C |

GEAR

| | |
|--------------|---|
| Upon request | <ul style="list-style-type: none">- virtual midnight device, subcode -30- Nema Socket, subcode -40 (cap to be ordered separately)- Zhaga Socket, subcode -0054 (cap included) |
|--------------|---|

WARRANTY

| | |
|----------------------|------|
| After sales warranty | 5 yr |
|----------------------|------|

3485 - Mini Giovi AMBER - cycle lane

Code: 331072-44



504 Single arm



508 Double arm



1491 Pole to be buried



1493 Pole with base



1477 Urban Pole - with base



1478 Urban Pole to be buried



1508 Fluted pole Ø 120 with base



1509 Fluted pole Ø 120