


3487 - Mini Giovi right (RH) - pedestrian crossings

Code: 331092-00

PHOTOMETRIC DATA

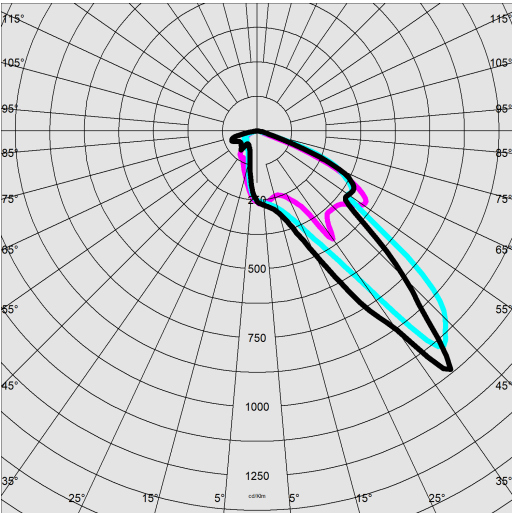

| | |
|------------------------------|--|
| Distribution type | Asymmetric |
| Lighting source | LED |
| CRI | 70 |
| Luminous flux (output) (lm) | 16010 lm |
| Power absorption (total) (W) | 100 W |
| CCT | 4000 K |
| Luminous efficacy (lm/W) | 160 lm/W |
| Low Flicker | luminaire with very low flicker: evenly distributed light for greater visual safety. |
| LED flux maintenance | 100000 hr, L 90, B 10 |


MECHANICAL CHARACTERISTICS

| | |
|-------------------------------|--------|
| Impact resistance rating (IK) | IK09 |
| IP | 66 |
| Ambient temperature - min | -30 °C |
| Ambient temperature - max | 50 °C |

3487 - Mini Giovi right (RH) - pedestrian crossings

Code: 331092-00

MATERIALS AND COLOURS

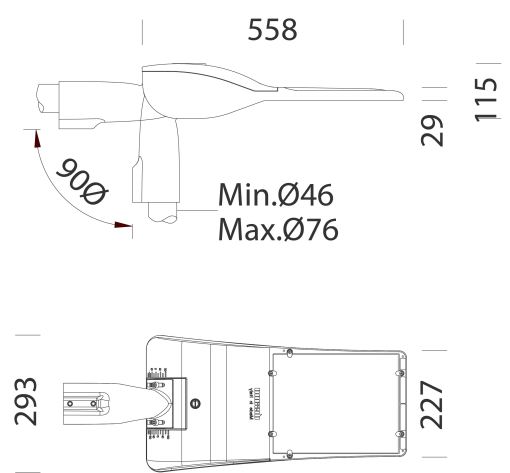

DOWNLOAD

MOUNTS

AssemblyInstructions giovi - minigiovi 09-22.pdf

DESIGNS

BIM 3487 MiniGiovi right - 04-24.zip

TechnicalDrawing minigiovi.dxf



| | |
|--------------------------------|--|
| Housing | EN-AB 47100 die-cast aluminium and designed with a very small surface exposed to wind. Cooling fins integrated in the cover. The lid can be removed to access the electrical components. |
| Optics | in high-performance PMMA resistant to high temperatures and UV rays. |
| Diffuser | extra-clear, tempered glass, 4 mm thick, resistant to thermal shock and impact (UNI-EN 12150-1:2001). |
| Heat sink | the heat sink is designed and made to allow the LEDs to operate at temperatures capable of ensuring excellent performance/output and long service life. |
| Pole connection | in die-cast aluminium for poles with a diameter between min. 46 mm and max. 76 mm, adjustable from -20° to +10° for side-mount applications; and from 0° to +20° for for top-mount applications. Tilt pitch 5°. |
| Coating | the fully automated powder-coating cycle involves a polyester-based, salt-spray corrosion-resistant and UV-stabilised paint., Anthracite = RAL 7021 |
| Special coating (UPON REQUEST) | Upon request: protective coating recommended for marine environments within 5 km (3 miles) of the sea. |
| Colour | Anthracite |
| Equipment | <ul style="list-style-type: none">- waterproof connector for quick installation with no need to open the fixture.- anti-condensation valve.- temperature controller with auto-reset.- EN 61547 compliant surge protection.- CLD PROG built-in functions. |

STANDARDS AND COMPLIANCE

| | |
|------------------------------|--|
| Photobiological safety class | RG0 Ethr |
| Markings and tests | CE, ENEC+, ZHAGA D4i, ENEC |
| Reference standards | EN60598-1. With degree of protection according to EN60529. Registered Design DM/100271. |
| Laboratory Tests | compliant with third-party certified vibration tests pursuant to ANSI C136.31: Street Lighting - Luminaire Vibration. Test level: 3.0G Level 2 for bridge/overpass applications. |
| Energy Label | C |

GEAR


| | |
|--------------|---|
| Upon request | <ul style="list-style-type: none">- virtual midnight device, subcode -30- Nema Socket, subcode -40 (cap to be ordered separately)- Zhaga Socket, subcode -0054 (cap included) |
|--------------|---|

WARRANTY


| | |
|----------------------|------|
| After sales warranty | 5 yr |
|----------------------|------|

3487 - Mini Giovi right (RH) - pedestrian crossings

Code: 331092-00



504 Single arm



508 Double arm



1491 Pole to be buried



1493 Pole with base



1477 Urban Pole - with base



1478 Urban Pole to be buried



1508 Fluted pole Ø 120 with base



1509 Fluted pole Ø 120