

1224 - Cromo - asymmetric 55°

Code: 411001-00

GENERAL INFORMATION



| | |
|---------|-------------------------------|
| Article | 1224 - Cromo - asymmetric 55° |
| Code | 411001-00 |

DIMENSIONS AND WEIGHT

| | |
|-------------|--------|
| Length (mm) | 865 mm |
| Width (mm) | 539 mm |
| Height (mm) | 79 mm |
| Weight (Kg) | 20 kg |

INSTALLATION

| | |
|------------------------------|--|
| Surface exposed to wind (mm) | L 63000 mm ² , F 370000 mm ² |
|------------------------------|--|

ELECTRICAL CHARACTERISTICS AND CONTROLS

| | |
|-------------------------------------|-------------|
| Voltage type | AC |
| Min Voltage (V) | 220 V |
| Max Voltage (V) | 240 V |
| Min Frequency (Hz) | 50 Hz |
| Max Frequency (Hz) | 60 Hz |
| Frequency (Hz) | 50 Hz |
| Wiring name | CLD |
| Power factor | ≥0.92 |
| Surge protector (common) (EN 61547) | 6 kV, 10 kV |
| Insulation class | Class I |
| Controllability | None |



With the latest generation of LED floodlights, it is possible to explore new outdoor lighting possibilities. The fixtures' compact dimensions make them minimally intrusive while the high efficiency and great colour rendering of the LED sources allow designers to create outdoor lighting projects with a surprising aesthetic impact, enhancing the architecture with scenic effects, and effectively illuminating large areas, such as gardens and terraces.

Among Disano's new proposals, CROMO LED represents an ideal solution to effectively replace the old 600 and 1000W discharge lamps. It is an environmentally friendly product that reduces energy consumption and improves light quality.

CROMO LED comes in a wide range of models, with different wattages, symmetric and asymmetric optics, and different beam angles. Noteworthy is the excellent lumen/Watt ratio, which results in excellent light efficiency.

The quality of CROMO LED is also seen in the accuracy of the design and construction details. It is a fixture with a slim shape for reduced wind exposure, a fundamental requirement in outdoor lighting systems. Moreover, the fixture is made of aluminium and equipped with lenses that ensure the best performance from the latest generation of LED sources.


All this results in bright, high-efficiency lighting to meet any outdoor lighting needs.



1224 - Cromo - asymmetric 55°

Code: 411001-00

PHOTOMETRIC DATA

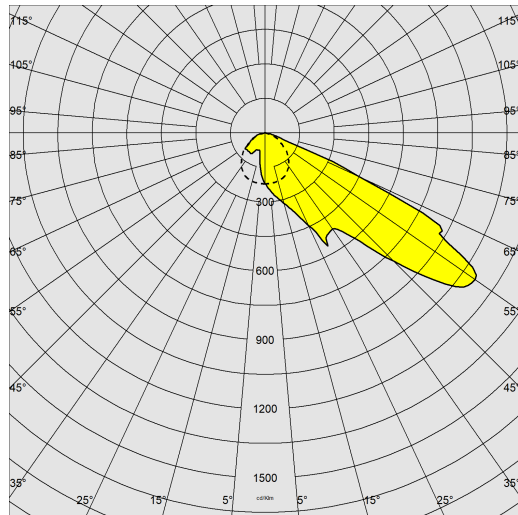

| | |
|------------------------------|--|
| Distribution type | Asymmetric |
| Lighting source | LED |
| CRI | 70 |
| Luminous flux (output) (lm) | 75318 lm |
| Power absorption (total) (W) | 590 W |
| CCT | 4000 K |
| Luminous efficacy (lm/W) | 128 lm/W |
| Low Flicker | luminaire with very low flicker: evenly distributed light for greater visual safety. |
| Colour consistency | SDCM4 |
| Asymmetry degrees | 55 ° |
| LED flux maintenance | 100000 hr, L 80, B 10 |




MECHANICAL CHARACTERISTICS

| | |
|-------------------------------|--------|
| Impact resistance rating (IK) | IK09 |
| IP | 66 |
| Ambient temperature - min | -40 °C |
| Ambient temperature - max | 45 °C |

1224 - Cromo - asymmetric 55°

Code: 411001-00

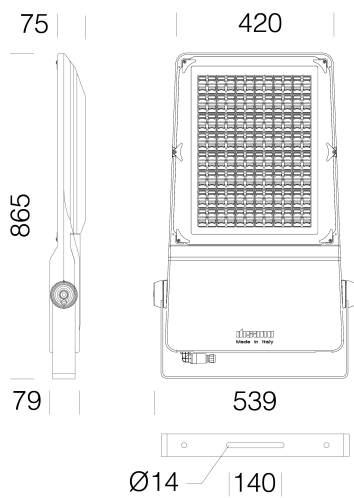

DOWNLOAD

MOUNTS

[AssemblyInstructions cromo 01-24.pdf](#)

DESIGNS

[BIM 1224 asym 55 11-23](#)

[TechnicalDrawing cromo.dxf](#)



MATERIALS AND COLOURS

| | |
|--------------------------------|---|
| Housing | EN-AB 47100 die-cast aluminium and designed with a very small surface exposed to wind. Cooling fins integrated in the cover. The lid can be removed to access the electrical components. |
| Optics | secondary lenses in high-performance and anti-yellowing PMMA. |
| Diffuser | extra-clear, tempered glass, 4 mm thick, resistant to thermal shock and impact (UNI-EN 12150-1:2001). |
| Heat sink | the heat sink is designed and made to allow the LEDs to operate at temperatures capable of ensuring excellent performance/output and long service life. |
| Coating | pre-treatment of metal surface, polyester powder coating to ensure resistance to corrosion and salt spray fogs, UV stabilised. |
| Special coating (UPON REQUEST) | upon request: available with coating tested to withstand corrosion tests in aggressive artificial atmospheres (UNI EN ISO 9227) or marine environments (sea front). |
| Colour | Anthracite |
| Equipment | <ul style="list-style-type: none"> - with galvanised and painted bracket - waterproof connector for quick installation with no need to open the fixture - EN 61547 compliant surge protection - anti-condensation valve - silicone rubber gasket - external screws and bolts in stainless steel |

STANDARDS AND COMPLIANCE

| | |
|------------------------------|--|
| Photobiological safety class | RG0 Ethr |
| Markings and tests | CE, ENEC |
| Reference standards | EN60598-1. With degree of protection according to EN60529. |
| Energy Label | C |

GEAR


| | |
|--------------|--|
| Upon request | <ul style="list-style-type: none"> - protection up to 10KV. - possibility of central light management or with external presence/light sensors - DIMM 1-10V version, subcode -12. with CLD D-D wiring (DALI), subcode -0041 |
|--------------|--|

WARRANTY

| | |
|----------------------|------|
| After sales warranty | 5 yr |
|----------------------|------|

1224 - Cromo - asymmetric 55°


Code: 411001-00



333 Connection for diam. 60 pole



334 Connection for diam. 76 pole



462 Protection grid



463 Conveyor