

1225 - Cromo - asymmetric 60°

Code: 411011-00

GENERAL INFORMATION



Article	1225 - Cromo - asymmetric 60°
Code	411011-00

DIMENSIONS AND WEIGHT

Length (mm)	865 mm
Width (mm)	539 mm
Height (mm)	79 mm
Weight (Kg)	20 kg

INSTALLATION

Surface exposed to wind (mm)	L 63000 mm ² , F 370000 mm ²
------------------------------	--

ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Min Frequency (Hz)	50 Hz
Max Frequency (Hz)	60 Hz
Frequency (Hz)	50 Hz
Wiring name	CLD
Power factor	≥0.92
Surge protector (common) (EN 61547)	6 kV, 10 kV
Insulation class	Class I
Controllability	None



With the latest generation of LED floodlights, it is possible to explore new outdoor lighting possibilities. The fixtures' compact dimensions make them minimally intrusive while the high efficiency and great colour rendering of the LED sources allow designers to create outdoor lighting projects with a surprising aesthetic impact, enhancing the architecture with scenic effects, and effectively illuminating large areas, such as gardens and terraces.

Among Disano's new proposals, CROMO LED represents an ideal solution to effectively replace the old 600 and 1000W discharge lamps. It is an environmentally friendly product that reduces energy consumption and improves light quality.

CROMO LED comes in a wide range of models, with different wattages, symmetric and asymmetric optics, and different beam angles. Noteworthy is the excellent lumen/Watt ratio, which results in excellent light efficiency.

The quality of CROMO LED is also seen in the accuracy of the design and construction details. It is a fixture with a slim shape for reduced wind exposure, a fundamental requirement in outdoor lighting systems. Moreover, the fixture is made of aluminium and equipped with lenses that ensure the best performance from the latest generation of LED sources.


All this results in bright, high-efficiency lighting to meet any outdoor lighting needs.



1225 - Cromo - asymmetric 60°

Code: 411011-00

PHOTOMETRIC DATA

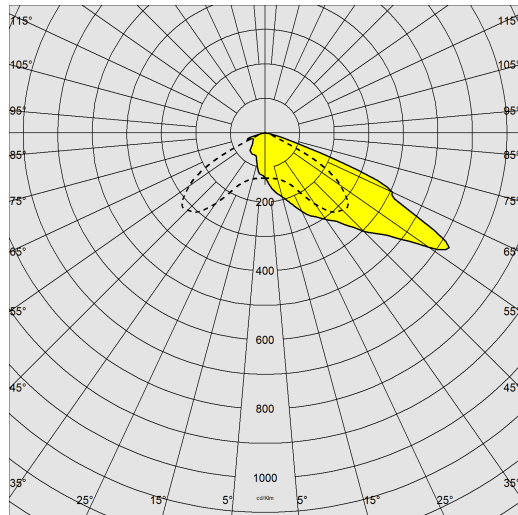

Distribution type	Asymmetric
Lighting source	LED
CRI	70
Luminous flux (output) (lm)	76027 lm
Power absorption (total) (W)	590 W
CCT	4000 K
Luminous efficacy (lm/W)	129 lm/W
Low Flicker	luminaire with very low flicker: evenly distributed light for greater visual safety.
Colour consistency	SDCM4
Asymmetry degrees	60 °
LED flux maintenance	100000 hr, L 80, B 10




MECHANICAL CHARACTERISTICS

Impact resistance rating (IK)	IK09
IP	66
Ambient temperature - min	-40 °C
Ambient temperature - max	45 °C

1225 - Cromo - asymmetric 60°

Code: 411011-00

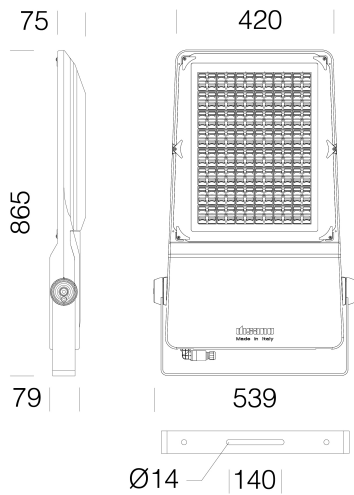

DOWNLOAD

MOUNTS

[AssemblyInstructions cromo 01-24.pdf](#)

DESIGNS

[BIM 1225 asym 60 11-23](#)

[TechnicalDrawing cromox.dxf](#)



MATERIALS AND COLOURS

Housing	EN-AB 47100 die-cast aluminium and designed with a very small surface exposed to wind. Cooling fins integrated in the cover. The lid can be removed to access the electrical components.
Optics	secondary lenses in high-performance and anti-yellowing PMMA.
Diffuser	extra-clear, tempered glass, 4 mm thick, resistant to thermal shock and impact (UNI-EN 12150-1:2001).
Heat sink	the heat sink is designed and made to allow the LEDs to operate at temperatures capable of ensuring excellent performance/output and long service life.
Coating	pre-treatment of metal surface, polyester powder coating to ensure resistance to corrosion and salt spray fogs, UV stabilised.
Special coating (UPON REQUEST)	upon request: available with coating tested to withstand corrosion tests in aggressive artificial atmospheres (UNI EN ISO 9227) or marine environments (sea front).
Colour	Anthracite
Equipment	<ul style="list-style-type: none"> - with galvanised and painted bracket - waterproof connector for quick installation with no need to open the fixture - EN 61547 compliant surge protection - anti-condensation valve - silicone rubber gasket - external screws and bolts in stainless steel

STANDARDS AND COMPLIANCE

Photobiological safety class	RG0 Ethr
Markings and tests	CE, ENEC
Reference standards	EN60598-1. With degree of protection according to EN60529.
Energy Label	C

GEAR


Upon request	<ul style="list-style-type: none"> - protection up to 10KV. - possibility of central light management or with external presence/light sensors - DIMM 1-10V version, subcode -12. with CLD D-D wiring (DALI), subcode -0041
--------------	--

WARRANTY


After sales warranty	5 yr
----------------------	------

1225 - Cromo - asymmetric 60°


Code: 411011-00



333 Connection for diam. 60 pole



334 Connection for diam. 76 pole



462 Protection grid



463 Conveyor