

1716 - Cripto medium - RGBW DMX-RDM

Code: 413068-00



Red= 392lm
Green= 1162lm
Blue= 175lm
White= 845lm (3000K) - 10°
max. 50W



GENERAL INFORMATION

Article	1716 - Cripto medium - RGBW DMX-RDM
Code	413068-00

DIMENSIONS AND WEIGHT

Length (mm)	428 mm
Width (mm)	294 mm
Height (mm)	65 mm
Weight (Kg)	4.9 kg

INSTALLATION

Surface exposed to wind (mm)	L 20500 mm², F 85500 mm²
------------------------------	--------------------------

ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Min Frequency (Hz)	50 Hz
Max Frequency (Hz)	60 Hz
Frequency (Hz)	50 Hz
Wiring name	CLD
Control interface	DMX
Power factor	≥0.9
Insulation class	Class I
Controllability	Yes (External control)

1716 - Cripto medium - RGBW DMX-RDM

Code: 413068-00

PHOTOMETRIC DATA

Lighting source	LED RGBW
CRI	-
Power absorption (total) (W)	50 W
CCT	3000 K
Beam angle	10 °
LED flux maintenance	80000 hr, L 80, B 20

MECHANICAL CHARACTERISTICS


Impact resistance rating (IK)	IK09
IP	66
Ambient temperature - min	-20 °C
Ambient temperature - max	40 °C



1716 - Cripto medium - RGBW DMX-RDM

Code: 413068-00

MATERIALS AND COLOURS

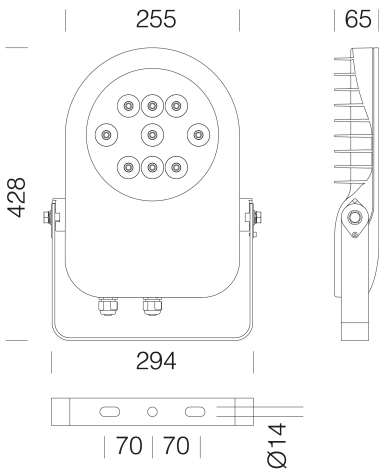

Housing	in die-cast aluminium, with cooling fins.
Diffuser	tempered glass, 4 mm thick, resistant to thermal shock and impact (UNI EN 12150-1:2001).
Heat sink	the heat sink is designed and made to allow the LEDs to operate at temperatures capable of ensuring excellent performance/output and long service life.
Coating	the fully automated powder-coating cycle involves a polyester-based, salt-spray corrosion-resistant and UV-stabilised paint.
Special coating (UPON REQUEST)	Upon request: protective coating recommended for marine environments within 5 km (3 miles) of the sea.
Colour	Graphite
Equipment	- with galvanised and painted bracket - silicone rubber gasket - external screws and bolts in stainless steel.

STANDARDS AND COMPLIANCE

Photobiological safety class	RG0 Ethr
Markings and tests	CE
Reference standards	EN60598-1. They have a degree of protection according to the EN60529 standard.
Energy Label	G

GEAR

Sensors	
Upon request	Upon request: version with 25° or 35° beam opening.

WARRANTY

After sales warranty	5 yr
----------------------	------

DOWNLOAD

MOUNTS

AssemblyInstructions cripto medium rgbw 01-26.pdf

DESIGNS

TechnicalDrawing 1716g.dxf



1716 - Cripto medium - RGBW DMX-RDM

Code: 413068-00

