


2150 - Radon HE - asymmetric 1 MODULE

Code: 413302-00

GENERAL INFORMATION

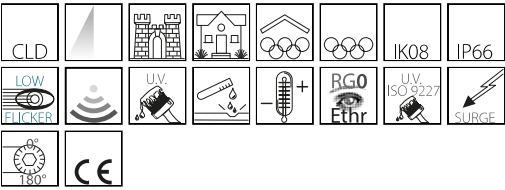

Radon in the floodlight version is very important in large surfaces, such as large public infrastructure or sports facilities. These fixtures must guarantee such features as robustness and reliability to ensure good lighting and long service life. These features, together with LED sources, are the main characteristics to create a lighting design that can guarantee good lighting and durability.

In the LED version, which can also be used for the relamping of old lighting installations, these floodlights offer outstanding performance in terms of energy savings, light quality and service life.

The fixtures of Disano's Radon LED series, made of aluminium with tempered glass, have all these qualities, starting with their extraordinary robustness, guaranteed by the superior quality of the materials and the anti-corrosion surface treatment.

Radon LED is available in asymmetric and symmetric versions. In addition to low flicker, Radon provides very important specifications for the safety and visual comfort of workers or athletes.

Radon LED is also a great investment for its long lifetime. These floodlights are ideal for installation in large areas or medium to large sports facilities. They allow high energy savings thanks to high luminous efficacy values.



Article	2150 - Radon HE - asymmetric 1 MODULE
Code	413302-00

DIMENSIONS AND WEIGHT

Length (mm)	285 mm
Width (mm)	832 mm
Height (mm)	176 mm
Weight (Kg)	15.985 kg

INSTALLATION

Surface exposed to wind (mm)	L 120400 mm², F 175300 mm²
------------------------------	----------------------------


ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Min Frequency (Hz)	50 Hz
Max Frequency (Hz)	60 Hz
Frequency (Hz)	50 Hz
Wiring name	CLD
Wiring	power supply 220-240V 50/60Hz; with external IP66 driver on board the fixture.
Power factor	≥0.95
Surge protector (common) (EN 61547)	4 kV, 6 kV
Insulation class	Class I
Controllability	None

2150 - Radon HE - asymmetric 1 MODULE

Code: 413302-00

PHOTOMETRIC DATA

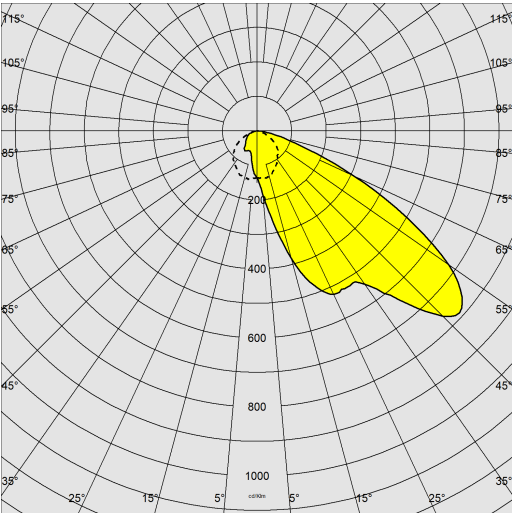

Distribution type	Asymmetric
Lighting source	LED COB
CRI	≥70
Luminous flux (output) (lm)	60715 lm
Power absorption (total) (W)	408 W
CCT	4000 K
Luminous efficacy (lm/W)	149 lm/W
Low Flicker	luminaire with very low flicker: evenly distributed light for greater visual safety.
Asymmetry degrees	50 °
LED flux maintenance	50000 hr, L 80, B 20

MECHANICAL CHARACTERISTICS


Impact resistance rating (IK)	IK08
IP	66
Ambient temperature - min	-40 °C
Ambient temperature - max	40 °C



2150 - Radon HE - asymmetric 1 MODULE

Code: 413302-00

MATERIALS AND COLOURS

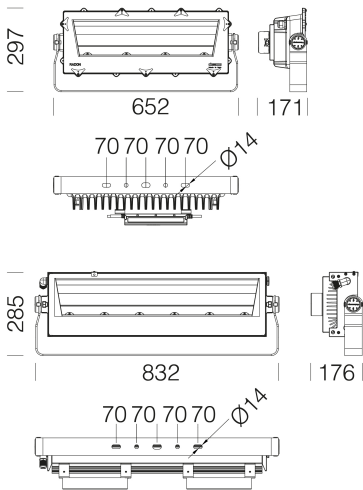

DOWNLOAD

MOUNTS

AssemblyInstructions radon hp-he 09-22.pdf

DESIGNS

TechnicalDrawing 2150e.dxf



Housing	aluminium.
Optics	in high-performance and anti-glare matt aluminium.
Diffuser	tempered glass, 4 mm thick, resistant to thermal shock and impact (UNI EN 12150-1:2001).
Heat sink	the heat sink is designed and made to allow the LEDs to operate at temperatures capable of ensuring excellent performance/output and long service life.
Coating	pre-treatment of metal surface, polyester powder coating to ensure resistance to corrosion and salt spray fogs, UV stabilised.
Special coating (UPON REQUEST)	upon request: available with coating tested to withstand corrosion tests in aggressive artificial atmospheres (UNI EN ISO 9227) or marine environments (sea front).
Colour	Anthracite
Equipment	<ul style="list-style-type: none"><li>- with galvanised and painted bracket</li><li>- waterproof connector for quick installation with no need to open the fixture</li><li>- EN 61547 compliant surge protection.</li><li>- anti-condensation valve</li><li>- goniometric scale</li><li>- silicone rubber gasket</li><li>- external screws and bolts in stainless steel</li></ul>

STANDARDS AND COMPLIANCE

Photobiological safety class	RG0 Ethr
Markings and tests	CE
Reference standards	EN60598-1. With degree of protection according to EN60529.
Energy Label	D

GEAR

Upon request	<ul style="list-style-type: none"><li>- protection up to 10KV.</li><li>- possibility of central light management or with external presence/light sensors</li><li>- with CLD D-D wiring (DALI), subcode -0041</li></ul>
--------------	--

WARRANTY

After sales warranty	5 yr
----------------------	------

2150 - Radon HE - asymmetric 1 MODULE

Code: 413302-00

