

1838 - Sicura - asymmetric

Code: 414282-39



Sicura is a linear lighting fixture with an aluminum housing made to enhance architectural lighting designs, providing uniform light and high performance. It is ideal for outdoor and indoor applications, and has a high degree of protection IP67. Available in several versions with a wide range of optics.



GENERAL INFORMATION

Article	1838 - Sicura - asymmetric
Code	414282-39

DIMENSIONS AND WEIGHT

Length (mm)	1490 mm
Width (mm)	112 mm
Height (mm)	100 mm
Weight (Kg)	10.2 kg


ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Min Frequency (Hz)	50 Hz
Max Frequency (Hz)	60 Hz
Frequency (Hz)	50 Hz
Wiring name	CLD
Power factor	≥0.9
Insulation class	Class II
Controllability	None

1838 - Sicura - asymmetric

Code: 414282-39

PHOTOMETRIC DATA

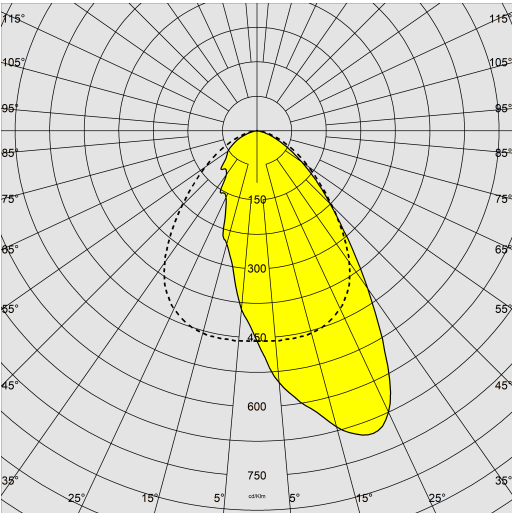

Distribution type	Asymmetric
Lighting source	LED
CRI	>80
Luminous flux (output) (lm)	6624 lm
Power absorption (total) (W)	54 W
CCT	3000 K
Luminous efficacy (lm/W)	123 lm/W
LED flux maintenance	50000 hr, L 80, B 20


MECHANICAL CHARACTERISTICS

Impact resistance rating (IK)	IK08
Max load	2000 kg
Walkover	True
Driveover	True
IP	67

1838 - Sicura - asymmetric

Code: 414282-39

MATERIALS AND COLOURS

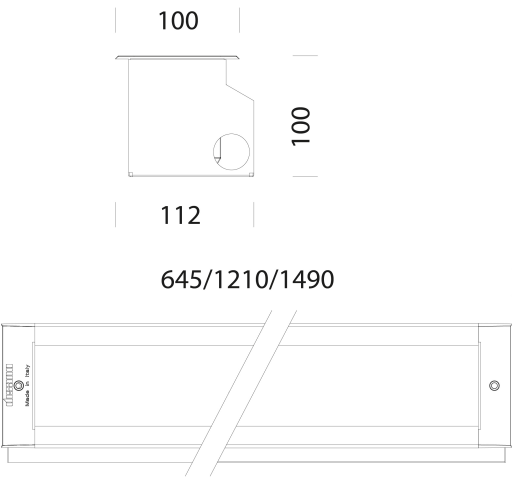

645/1210/1490

DOWNLOAD

MOUNTS

AssemblyInstructions 1748-1836-1838 02-26.pdf

DESIGNS

TechnicalDrawing 1838f.dxf



Housing	extruded aluminium with recessed body for continuous row mounting.
Optics	in high-performance prismatic and polished aluminium.
Diffuser	tempered glass, 8 mm thick, resistant to thermal shock and impact and loads of up to 2000 kg (UNI EN 12150-1:2001).
Coating	the fully automated powder-coating cycle involves a polyester-based, salt-spray corrosion-resistant and UV-stabilised paint.
Colour	Grey
Equipment	with electrical cable.
	driveway lamp. Keep clear.

STANDARDS AND COMPLIANCE

Photobiological safety class	RG0
Markings and tests	CE
Reference standards	EN60598-1. They have a degree of protection according to the EN60529 standard.
Laboratory Tests	the luminaire passed the static load resistance test (EN 60598-2-13) with an applied weight of 40KN equal to 2000 kg.
Energy Label	C

GEAR


Sensors	
Upon request	with watertight IP68 connector for line connection.

WARRANTY

After sales warranty	3 yr
----------------------	------

1838 - Sicura - asymmetric

Code: 414282-39



905 Bracket for false ceiling