


1279 - Onda LED

Code: 420322-00

GENERAL INFORMATION

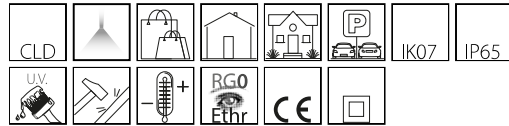

Article	1279 - Onda LED
Code	420322-00

DIMENSIONS AND WEIGHT

Length (mm)	400 mm
Width (mm)	155 mm
Height (mm)	165 mm
Weight (Kg)	3.9 kg

ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Min Frequency (Hz)	50 Hz
Max Frequency (Hz)	60 Hz
Frequency (Hz)	50 Hz
Wiring name	CLD
Power factor	≥0.9
Insulation class	Class II
Controllability	None




1279 Onda LED



1279 - Onda LED

Code: 420322-00

PHOTOMETRIC DATA

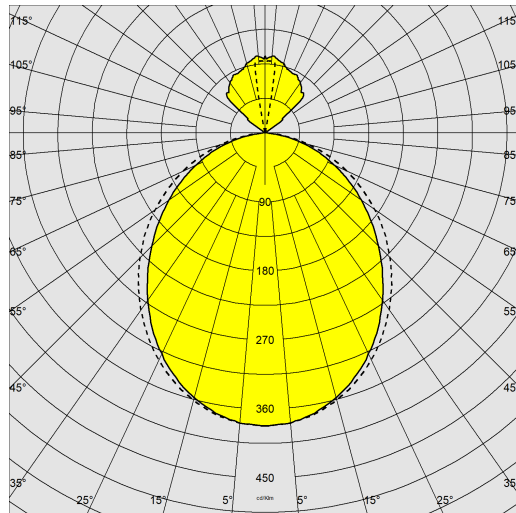

Lighting source	LED 2.2w + 13.2White
CRI	≥80
Luminous flux (output) (lm)	800 lm
Power absorption (total) (W)	17 W
CCT	4000 K
Luminous efficacy (lm/W)	47 lm/W
LED flux maintenance	80000 hr, L 80, B 20

MECHANICAL CHARACTERISTICS


Impact resistance rating (IK)	IK07
IP	65



1279 - Onda LED

Code: 420322-00

MATERIALS AND COLOURS

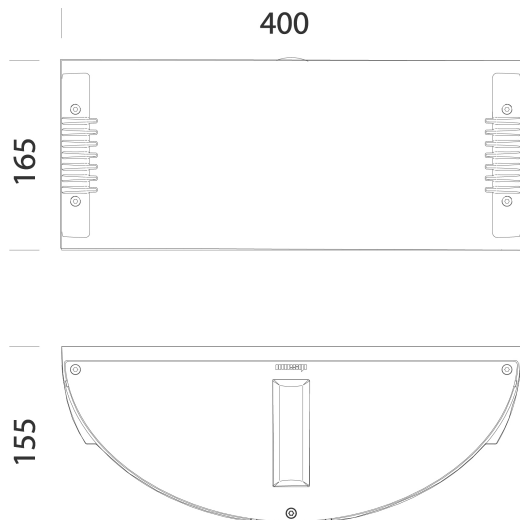

Housing	in die-cast aluminium.
Diffuser	tempered glass, 8 mm thick, resistant to thermal shock and impact (UNI EN 12150-1:2001).
Coating	the fully automated powder-coating cycle involves a polyester-based, salt-spray corrosion-resistant and UV-stabilised paint.
Special coating (UPON REQUEST)	Upon request: protective coating recommended for marine environments within 5 km (3 miles) of the sea.
Colour	White
Equipment	<ul style="list-style-type: none"> - during installation the frame stays attached via a safety hinge mechanism that prevents it from dropping down accidentally. - with wall mounting plate. - gasket in eco-friendly material.

STANDARDS AND COMPLIANCE

Photobiological safety class	RG0
Markings and tests	CE
Reference standards	EN60598-1. They have a degree of protection according to the EN60529 standard.
Energy Label	C

WARRANTY

After sales warranty	3 yr
----------------------	------

DOWNLOAD

MOUNTS

[AssemblyInstructions onda 04-23.pdf](#)

DESIGNS

[BIM 1279 Onda LED - 20200611.zip](#)

[TechnicalDrawing 1279.dxf](#)

