


1556 - Brick - direct and indirect light

Code: 420602-68

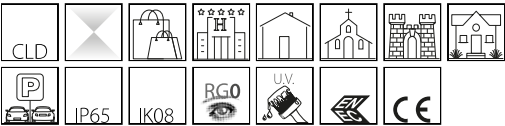

The façade of public buildings, churches or even residences add great artistic and symbolic value to a place. Light can enhance this value by seamlessly blending into the surrounding urban environment. However, this can be achieved only with efficient and reliable fixtures that can easily adjust to any setting.

This is why we designed Brick: with its modern and simple shape, especially suited to different architectonic contexts, this fixture does not simply light up routes, stairways, porticos, entrance halls and external architectural elements but it can also reveal them in all their artistic beauty.

Thanks to the multiple light effects, Brick, in the wall-mounted version, allows an excellent diffusion of light and creates spectacular settings.



GENERAL INFORMATION

Article	1556 - Brick - direct and indirect light
Code	420602-68

DIMENSIONS AND WEIGHT

Length (mm)	270 mm
Width (mm)	125 mm
Height (mm)	113 mm
Weight (Kg)	2.3 kg


ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Min Frequency (Hz)	50 Hz
Max Frequency (Hz)	60 Hz
Frequency (Hz)	50 Hz
Wiring name	CLD
Power factor	≥0.9
Insulation class	Class I
Controllability	None

1556 - Brick - direct and indirect light

Code: 420602-68

PHOTOMETRIC DATA

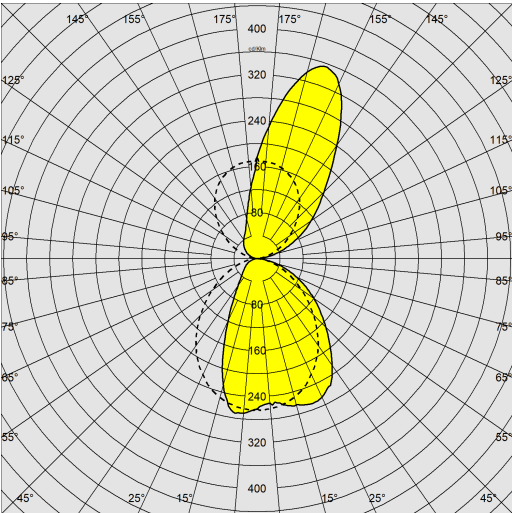

Lighting source	LED
CRI	80
Luminous flux (output) (lm)	1695 lm
Power absorption (total) (W)	19 W
CCT	4000 K
Luminous efficacy (lm/W)	89 lm/W
LED flux maintenance	50000 hr, L 90, B 10

MECHANICAL CHARACTERISTICS


Impact resistance rating (IK)	IK08
IP	65



1556 - Brick - direct and indirect light

Code: 420602-68

MATERIALS AND COLOURS

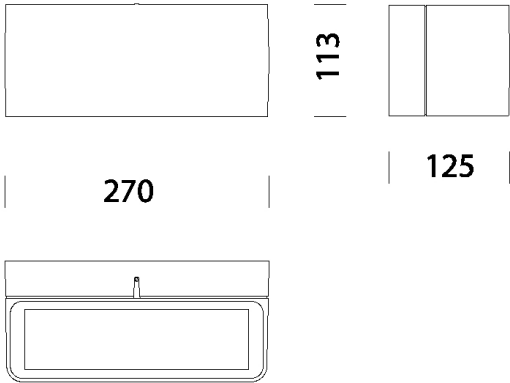

Housing	in die-cast aluminium.
Diffuser	tempered glass, 4 mm thick, resistant to thermal shock and impact (UNI EN 12150-1:2001).
Coating	the fully automated powder-coating cycle involves a polyester-based, salt-spray corrosion-resistant and UV-stabilised paint.
Special coating (UPON REQUEST)	Upon request: protective coating recommended for marine environments within 5 km (3 miles) of the sea.
Colour	Graphite
Equipment	- with wall mounting plate. - complete with waterproof connector for line connection.

EMERGENCY LIGHTING

Emergency power supply type	Not present
-----------------------------	-------------

STANDARDS AND COMPLIANCE

Photobiological safety class	RG0
Markings and tests	CE, ENEC
Reference standards	EN60598-1. They have a degree of protection according to the EN60529 standard.
Energy Label	C

WARRANTY

After sales warranty	3 yr
----------------------	------

DOWNLOAD

MOUNTS
AssemblyInstructions brick 04-23.pdf
DESIGNS
BIM 1556 Brick.zip
TechnicalDrawing 1556i.dxf
TechnicalDrawing3D disano 1556 brick.3ds

