


## 1558 - Brick - direct light

Code: 420622-00

### GENERAL INFORMATION

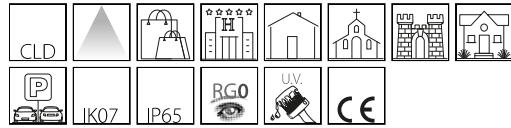

|         |                             |
|---------|-----------------------------|
| Article | 1558 - Brick - direct light |
| Code    | 420622-00                   |

### DIMENSIONS AND WEIGHT

|             |        |
|-------------|--------|
| Length (mm) | 270 mm |
| Width (mm)  | 125 mm |
| Height (mm) | 113 mm |
| Weight (Kg) | 2.3 kg |

### ELECTRICAL CHARACTERISTICS AND CONTROLS

|                    |         |
|--------------------|---------|
| Voltage type       | AC      |
| Min Voltage (V)    | 220 V   |
| Max Voltage (V)    | 240 V   |
| Min Frequency (Hz) | 50 Hz   |
| Max Frequency (Hz) | 60 Hz   |
| Frequency (Hz)     | 50 Hz   |
| Wiring name        | CLD     |
| Power factor       | ≥0.9    |
| Insulation class   | Class I |
| Controllability    | None    |



The façade of public buildings, churches or even residences add great artistic and symbolic value to a place. Light can enhance this value by seamlessly blending into the surrounding urban environment. However, this can be achieved only with efficient and reliable fixtures that can easily adjust to any setting.

This is why we designed Brick: with its modern and simple shape, especially suited to different architectonic contexts, this fixture does not simply light up routes, stairways, porticos, entrance halls and external architectural elements but it can also reveal them in all their artistic beauty.


Thanks to the multiple light effects, Brick, in the wall-mounted version, allows an excellent diffusion of light and creates spectacular settings.



## 1558 - Brick - direct light

Code: 420622-00

### PHOTOMETRIC DATA

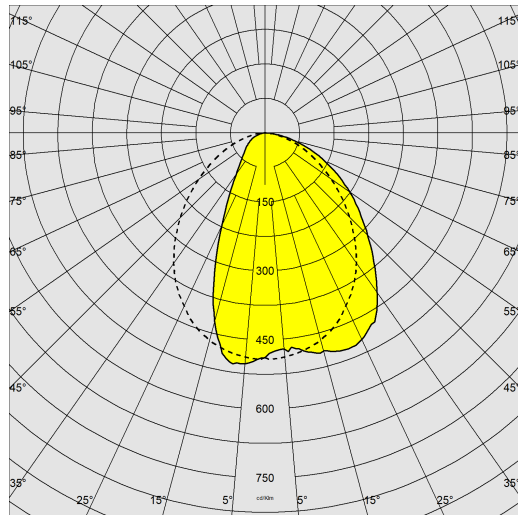

|                              |                      |
|------------------------------|----------------------|
| Lighting source              | LED                  |
| CRI                          | 80                   |
| Luminous flux (output) (lm)  | 730 lm               |
| Power absorption (total) (W) | 10 W                 |
| CCT                          | 3000 K               |
| Luminous efficacy (lm/W)     | 73 lm/W              |
| LED flux maintenance         | 50000 hr, L 80, B 20 |

### MECHANICAL CHARACTERISTICS


|                               |      |
|-------------------------------|------|
| Impact resistance rating (IK) | IK07 |
| IP                            | 65   |



# 1558 - Brick - direct light

Code: 420622-00

## MATERIALS AND COLOURS

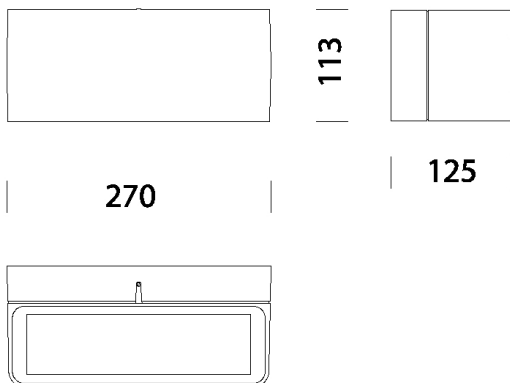

|                                |   |
|--------------------------------|---|
| Housing                        | in die-cast aluminium.  |
| Diffuser                       | tempered glass, 4 mm thick, resistant to thermal shock and impact (UNI EN 12150-1:2001).  |
| Coating                        | pre-treatment of metal surface, polyester powder coating to ensure resistance to corrosion and salt spray fogs, UV stabilised.                                      |
| Special coating (UPON REQUEST) | upon request: available with coating tested to withstand corrosion tests in aggressive artificial atmospheres (UNI EN ISO 9227) or marine environments (sea front). |
| Colour                         | Graphite  |
| Equipment                      | - with wall mounting plate.<br>- complete with waterproof connector for line connection.  |

## STANDARDS AND COMPLIANCE

|                              |  |
|------------------------------|--|
| Photobiological safety class | RG0  |
| Markings and tests           | CE   |
| Reference standards          | EN60598-1. With degree of protection according to EN60529. |
| Energy Label                 | C  |

## DOWNLOAD

### MOUNTS

[AssemblyInstructions brick 04-23.pdf](#)

### DESIGNS

[BIM 1558 Brick.zip](#)

[TechnicalDrawing 1558i.dxf](#)

[TechnicalDrawing3D disano 1558 brick.3ds](#)



## WARRANTY

|                      |      |
|----------------------|------|
| After sales warranty | 3 yr |
|----------------------|------|