
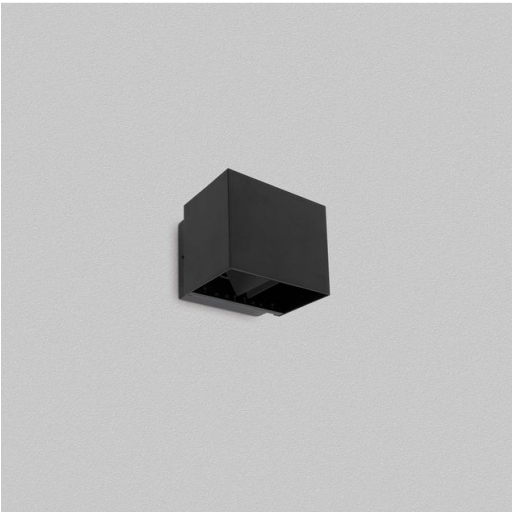


1593 - Swinging - adjustable beam

Code: 420664-00

GENERAL INFORMATION

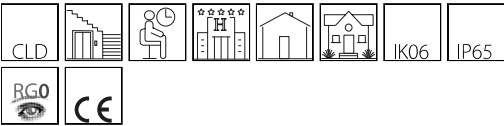

Swinging is a wall sconce that provides a wide range of lighting effects by adjusting the fins to the desired light beam angle from 30° to 120°. Its high degree of protection (IP65) makes it ideal for indoor and outdoor lighting applications.



Article	1593 - Swinging - adjustable beam
Code	420664-00

DIMENSIONS AND WEIGHT

Length (mm)	120 mm
Width (mm)	98 mm
Height (mm)	100 mm
Weight (Kg)	0.5 kg

ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Min Frequency (Hz)	50 Hz
Max Frequency (Hz)	60 Hz
Frequency (Hz)	50 Hz
Wiring name	CLD
Power factor	>0.9
Insulation class	Class I
Controllability	None

1593 - Swinging - adjustable beam

Code: 420664-00



PHOTOMETRIC DATA

Lighting source	LED
CRI	>80
Luminous flux (output) (lm)	830 lm
Power absorption (total) (W)	10 W
CCT	3000 K
LED flux maintenance	50000 hr, L 90, B 10

MECHANICAL CHARACTERISTICS

Impact resistance rating (IK)	IK06
IP	65

1593 - Swinging - adjustable beam

Code: 420664-00

MATERIALS AND COLOURS

Housing	in painted aluminium.
Diffuser	clear polycarbonate diffuser
Colour	Black
Equipment	designed for wall-mounting

EMERGENCY LIGHTING


Emergency power supply type	Not present
-----------------------------	-------------

STANDARDS AND COMPLIANCE

Photobiological safety class	RG0
Markings and tests	CE
Reference standards	EN60598-1. They have a degree of protection according to the EN60529 standard.
Energy Label	E

WARRANTY

After sales warranty	3 yr
----------------------	------

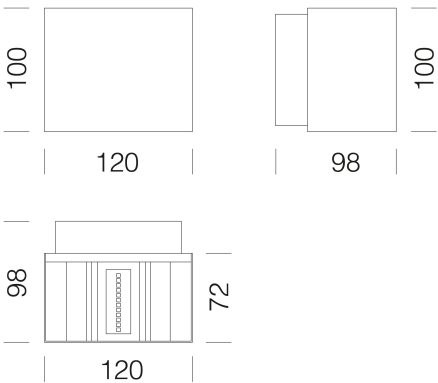

DOWNLOAD

MOUNTS

AssemblyInstructions 1593 11-23.pdf

DESIGNS

TechnicalDrawing 1593.dxf

